

SYLBATTEN IP20 L1800 SINGLE 4000K
0045161



Features


- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 24W, 3250 lum, 4000K, 25000h lifetime

Product Overview


Product name	SYLBATTEN IP20 L1800 SINGLE 4000K
Technology	LED
Cap/Base	N/A
General application	Residential & Consumer
ETIM Class	EC000109
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class I
Dimmable	No
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451619
Warranty	2 years
Dimming method	N/A

SYLBATTEN IP20 L1800 SINGLE 4000K
0045161

Photometry

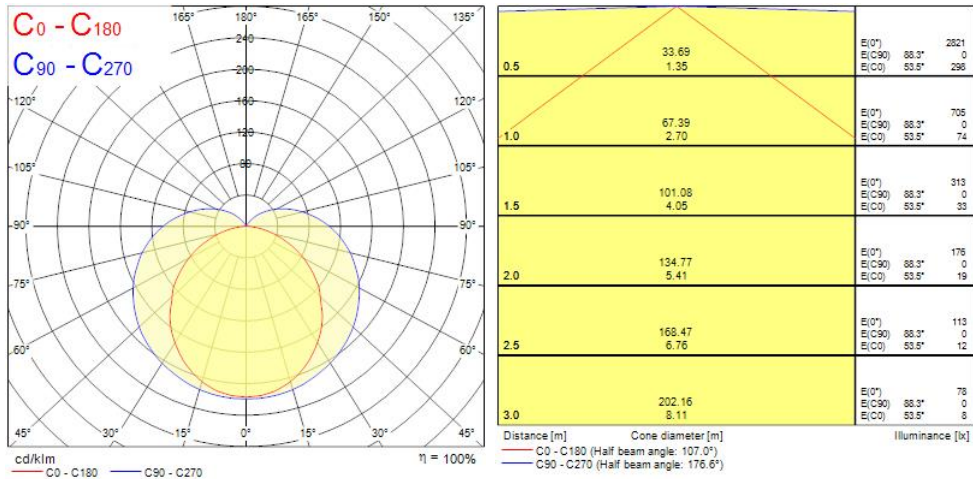

Technical drawings

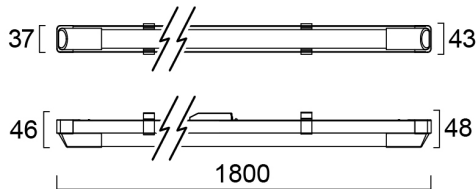

Data table

GENERAL DATA

Product name SYLBATTEN IP20 L1800 SINGLE 4000K

SYLBATTEN IP20 L1800 SINGLE 4000K 0045161

Technology	LED
Cap/Base	N/A
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	2 years

OPTICAL DATA

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	135
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	55
Energy Efficiency Class (A->G) of contained light source	D, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	33
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	18

SYLBATTEN IP20 L1800 SINGLE 4000K 0045161

Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	28

LIFETIME DATA

Lifespan L70 B50	25000
------------------	-------

PHYSICAL DATA

IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1800
Nominal Product Width (mm)	43
Nominal Product Height (mm)	48
Weight (kg)	0.54

PACKAGING

Product EAN number	5410288451619
Packaging single length / height (cm)	180.0
Packaging single width (cm)	4.25
Packaging single depth (cm)	4.72
DUN14 (inner)	15410288451616
Units per outer package	20
Packaging outer length / height (cm)	182.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	25.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No