
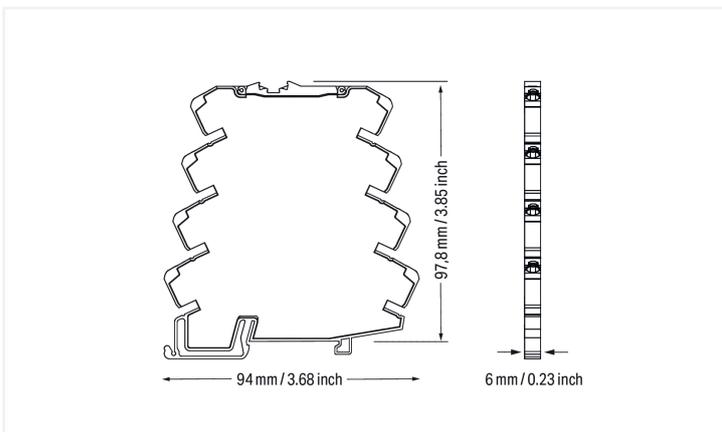
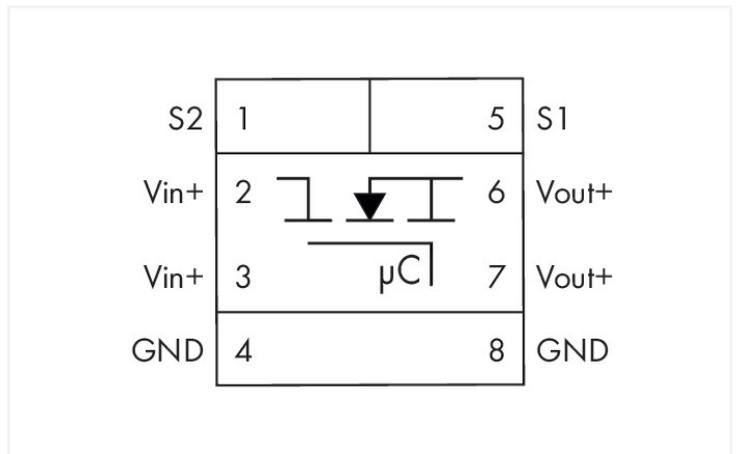
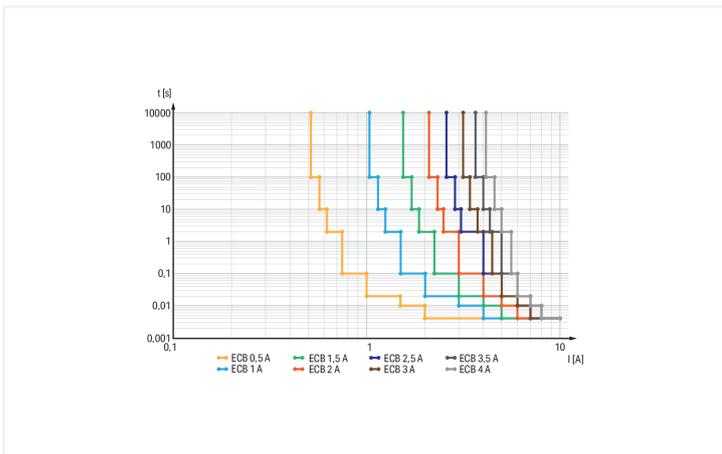
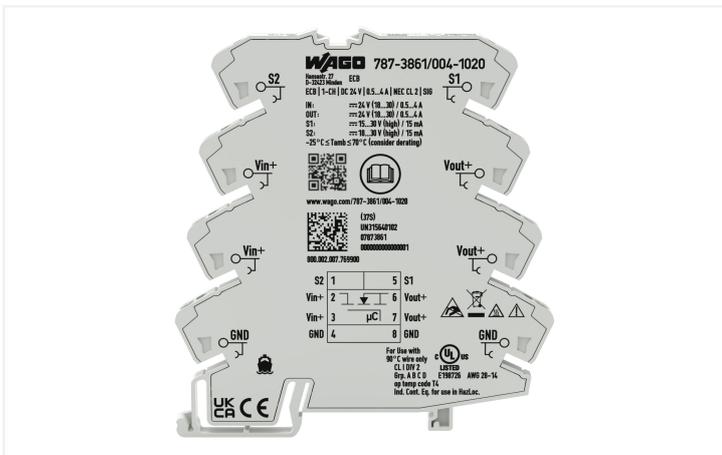


# Data Sheet | Item Number: 787-3861/004-1020

Electronic circuit breaker; 1-channel; 24 VDC input voltage; adjustable 0.5 ... 4 A;  
NEC Class 2; Signal contact

<https://www.wago.com/787-3861/004-1020>

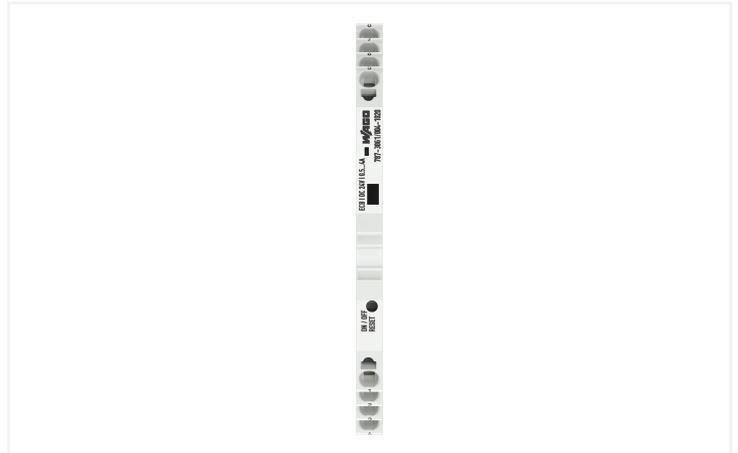

**Features:**

- Space-saving ECB with one channel
- Reliably and safely trips in the event of an overload and short circuit on the secondary side
- Switch-on capacity < 7,000  $\mu$ F
- Enables the use of an economical, standard power supply
- Minimizes wiring via two voltage outputs and maximizes commoning options on both input and output sides (e.g., commoning of the output voltage on 857 and 2857 Series devices)
- Status signal – adjustable as single or group message
- Reset, switch on/off via remote input or local switch
- Prevents power supply overload due to total inrush current thanks to time-delayed switching on during interconnected operation

**Notes**

Note	The device is designed for use in SELV circuits. Depending on the output current, please use the approved minimum conductor cross-sections.
------	---

**Technical data****Input**

Nominal input voltage $U_{i, nom}$	24 VDC
Input voltage range	18 ... 30 VDC

**Output**

Total number of channels (module)	1
Nominal output voltage $U_{o, nom}$	1 x 24 VDC
Output voltage range	18 ... 30 VDC ( $U_e$ – voltage drop)
Voltage drop	$\leq 40$ mV (0.5 A); $\leq 80$ mV (1 A); $\leq 120$ mV (1.5 A); $\leq 160$ mV (2 A); $\leq 200$ mV (2.5 A); $\leq 240$ mV (3 A); $\leq 280$ mV (3.5 A); $\leq 320$ mV (4 A)
Nominal output current $I_{o, nom}$	1 x 0.5 / 1 / 1.5 / 2 / 2.5 / 3 / 3.5 / 4 A (adjustable)
Default Setting	DC 0.5 A; switched off
Trip time	10 ms ... 90 s (load-dependent)
Switch-on capacity	
Switch-on behavior	Time-delayed channel switching (load-dependent, min. 0 ms / max. 500 ms)
Current limitation	No
Switch-on threshold	DC 20.3 V

**Signaling and Communication**

Signaling	1 x Status LED (green/yellow/red) 1 x Signal output (18 ... 30 VDC, max. 0.015 A), default setting: tripped
Operation status indicator	Green LED (channel OK) Red LED (channel switched off)
Remote input	1 x Control input (15 ... 30 VDC (active high); 0 ... 5 VDC (active low); max. 0.015 A)

**Efficiency/Power Losses**

Power loss $P_1$	$\leq 0.4$ W (no load)
Efficiency (typ.)	98 %

**Circuit Protection**

Internal fuse	T 4 A
---------------	-------

**Safety and protection**

Isolation voltage (connectors – housing)	1.5 kVDC	MTBF	807,840 h
Protection class	III		
Protection type	IP20; per EN 60529		
Reverse voltage protection	No		
Transient suppression (primary)	Suppressor diode (33 V)		
Parallel operation of single channels	Not permitted		
Series operation	No		

### Insulation coordination (UL)

Overvoltage category	II
Pollution degree	2

### Insulation coordination

Overvoltage category	II
Pollution degree	2

### Connection Data

Number of jumper slots	8
------------------------	---

### Connection 1

Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 26 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Note (conductor cross-section)	Depending on the output current, use the conductor cross-sections tested and approved by UL: 26 ... 14 AWG (0.5 A); 24 ... 14 AWG (1 A / 1.5 A); 22 ... 14 AWG (2 A / 2.5 A); 20 ... 14 AWG (3 A / 3.5 A / 4 A)

### Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	0.634 MJ
Weight	55.7 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	No derating
Operating altitude	≤ 2000 m (a.s.l.)

### Standards and Specifications

Conformity marking	CE; UKCA
Standards/specifications	EN 61000-6-2 EN 61000-6-3 UL 61010-2-201 DNV UL 1310 (NEC Class 2) UL 2367

### Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	IN
Customs tariff number	85362010900

### Product Classification

UNSPSC	39121601
ETIM 9.0	EC001440
ETIM 10.0	EC001440
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

CAS-No.	11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	d4bc65a9-4bc9-44a7-8802-07993f09f471
SCIP notification number (Belgium)	42d9de72-f436-4fd2-a5e2-13fdbdd41555
SCIP notification number (Bulgaria)	bf3d6373-410d-47ca-a36d-3b5007a0a85d
SCIP notification number (Czech Republic)	000c8e3f-b53a-4a0a-a94a-7a0885294193
SCIP notification number (Denmark)	dd9e285a-86de-4358-8f2d-3e41da297fe1
SCIP notification number (Finland)	3a32b4c2-532c-4497-80cc-211048a63cf4
SCIP notification number (France)	566ff00e-df36-4791-9059-34ddd6ee25e
SCIP notification number (Germany)	25035195-9eef-46e1-bc88-8aeeb1d90b0c
SCIP notification number (Hungary)	d3cb52fe-3908-4c29-8117-4c3c8fe9571d
SCIP notification number (Italy)	b9aefcec-4d77-451d-920c-5e5d0a2f89c8
SCIP notification number (Netherlands)	64e25cff-42e2-4045-a796-679ab9152a3b
SCIP notification number (Poland)	1feec300-c81d-4a7a-a797-c69efdd8e346
SCIP notification number (Romania)	550a0dbd-2911-45b6-ba22-561b443f0e24
SCIP notification number (Sweden)	745f466b-ae9b-4383-b17e-c48ce860045e

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	UL E175199 Vol.3 Sec.5
UR Underwriters Laboratories Inc.	-	E175199

#### Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00001D1

Approvals for hazardous areas



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (HAZARDOUS LOCA- TIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-3861/004-1020

Documentation

Manual			
Product Manual Elec- tronic circuit breaker	V 1.0.0 25.03.2024	pdf 7611.71 KB	

Instruction Leaflet			
Electronic Circuit Brea- ker	V 1.1.1 11.09.2023	pdf 2491.12 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 787-3861/004-1020	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Jumper

1.1.1.1 Jumper



[Item No.: 859-410/000-006](#)  
Jumper; for jumper slot; 10-way; insula-  
ted; blue



[Item No.: 859-410](#)  
Jumper; for jumper slot; 10-way; insula-  
ted; light gray



[Item No.: 859-410/000-005](#)  
Jumper; for jumper slot; 10-way; insula-  
ted; red



[Item No.: 859-410/000-029](#)  
Jumper; for jumper slot; 10-way; insula-  
ted; yellow



[Item No.: 859-402/000-006](#)  
Jumper; for jumper slot; 2-way; insulated;  
blue



[Item No.: 859-402](#)  
Jumper; for jumper slot; 2-way; insulated;  
light gray



[Item No.: 859-402/000-029](#)  
Jumper; for jumper slot; 2-way; insulated;  
yellow



[Item No.: 859-403/000-006](#)  
Jumper; for jumper slot; 3-way; insulated;  
blue



[Item No.: 859-403](#)  
Jumper; for jumper slot; 3-way; insulated;  
light gray



[Item No.: 859-403/000-005](#)  
Jumper; for jumper slot; 3-way; insulated;  
red



[Item No.: 859-403/000-029](#)  
Jumper; for jumper slot; 3-way; insulated;  
yellow



[Item No.: 859-404/000-006](#)  
Jumper; for jumper slot; 4-way; insulated;  
blue



[Item No.: 859-404](#)  
Jumper; for jumper slot; 4-way; insulated;  
light gray



[Item No.: 859-404/000-005](#)  
Jumper; for jumper slot; 4-way; insulated;  
red



[Item No.: 859-404/000-029](#)  
Jumper; for jumper slot; 4-way; insulated;  
yellow



[Item No.: 859-405/000-006](#)  
Jumper; for jumper slot; 5-way; insulated;  
blue



1.1.1.1 Jumper

 <b>Item No.: 859-405</b> Jumper; for jumper slot; 5-way; insulated; light gray	 <b>Item No.: 859-405/000-005</b> Jumper; for jumper slot; 5-way; insulated; red	 <b>Item No.: 859-405/000-029</b> Jumper; for jumper slot; 5-way; insulated; yellow	 <b>Item No.: 859-406/000-006</b> Jumper; for jumper slot; 6-way; insulated; blue
 <b>Item No.: 859-406</b> Jumper; for jumper slot; 6-way; insulated; light gray	 <b>Item No.: 859-406/000-005</b> Jumper; for jumper slot; 6-way; insulated; red	 <b>Item No.: 859-406/000-029</b> Jumper; for jumper slot; 6-way; insulated; yellow	 <b>Item No.: 859-407/000-006</b> Jumper; for jumper slot; 7-way; insulated; blue
 <b>Item No.: 859-407</b> Jumper; for jumper slot; 7-way; insulated; light gray	 <b>Item No.: 859-407/000-005</b> Jumper; for jumper slot; 7-way; insulated; red	 <b>Item No.: 859-407/000-029</b> Jumper; for jumper slot; 7-way; insulated; yellow	 <b>Item No.: 859-408/000-006</b> Jumper; for jumper slot; 8-way; insulated; blue
 <b>Item No.: 859-408</b> Jumper; for jumper slot; 8-way; insulated; light gray	 <b>Item No.: 859-408/000-005</b> Jumper; for jumper slot; 8-way; insulated; red	 <b>Item No.: 859-408/000-029</b> Jumper; for jumper slot; 8-way; insulated; yellow	 <b>Item No.: 859-409/000-006</b> Jumper; for jumper slot; 9-way; insulated; blue
 <b>Item No.: 859-409</b> Jumper; for jumper slot; 9-way; insulated; light gray	 <b>Item No.: 859-409/000-005</b> Jumper; for jumper slot; 9-way; insulated; red	 <b>Item No.: 859-409/000-029</b> Jumper; for jumper slot; 9-way; insulated; yellow	

1.1.2 Marking

1.1.2.1 Marker

 <b>Item No.: 793-5501</b> WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white	 <b>Item No.: 793-502</b> WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white	 <b>Item No.: 793-566</b> WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white	 <b>Item No.: 793-503</b> WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white
 <b>Item No.: 793-504</b> WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white	 <b>Item No.: 793-505</b> WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white	 <b>Item No.: 793-506</b> WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white	 <b>Item No.: 793-501</b> WMB marking card; as card; not stretchable; plain; snap-on type; white
 <b>Item No.: 2009-115</b> WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white			

1.1.2.2 Marking strip

 <b>Item No.: 2009-110</b> Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white
---

### 1.1.3 Potential distribution

#### 1.1.3.1 Potential Distribution Module



**Item No.: 787-3861/000-1000**

Potential distribution module; 1 potential; with 8 clamping points 0V; Conductor cross-section up to 2.5 mm<sup>2</sup>



**Item No.: 787-3861/000-2000**

Potential distribution module; 1 potential; with 8 clamping points 24V; Conductor cross-section up to 2.5 mm<sup>2</sup>



**Item No.: 787-3861/000-3000**

Potential distribution module; 2 potentials; with 4 clamping points each (0V / 24V); Conductor cross-section up to 2.5 mm<sup>2</sup>

### 1.1.4 Tool

#### 1.1.4.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured