
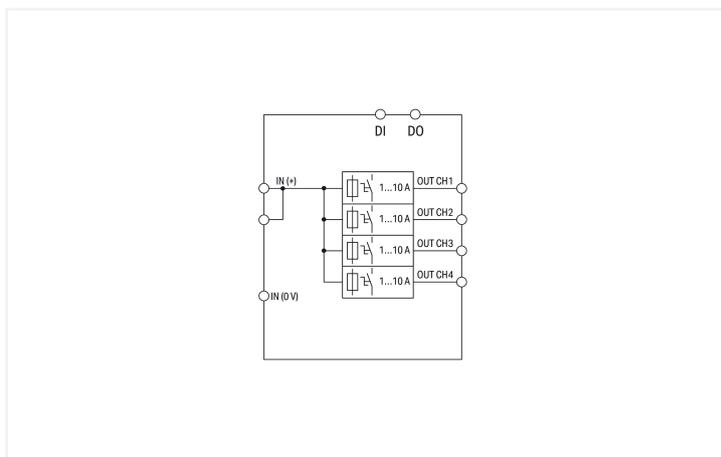
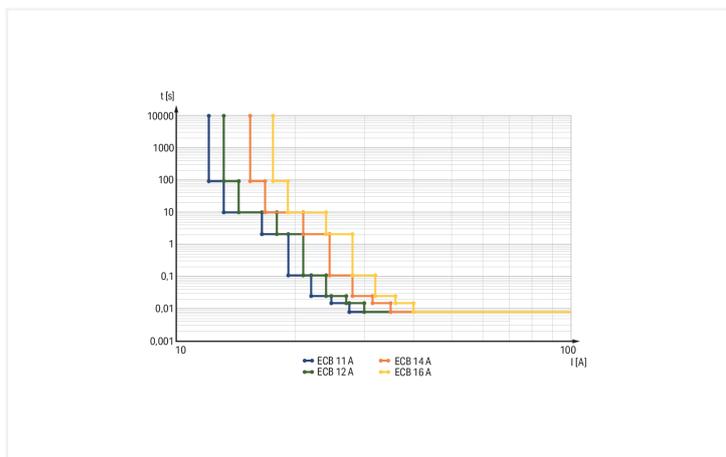


# Data Sheet | Item Number: 787-3664

Electronic circuit breaker; 4-channel; 24 VDC input voltage; adjustable 1 ... 10 A; Signal contact

<https://www.wago.com/787-3664>

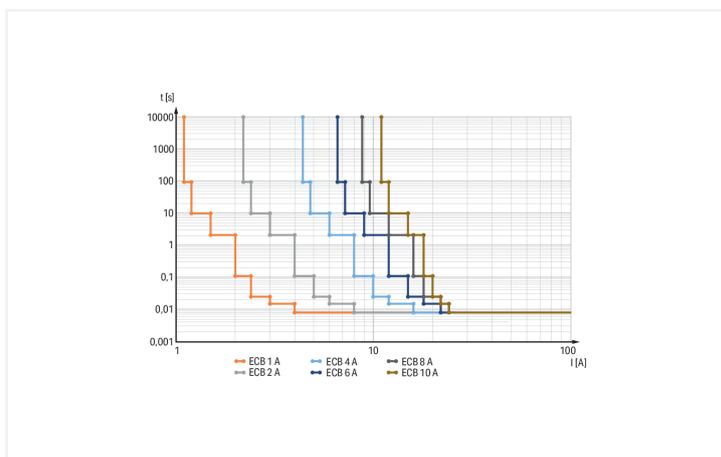

## Features:

- Space-saving ECB with four channels
- Nominal current: 1 ... 10 A (adjustable for each channel via selector switch)
- Switch-on capacity > 50,000  $\mu$ F per channel
- One illuminated, three-colored button per channel simplifies switching (on/off), resetting, and on-site diagnostics

- Time-delayed switching of channels
- Tripped message (group signal)
- Remote input resets or switches on/off tripped channels

## Technical data

### Input

Nominal input voltage $U_{i\text{nom}}$	24 VDC
Input voltage range	18 ... 30 VDC

### Output

Total number of channels (module)	4
Nominal output voltage $U_{o\text{nom}}$	4 x 24 VDC
Output voltage range	18 ... 30 VDC ( $U_e$ - voltage drop)
Voltage drop	≤ 250 mV (Input +)
Nominal output current $I_{o\text{nom}}$	4 x 1 / 2 / 4 / 6 / 8 / 10 A (adjustable for each channel via selector switch)
Default Setting	DC 1 A; switched off
Trip time	16 ms ... 100 s (load-dependent)
Switch-on capacity	
Switch-on behavior	Time-delayed channel switching (load-dependent, min. 50 ms / max. 10 s)
Active current limitation	No
Switch-on threshold	DC 20.3 V

## Signaling and Communication

Signaling	4 x LED (green/red/orange) 1 x Remote control input (S1) 1 x Active signal output (S2)
Operation status indicator	Green LED (channel OK) Red LED (tripped channel)
Remote input	Reactivation of all tripped channels via 15 ... 30 VDC pulse for min. 500 ms

## Efficiency/Power Losses

Power loss $P_i$	≤ 0.84 W; ≤ 10 W (4 x 10 A)
Efficiency (typ.)	98 %

## Circuit Protection

Internal fuse	T 12 A per channel
---------------	--------------------

## Safety and protection

Isolation voltage (connectors – housing)	0.5 kVDC
Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	No
Resistance to reverse feed	≤ 35 VDC
Pollution degree	2
Transient suppression (primary)	Suppressor diode (33 V)
Parallel operation of single channels	Permissible
Series operation	No

## Connection Data

### Connection 1

Connection type	Input (+)
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 831 Series
Solid conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Fine-stranded conductor	0.5 ... 10 mm <sup>2</sup> / 20 ... 8 AWG
Strip length	13 ... 15 mm / 0.51 ... 0.59 inches

### Connection 2

Connection type	Input (-); output; signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 231 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

### Physical data

Width	32 mm / 1.26 inches
Height	95 mm / 3.74 inches
Depth from upper-edge of DIN-rail	117.5 mm / 4.626 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	2.254 MJ
Weight	152.2 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	≥ 50 °C (see instruction manual)

### Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 UL 61010-2-201 UL 2367

### Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	IN
Customs tariff number	85362010900

### Product Classification

UNSPSC	39121634
ETIM 9.0	EC001440
ETIM 10.0	EC001440
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

CAS-No.	11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	770d0258-4fab-4b14-9c3b-8c07d2a2de62
SCIP notification number (Belgium)	808de5c5-bfd4-463b-a91a-1d79bdd2a549
SCIP notification number (Bulgaria)	fd5ee284-c087-4d01-b003-b36bc59328d9

**Environmental Product Compliance**

SCIP notification number (Czech Republic)	086b0409-eaf9-4fa5-9cfc-8fa3f2633649
SCIP notification number (Denmark)	ccd5ad61-d492-409c-838b-006109b18149
SCIP notification number (Finland)	03978a26-1fb5-4c30-ba89-22c9c9249c5a
SCIP notification number (France)	89cbabec-d00c-4dfc-9803-bb5c106334f0
SCIP notification number (Germany)	06760d83-7273-42a9-9ce9-07ddd1817cc1
SCIP notification number (Hungary)	01a51be0-50c4-48ef-8dd7-25d668e6ac5f
SCIP notification number (Italy)	a0f3a029-f535-4074-b652-0920bdb89b42
SCIP notification number (Netherlands)	7f04007f-93e7-47a7-8896-cb44a0762e97
SCIP notification number (Poland)	d9c6557a-34e9-431c-8ea4-73801fdf7ed0
SCIP notification number (Romania)	376f4cf4-edec-498d-9624-ae3494364574
SCIP notification number (Sweden)	68a94c82-e3c9-4324-87cb-112be317bd67

**Approvals / Certificates**

General approvals			Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	E175199	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 787-3664 <a href="#">↓</a>

**Documentation**

Manual			
Electronic circuit breaker	V 1.0.0 01.02.2024	pdf 5590.84 KB	<a href="#">↓</a>

Bid Text			
787-3664	14.04.2025	docx 36.30 KB	<a href="#">↓</a>
787-3664	14.04.2025	x81 7.27 KB	<a href="#">↓</a>

Instruction Leaflet			
Elektronischer Schutzschalter	V 1.0.0 10.10.2023	pdf 2402.31 KB	<a href="#">↓</a>

## CAD/CAE-Data

### CAD data

2D/3D Models  
787-3664



## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Tool

##### 1.1.1.1 Operating tool



[Item No.: 210-720](#)

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



[Item No.: 210-721](#)

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured



[Item No.: 210-769](#)

SCREWDRIVER; green