


# Concord

## MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ 2056414

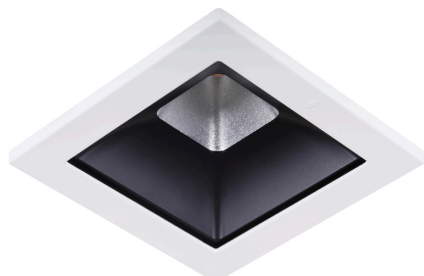

### Features

- MYRIAD SQUARE IP65 FLOOD 4000K DALI BLACK REFLECTOR WHITE BEZEL


### Product Overview

Product name	MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Fixture luminous flux (lm)	1142
Luminaire efficacy (lm/W)	114
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	Aluminium
IP rating	IP65/20
IK rating	IK02
Product EAN number	5025768564149
Warranty	5 years


# Concord

MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ  
2056414

## Photometry

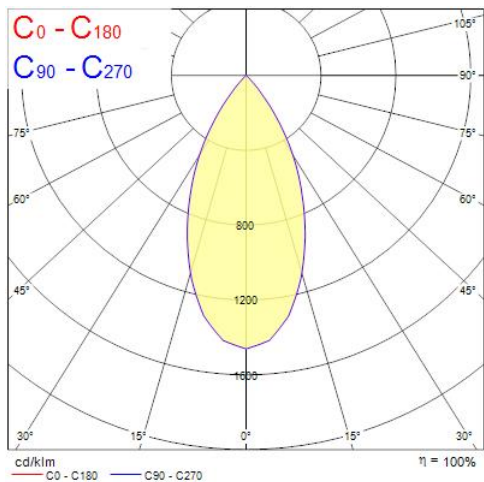

## Technical drawings

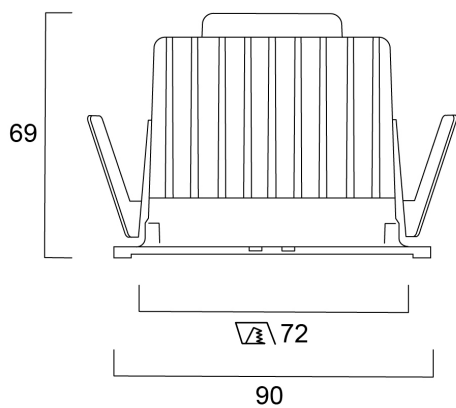

## Data table

### GENERAL DATA

# Concord

## MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ 2056414

<b>Product name</b>	MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Aluminium
<b>Mount</b>	Ceiling recessed mounting
<b>Environment</b>	Interior
<b>Performance ambient temperature Tq (°C)</b>	25
<b>Warranty</b>	5 years

### OPTICAL DATA

<b>Fixture luminous flux (lm)</b>	1142
<b>Luminaire efficacy (lm/W)</b>	114
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	90
<b>Colour Variation Initial (SDCM)</b>	3
<b>Adjustable chromaticity</b>	N
<b>Photobiological Risk Group</b>	RG1

### ELECTRICAL DATA

<b>Total power consumption (W)</b>	10
<b>Electrical protection</b>	Class II
<b>Control gear required</b>	No
<b>Drive current (mA)</b>	250
<b>Energy Efficiency Class (A-&gt;G) of contained light source</b>	E
<b>Nominal Frequency (Hz)</b>	50/60Hz

### LIFETIME DATA

<b>Lifespan L70 B50</b>	100000
<b>Lifespan L80 B20</b>	100000

# Concord

## MYRIAD SQUARE IP65 FLOOD 4K DALI BLKREF WBEZ 2056414

Lifespan L90 B10	68500
------------------	-------

### PHYSICAL DATA

Housing colour	Aluminium
IP rating	IP65/20
IK rating	IK02
Nominal Product Width (mm)	72
Weight (kg)	0.39
Recessed Depth (mm)	64

### PACKAGING

Single packaging type	Carton
Product EAN number	5025768564149
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768564149
Packaging outer length / height (cm)	17.5

### SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No