




The most complete system of containers for lightweight and plasterboard walls; GEWISS patented solutions. Made with halogen-free technopolymer and GWT 850°C. The range include: enclosures and distribution boards up to 72 M; 48 PT DIN GREENWALL range junction boxes with integrated DIN rail on the back plate, compliant with CEI 23-49, ideal for the pre-arrangement and installation of domotic devices; boxes for wiring devices and boxes for interlocked switched socket-outlets.

Aant. modules	4	IP-graad	IP40
Type	Voor gipsplaat muren	Gloeidraadtest	850 °C
Categorie	Voor huishoudelijke serie	Thermodruk met kogel	70 °C
In overeenstemming met normen	EN 60670-1 (CEI 23-48)	Buitenste afm. LxHxD (mm)	133 x 73 x 50
Materiaal	GW PLAST Technopolymer	Bevestigingssteunen asafstand	108.5 mm
Halogeen vrij	Halogeen vrij conform EN 60754-2	Cable entries	2 x Ø 16 + 6 x Ø 20 + 2 x Ø 25/32 cut-outs
Kleur	Groen	Type of cut-outs	Verwijderbaar met gereedschap
Installatie temperatuur	-15 +60 °C		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

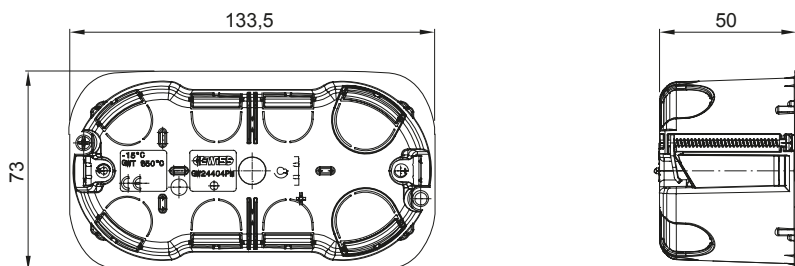

TECHNICAL SYMBOLOGY

GWT

850 °C



70 °C

HF

Halogeen vrij conform
EN 60754-2

STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 11/03/2026

Data, measures, designs and pictures are shown
only as informative purposes,
and could be changed without previous notice