



Features

- Pendant luminaire with remote driver, wire to base with pluggable connection for easy installation, suitable for looping, switchable driver, white coloured aluminium housing, 1,617lm, 16W, 101lm/W, 4000K, 350mA , CRI:80, 40° beam Angle, non-dimmable, IP20, IK07, lifespan: 60,000hrs (L80:B20), 18.50x24.5x11.5mm.


Product Overview

Product name	Inverto Pend Rmt NW Eb White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
ETIM Class	EC001743
Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	16
Electrical protection	Class II


Inverto Pend Rmt NW Eb White 3080062

Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	8711971800620
Warranty	5 years
Dimming method	N/A

Photometry

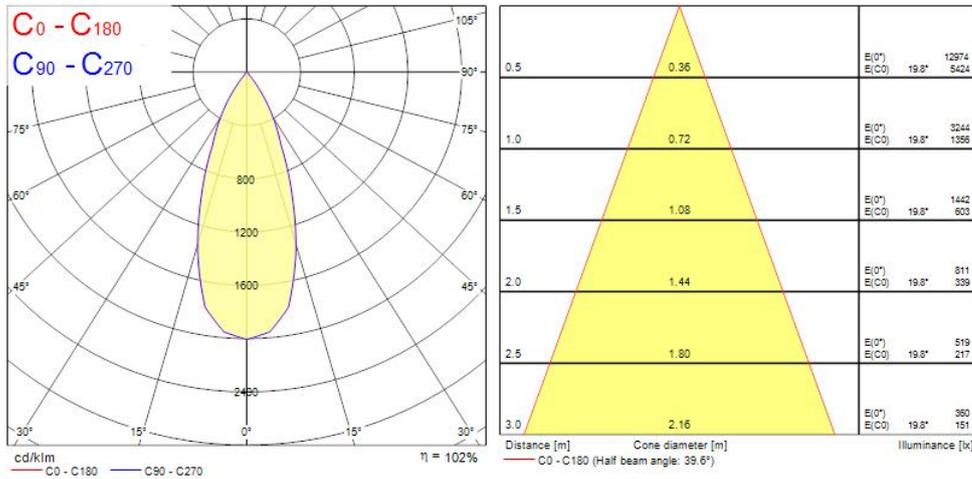

Technical drawings

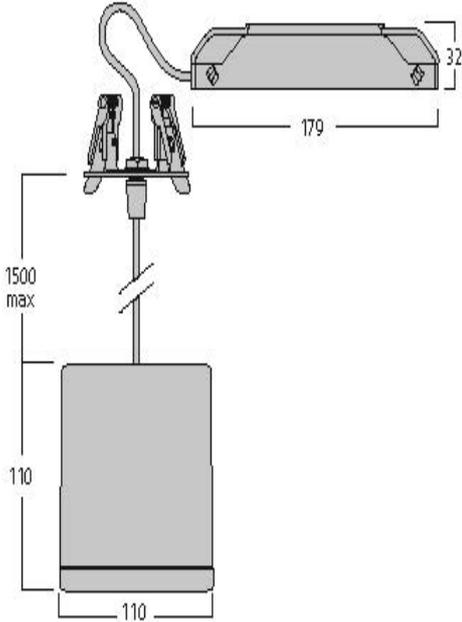

Data table

GENERAL DATA

Product name	Inverto Pend Rmt NW Eb White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Pendant surface
Environment	Internal
General application	Hospitality
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

Inverto Pend Rmt NW Eb White 3080062

OPTICAL DATA

Fixture luminous flux (lm)	1617
Luminaire efficacy (lm/W)	101
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	40
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	16
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	80

LIFETIME DATA

Lifespan L70 B50	60000
Lifespan L80 B20	60000

Inverto Pend Rmt NW Eb White 3080062

Lifespan L90 B10	56100
------------------	-------

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	110
Nominal Product Width (mm)	110
Nominal Product Height (mm)	110
Weight (kg)	1.429

PACKAGING

Product EAN number	8711971800620
Packaging single length / height (cm)	18.5
Packaging single width (cm)	29.6
Packaging single depth (cm)	11.5
DUN14 (inner)	08711971800620
Units per outer package	1
Packaging outer length / height (cm)	18.5
Packaging outer width (cm)	29.6
Packaging outer depth (cm)	11.5

SAFETY DATA

Optimal operating condition (°C)	-25-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No