


Data Sheet | Item Number: 894-8392/073-306

pre-assembled interconnecting cable; Cca; Socket/plug; 2-pole; Cod. E; Y-H(St)Hh
1x2x0,8; 3 m; green

<https://www.wago.com/894-8392/073-306>



Color: ■ green

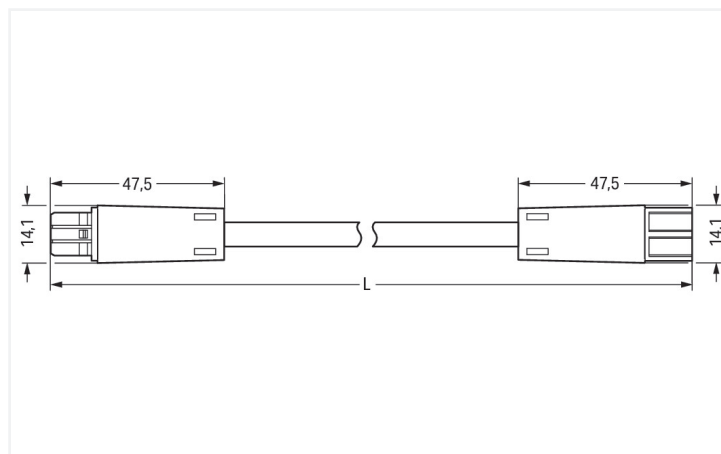

Dimensions in mm

Cable assembly *WINSTA*® KNX with protection against mismatching

Use effective pluggable connections instead of laborious screw connections: With the *WINSTA*® KNX cable assembly rated current 3 A. The pluggable installation connectors with spring pressure connection technology work completely without screw connections. They allow resource-efficient, error-free installation in numerous possible uses. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). The KNX standard is the ultimate benchmark in automation of buildings. It ensures error-free, manufacturer-independent networking of state-of-the-art building systems. The standardised *WINSTA*® KNX pluggable installation connectors in green are employed for signal transfer in KNX networks. Anyone who needs to worry about technical safety requirements related to fire protection for electrical installation should use only top quality components. Our product satisfies the official safety standards of fire class C. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also increases the fire class, since halogen-free materials are flame-resistant.

Pluggable connections instead of screw connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a plug. The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also lower installation expenses without compromising quality and safety: with protection type IP20 reduces the need for servicing and prevents unnecessary downtime.

- products perfectly tailored to your requirements guarantee safe use
- with E coding for AC and DC applications
- exact dimensions
- convenient installation and commissioning

Notes

Note

Cables with a different fire class can be found in the eShop.

Electrical data

Ratings per	IEC/EN 60664-1			General information	
Overvoltage category	III	III	II	Note on contact resistance	Approx. 3 mΩ contact resistance
Pollution degree	3	2	2		
Nominal voltage	50 V	-	-		
Rated impulse withstand voltage	0.8 kV	-	-		
Rated current	3 A	-	-		

Connection Data

Total number of potentials	2	Connection 1	
		Conductor diameter	0.8 mm
		Pole number	2
		Connection type	Socket - Plug

Physical data

Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	3 m

Mechanical data

Technology	KNX
Coding	E
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - Plug
Type of pre-assembled cable	Interconnecting cable
Cable type	Y-H(St)Hh 1x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: <ul style="list-style-type: none"> a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data

Note (material data)	Information on material specifications can be found here
Color	green
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire class per EN 50575	C _{ca}
Contact material	Copper alloy; surface-treated
Contact Plating	Tin
Fire load	0 MJ
Connector color	green
Strain relief color	black
Sheathed cable color	green
Printing color of sheathed cable	black
Halogen-free	Yes
Silicon-free	Yes
Sheath material	Halogen-free
Rubber cable	No
Weight	110 g
Copper weight of the raw cable	0.01 kg/m

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143946209
Customs tariff number	85444290900

Product Classification

UNSPSC	26121630
ETIM 9.0	EC002587
ETIM 10.0	EC002587
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
894-8392/073-306

