

Concord

BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747



Features

- Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, DALI dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit DALI track adaptor, suitable for Concord Lytespan 3+DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

Product Overview



Product name	BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4280895
Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White

Concord

BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747

CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597475
Warranty	5 years
Dimming method	DALI

Photometry

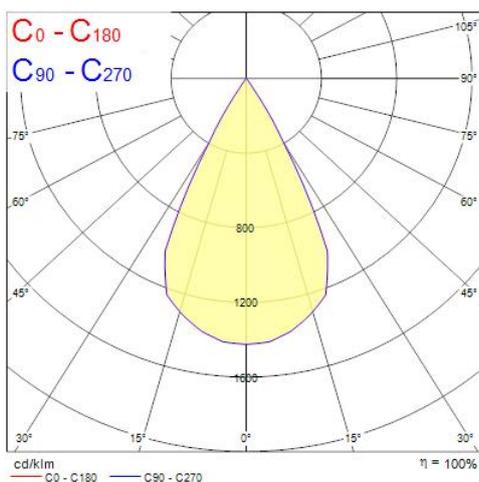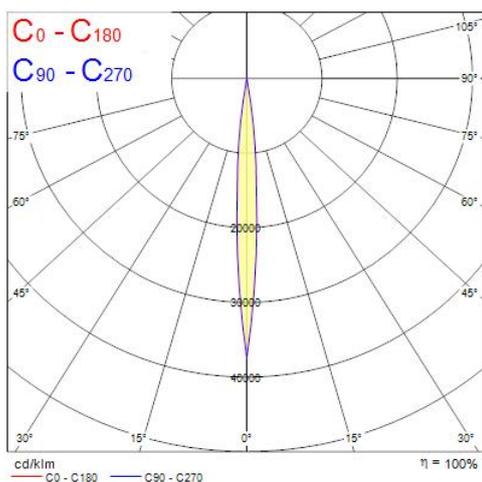


0.5	0.52	E(0°) E(C0)	27.4°	6160 2182
1.0	1.04	E(0°) E(C0)	27.4°	1540 545
1.5	1.56	E(0°) E(C0)	27.4°	684 242
2.0	2.07	E(0°) E(C0)	27.4°	385 136
2.5	2.59	E(0°) E(C0)	27.4°	246 87
3.0	3.11	E(0°) E(C0)	27.4°	171 61


Distance [m] Cone diameter [m] Illuminance [lx]
 C₀ - C₁₈₀ (Half beam angle: 54.8°)

Concord

BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747

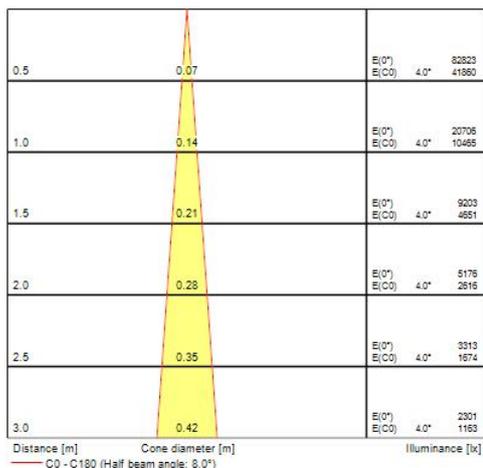

Technical drawings

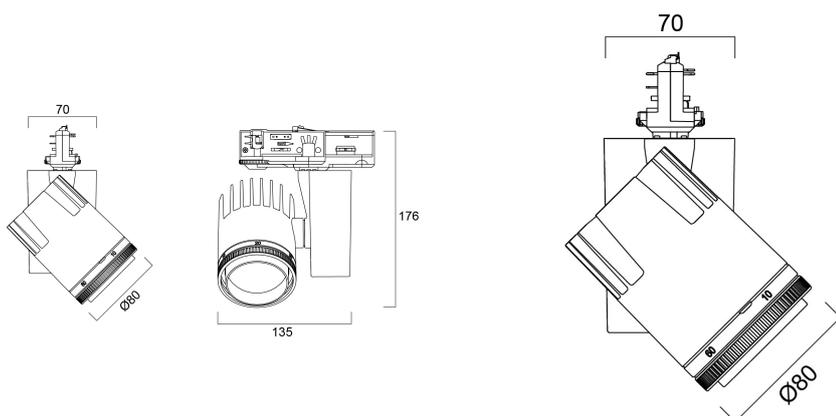

Data table

GENERAL DATA

Product name	BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE
Technology	LED
Cap/Base	N/A

Concord

BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747

Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280895
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz

Concord

BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747

Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	80

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	47500

PHYSICAL DATA

Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	135
Nominal Product Height (mm)	176
Nominal Product Diameter (mm)	80
Weight (kg)	0.95

PACKAGING

Product EAN number	5025768597475
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768597475
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No