

Start Flood Flat IP65 4650LM 830 White 0050119



Features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. White (RAL9003) housing, white reflector, 4650 lm, 45 W, 103 lm/W, 3000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 151 x 190 x 30 mm (L x W x H). Weight: 0.74kg.


Product Overview

Product name	Start Flood Flat IP65 4650LM 830 White
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579549
Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	103
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	45
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	White


Start Flood Flat IP65 4650LM 830 White 0050119

IP rating	IP65
IK rating	IK06
Product EAN number	5410288501192
Warranty	3 years
Dimming method	N/A

Photometry

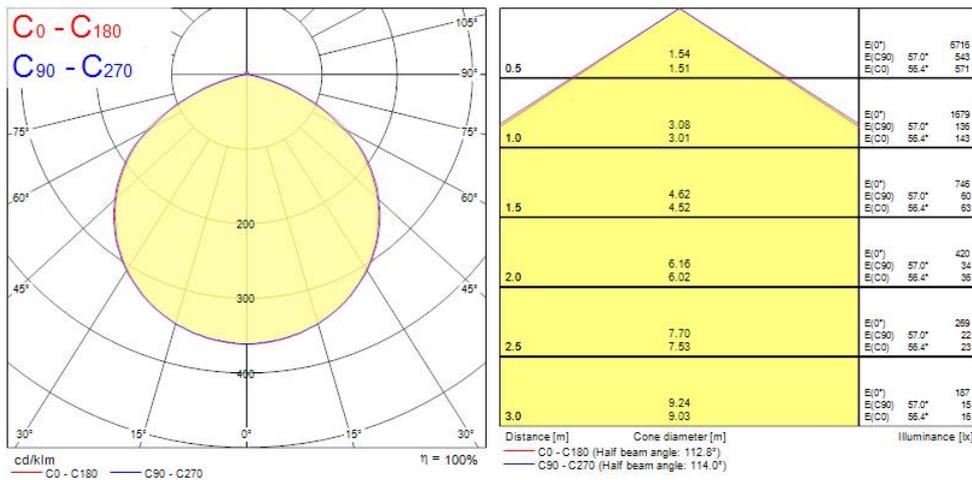

Technical drawings

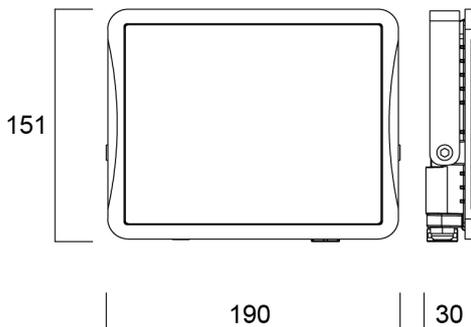

Start Flood Flat IP65 4650LM 830 White 0050119

Data table

GENERAL DATA

Product name	Start Flood Flat IP65 4650LM 830 White
Technology	LED
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001744
E-number FI	4579549
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	4650
Luminaire efficacy (lm/W)	103
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	110
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	45
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	154
Inrush Current (A)	19.2
Inrush Duration (µs)	420

Start Flood Flat IP65 4650LM 830 White 0050119

Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	16
Max. products per 13A C Breaker	21
Max. products per 16A C Breaker	26
Max. products per 20A C Breaker	32
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	15
Max. products per 20A B Breaker	19

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B50	90000
Lifespan L80 B20	58000

PHYSICAL DATA

Housing colour	White
IP rating	IP65
IK rating	IK06
Nominal Product Length (mm)	151
Nominal Product Width (mm)	190
Nominal Product Height (mm)	30
Weight (kg)	0.74

PACKAGING

Product EAN number	5410288501192
Packaging single length / height (cm)	20.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	18.0
DUN14 (inner)	15410288501199
Units per outer package	6

Start Flood Flat IP65 4650LM 830 White 0050119

Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	20.2
Packaging outer depth (cm)	20.0

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No