


MYRIAD HOUSING 2700K DALI

Item No: 2057922


Concord

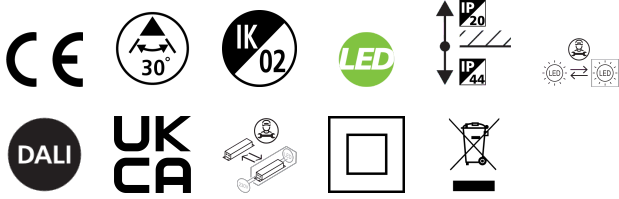

MYRIAD HOUSING 2700K DALI

Technical Assets

Dimensions (mm)

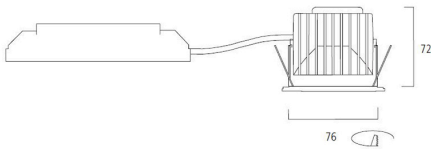


Dimensions (mm)

Photometrics

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]	E(C180) [lx]
0.5	0.33	5141	1285	205	51
1.0	0.67	1285	321	51	13
1.5	1.00	514	128	20	5
2.0	1.34	257	64	10	2.5
2.5	1.67	171	32	5	1.3
3.0	2.01	103	16	2.5	0.7

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 37.0°)

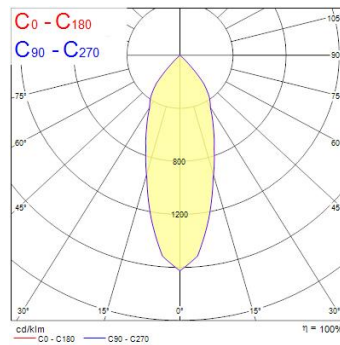

MYRIAD HOUSING 2700K DALI

Item No: 2057922

Concord

General data

Product name	MYRIAD HOUSING 2700K DALI
Technology	LED
Cap/Base	N/A
Environment	Interior
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years

Optical data

Useful luminous flux (Φ_{use})	791
Fixture luminous flux (lm)	791
Luminous flux (lm)	791
Luminaire efficacy (lm/W)	79
LOR (%)	100
Correlated colour temperature (k)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Dimming method	DALI
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

Physical data

IP rating	IP44/20
IK rating	IK02
Weight (kg)	0.37
Recessed Depth (mm)	72

Packaging

Product EAN number	5025768579228
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05025768579228
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5