

Features

- In saver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (LCA 25W 350–1050mA one4all SR PRE 28000671), 20W; 2350lm; 118lm/W; 3000K; UGR <19 with shallow product depth 65mm.


Product Overview

Product name	INSV U19 IP54 200 2350 830 DALI SQ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current


INSV U19 IP54 200 2350 830 DALI SQ 0030542

Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288305424
Warranty	5 years
Dimming method	DALI-2, Switch-dim (mains-rated)
Colour Code	830

Photometry

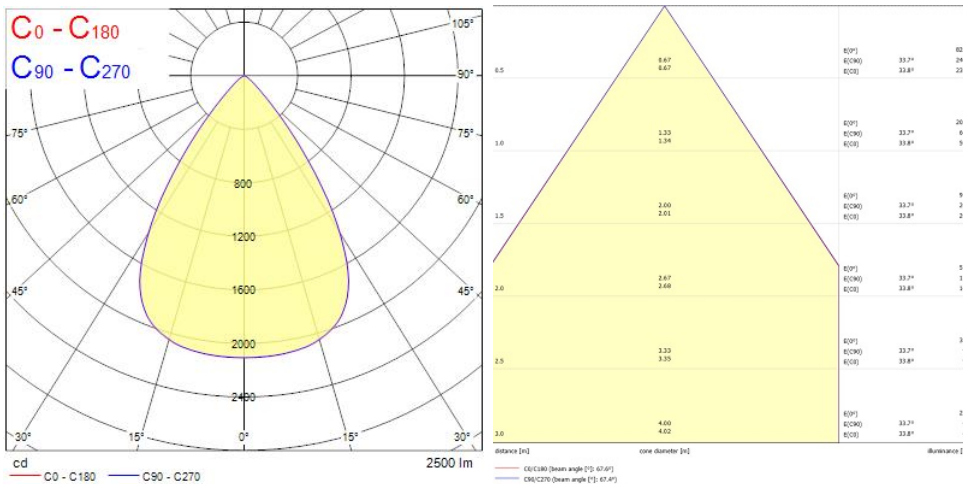

Technical drawings

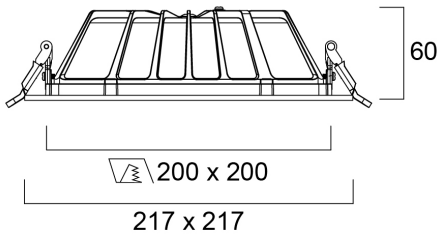

Data table

GENERAL DATA

Product name	INSV U19 IP54 200 2350 830 DALI SQ
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2350
Luminaire efficacy (lm/W)	118
Correlated colour temperature (k)	3000

INSV U19 IP54 200 2350 830 DALI SQ 0030542

Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	70
Beam Angle (°)	NA
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	20
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.94
THD (at 230 V, 50 Hz, full load, at 100% dimming level) < xx.x %	7
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	600
Inrush Current (A)	25
Inrush Duration (µs)	141
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	40
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	19

INSV U19 IP54 200 2350 830 DALI SQ 0030542

Max. products per 13A B Breaker	24
Max. products per 16A B Breaker	31
Max. products per 20A B Breaker	40
Connectable conductor cross section - Min (mm ²)	0.5
Connectable conductor cross section - Max (mm ²)	2.5

PHYSICAL DATA

Housing colour	RAL9010
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Length (mm)	217
Nominal Product Width (mm)	217
Nominal Product Height (mm)	60
Weight (kg)	0.8
Recessed Depth (mm)	150

PACKAGING

Product EAN number	5410288305424
Packaging single length / height (cm)	25.0
Packaging single width (cm)	25.0
Packaging single depth (cm)	8.0
DUN14 (inner)	15410288305421
Units per outer package	12
Packaging outer length / height (cm)	51.5
Packaging outer width (cm)	51.5
Packaging outer depth (cm)	26.0

SAFETY DATA

Glow Wire Test (°C)	850
---------------------	-----

INSV U19 IP54 200 2350 830 DALI SQ

0030542

Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No