

Features

• Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack UGR19 lenses, light beam angle:68° Textured black finishing colour. Light color temperature: 3000K, warm white, Total system power: 10.6W, Fixture lumen output: 825lm, efficacy: 78lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, non-dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. COMPATIBLE WITH OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.585mmx32mmx75mm


Product Overview

Product name	RAXA UGR19 600 CRI95 3000K BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	825
Luminaire efficacy (lm/W)	78
Correlated colour temperature (k)	3000
Light colour	Warm White

RAXA UGR19 600 CRI95 3000K BLACK 2016443

CRI (Ra)	95
Colour Variation Initial (SDCM)	3
Beam Angle (°)	68
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	10.6
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768164431
Warranty	5 years
Dimming method	N/A

Photometry

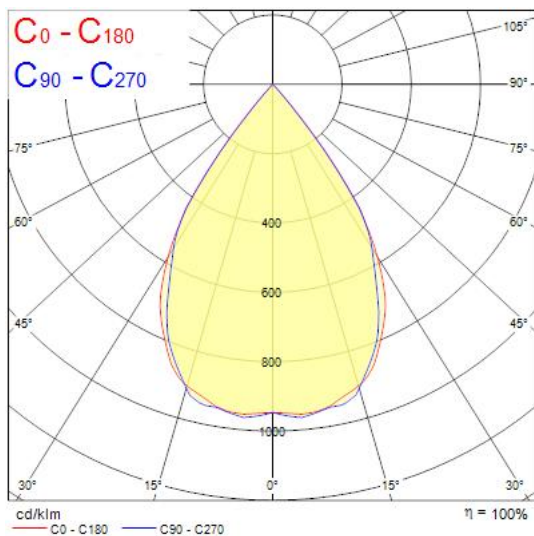

Technical drawings

