


Data Sheet | Item Number: 2706-161

PCB terminal block; lever; 6 mm²; Pin spacing 7.5 mm; 11-pole; CAGE CLAMP®; commoning option; gray



<https://www.wago.com/2706-161>

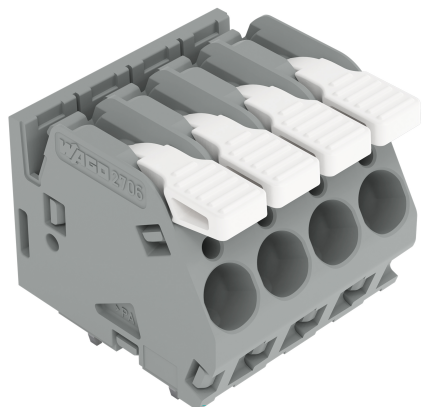

Color: ■ gray

Similar to illustration

Current-Carrying Capacity Curve
Pin spacing: 7.5 mm / Conductor cross-section: 6 mm² "f-st"
Based on: EN 60512-5-2 / Reduction factor: 1

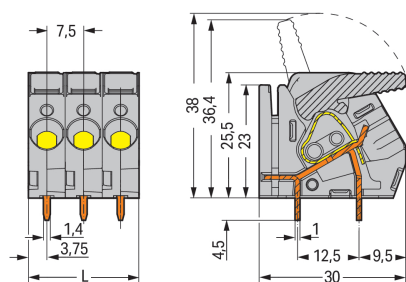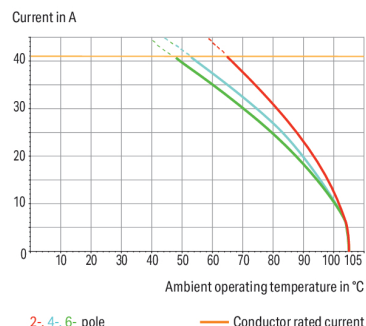

Dimensions in mm

L = pole no. x pin spacing

PCB terminal block, 2706 Series, solder pin dimensions 1 x 1.4 mm

This PCB terminal block (item number 2706-161) is designed for quick and simple connections. It is a universal connector that can be used almost anywhere, for example, as a pluggable PCB connector, panel feedthrough header, connector for rail-mount terminal blocks, or a floating connector for different mounting methods. Strip lengths must be between 11 and 12 mm when connecting conductors to this PCB terminal block. This product features one conductor terminal and utilizes CAGE CLAMP®. Our reliable and maintenance-free CAGE CLAMP® connection makes it easy to connect all types of conductors without having to prepare the conductor. For example, you don't need to crimp ferrules. Dimensions: (82.5 x 30 x 30) mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.5 mm² to 6 mm².

The contact surface is coated with tin. A lever is used to operate this PCB terminal block. THT is used to solder the PCB terminal block. Insert the conductor into the board at a 30° angle..



Notes	
Safety Information	Using adjacent jumpers, the rated voltage is reduced to 400 V with 7.5 mm pin spacing in Category III/3.
Variants:	Other pole numbers Other colors Mixed-color PCB connector strips Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data						
Ratings per		IEC/EN 60664-1			Approvals per	
		UL 1059				
Overvoltage category	III	III	II		Use group	B
Pollution degree	3	2	2		Rated voltage	300 V
Nominal voltage	500 V	630 V	1000 V		Rated current	30 A
Rated impulse withstand voltage	6 kV	6 kV	6 kV			
Rated current	41 A	41 A	41 A			

Connection Data			
Clamping units	11	Connection 1	
Total number of potentials	11	Connection technology	CAGE CLAMP®
Number of connection types	1	Actuation type	Lever
Number of levels	1	Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG
Number of jumper slots	1	Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm²
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 6 mm²
		Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
		Conductor connection direction to PCB	30 °
		Pole number	11

Physical data	
Pin spacing	7.5 mm / 0.295 inches
Width	82.5 mm / 3.248 inches
Height	30 mm / 1.181 inches
Height from the surface	25.5 mm / 1.004 inches
Depth	30 mm / 1.181 inches
Solder pin length	4.5 mm
Solder pin dimensions	1 x 1.4 mm
!	1.8 (+0.1) mm

PCB contact	
PCB contact	THT
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2



Material data		
Note (material data)	Information on material specifications can be found here	
Color	gray	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E _{CU})	
Contact Plating	Tin	
Fire load	1.275 MJ	
Weight	63.3 g	

Environmental requirements		
Limit temperature range	-60 ... +105 °C	

Commercial data		
Product Group	4 (Printed Circuit Connectors)	
PU (SPU)	15 pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4050821093206	
Customs tariff number	85369010000	

Product Classification		
UNSPSC	39121409	
eCl@ss 10.0	27-44-04-01	
eCl@ss 9.0	27-44-04-01	
ETIM 9.0	EC002643	
ETIM 10.0	EC002643	
ECCN	NO US CLASSIFICATION	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
   			Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	2143801.01	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 60947-7-4	NTR NL-7869	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 60947-7-4	71-117469			
CSA DEKRA Certification B.V.	C22.2 No. 158	2516072			
UL UL International Germany GmbH	UL 1059	E45172			



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 2706-161			

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 2706-161	

CAE data	
ZUKEN Portal 2706-161	

PCB Design	
Symbol and Footprint via SamacSys 2706-161	
Symbol and Footprint via Ultra Librarian 2706-161	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

			
Item No.: 216-262 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	Item No.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	Item No.: 216-264 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	Item No.: 216-284 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black
			
Item No.: 216-266 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	Item No.: 216-286 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	Item No.: 216-267 Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	Item No.: 216-287 Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray
			
Item No.: 216-208 Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow	Item No.: 216-288 Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow	Item No.: 216-108 Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated; silver-colored	

1.1.2 Jumper

1.1.2.1 Jumper



Item No.: 745-380
Jumper; 10-way; unplated; silver-colored



Item No.: 745-381
Jumper; 2-way; unplated; silver-colored



Item No.: 745-382
Jumper; 2-way; unplated; silver-colored



Item No.: 745-383
Jumper; 3-way; silver-colored



Item No.: 745-384
Jumper; 4-way; unplated; silver-colored



Item No.: 745-385
Jumper; 5-way; unplated; silver-colored

1.1.3 Test and measurement


1.1.3.1 Testing accessories




Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red

Installation Notes

Conductor termination




To open the clamping unit, pull the operating lever all the way back — 2706 and 2716 Series.




Inserting/removing a conductor – 2706 and 2716 Series.

Testing




Testing with test plug – 2706 and 2716 Series.


Commoning



Inserting a comb-style jumper bar.



Push jumper bar down firmly using a screwdriver until it hits the backstop – 2706 and 2716 Series.



To remove the comb-style jumper bar, lift it up using a screwdriver – 2706 and 2716 Series.