

## Start Flood IP66 Asymmetric

Start Flood IP66 42000lm 740 ASYM  
0048215



### PRODUCT OVERVIEW

Product name	Start Flood IP66 42000lm 740 ASYM
Technology	LED
E-number FI	4579467
Warranty	5 years
Fixture luminous flux (lm)	41000
Luminaire efficacy (lm/W)	137
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Beam Angle (°)	65*120
Photobiological Risk Group	RG1
Total power consumption (W)	300
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288482156

### DATA TABLE

#### General data

Product name	Start Flood IP66 42000lm 740 ASYM
Technology	LED
Operating temperature range (°C)	-30°C...+50°C
Performance ambient temperature Tq (°C)	25
E-number FI	4579467
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	41000
Luminaire efficacy (lm/W)	137
Colour temperature (K)	4000
Light colour	Neutral White

## Start Flood IP66 Asymmetric

*Start Flood IP66 42000lm 740 ASYM*  
0048215

CRI (Ra)	70
Beam Angle (°)	65*120
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	300
Lamp power factor	0.97
Electrical protection	Class I
Drive current (mA)	5650
Inrush Current (A)	80
Inrush Duration (µs)	650
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	2
Max. products per 20A B Breaker	3
Mains surge immunity (differential mode - > L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	100000

### Physical data

IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	567
Nominal Product Width (mm)	465
Weight (kg)	9.6

### Packaging


Single packaging type	Carton
Product EAN number	5410288482156
Packaging single width (cm)	16.0
Packaging single depth (cm)	51.0
DUN14 (outer)	05410288482156
Packaging outer length / height (cm)	66.0

### Safety data

Optimal operating condition (°C)	-30-50
----------------------------------	--------

## PHOTOMETRY

## Start Flood IP66 Asymmetric *Start Flood IP66 42000lm 740 ASYM* 0048215

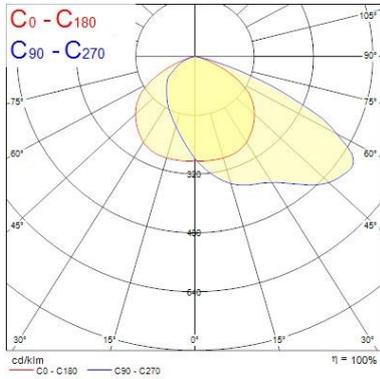

### TECHNICAL DRAWINGS

