

# Concord

## OPTIX SURFACE 1500 MPO D/I 4000K SSC

2021700



### Features

- OPTIX SURFACE 1500 MPO D/I 4000K SSC is a high efficacy low glare suspended LED Linear luminaire with Micro Prismatic diffuser, with direct/indirect light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, Sylsmart Standalone capable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 6650lm luminous flux, 65/35 D/I light distribution ratio, 50W power consumption, 133lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m<sup>2</sup>, lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.

### Product Overview

Product name	OPTIX SURFACE 1500 MPO D/I 4000K SSC
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	6650
Luminous flux (lm)	6650
Luminaire efficacy (lm/W)	133
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19

Concord  
by SYLVANIA


# Concord

OPTIX SURFACE 1500 MPO D/I 4000K SSC

2021700

Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768217007
Warranty	5 years
Dimming method	SylSmart SSC

## Photometry

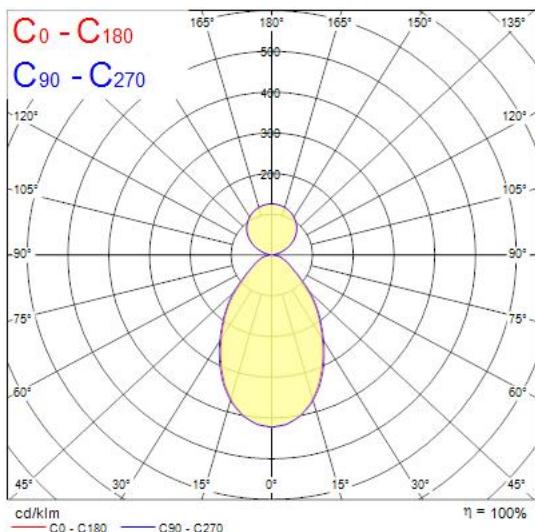

## Technical drawings

