

# PJ31 'J' Type feeder pillar fuse link



## Product description

Eaton's Bussmann® series PJ31 'J' Type feeder pillar fuse links are designed to be used with wedge type fuse carriers on BS applications. These fuse links will be used by Electrical Authorities in distribution pillars, open type substation boards, heavy duty cut-outs and underground connection boxes. They can also be fitted in pole or wall mounted outdoor service fuse links.

## Features

- BS88-2
- gU Characteristics
- Ideal for Utility applications
- Excellent cable protection

Catalogue symbol:

- 355PJ31-7
- 400PJ31-7

Technical data:

- Rated voltage: 415 V a.c.
- Rated current: 355 and 400 A
- Breaking capacity: 80 kA a.c.
- Breaking range and utilisation category: gU

Standards/approvals:

- ASTA certified
- Tested to BS88-2 Fuse system I (previously known as BS88-5)


Packaging:

- MOQ: 10


Table 1. Technical data

| Part number | Rated voltage | Rated current (Amps) | Energy integrals I²t (A²S) |                |                | Watts loss W | Product Class |
|-------------|---------------|----------------------|----------------------------|----------------|----------------|--------------|---------------|
|             |               |                      | Pre-arcing                 | Total at 240 V | Total at 415 V |              |               |
| 355PJ31-7   | 415 V a.c.    | 355                  | 360,000                    | 610,000        | 865,000        | 26           | gU            |
| 400PJ31-7   | 415 V a.c.    | 400                  | 475,000                    | 810,000        | 1,150,000      | 31           | gU            |

Dimensions - mm

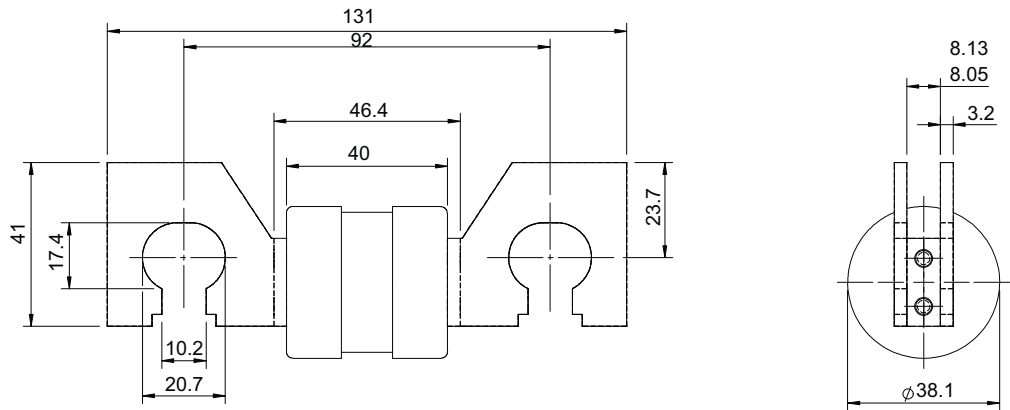

Time current curve

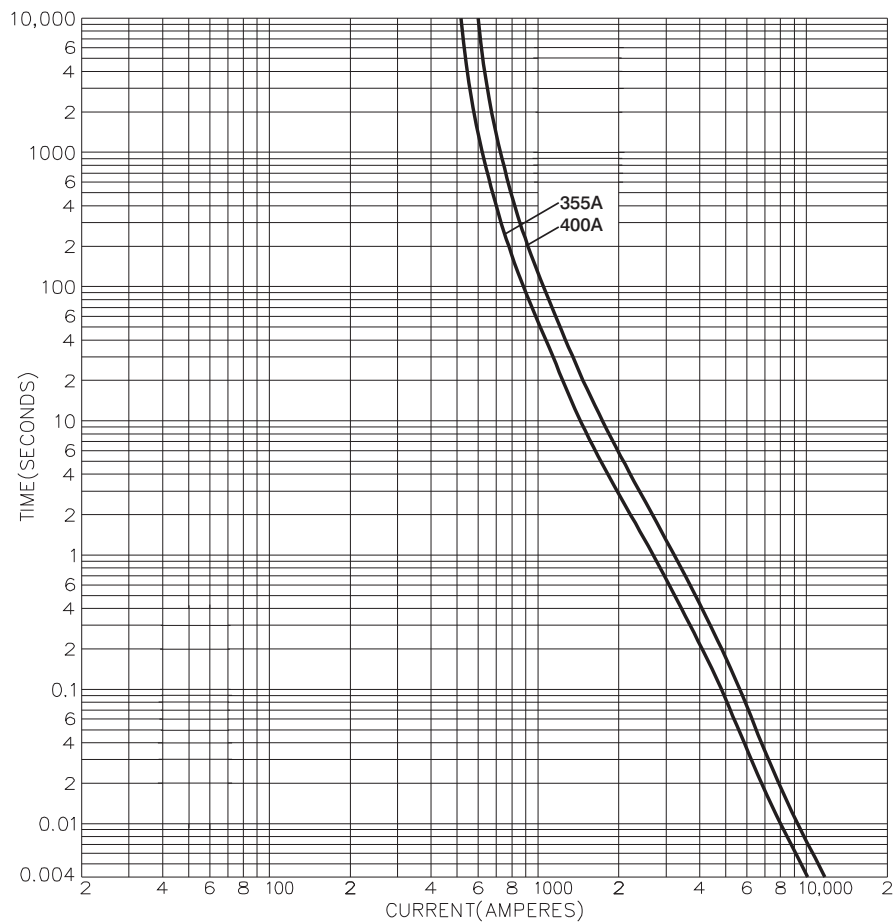

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

**Eaton**  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland

Eaton Electrical Products Limited  
Melton Road  
Burton-on-the-Wolds  
Leicestershire, LE12 5TH  
United Kingdom

© 2017 Eaton  
All Rights Reserved  
PDF Only  
Publication No. 4181  
October 2017