

Concord

OPTIX SURFACE 1500 MPO D/I 4000K

2021696



Features

- OPTIX SURFACE 1500 MPO D/I 4000K is a high efficacy low glare suspended LED Linear luminaire with Micro Prismatic diffuser, with direct/indirect light distribution, luminaire dimensions: 1500x200x50mm, Sylvania White body colour (RAL9016), IP20, IK07, Constant Current driver, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 6650lm luminous flux, 65/35 D/I light distribution ratio, 49W power consumption, 136lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m², lumen maintenance: L90B50 at 71000h, photobiological safety risk group 1. Electrical protection Class I.

Product Overview

Product name	OPTIX SURFACE 1500 MPO D/I 4000K
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Suspended
General application	Education, Office
ETIM Class	EC002892
Fixture luminous flux (lm)	6650
Luminous flux (lm)	6650
Luminaire efficacy (lm/W)	136
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1

Concord
by SYLVANIA


Concord

OPTIX SURFACE 1500 MPO D/I 4000K

2021696

Total power consumption (W)	49
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5025768216963
Warranty	5 years
Dimming method	N/A

Photometry

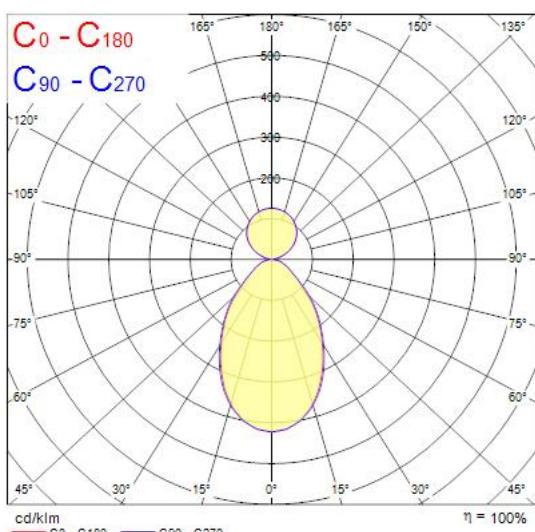

Technical drawings

