


Beacon LED

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
2059617



Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1512lm, luminaire efficacy: 72lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

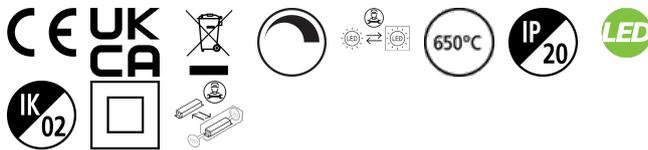


PRODUCT OVERVIEW

Product name	BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	1512
Fixture luminous flux (lm)	1512
Luminaire efficacy (lm/W)	72
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	12
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: trailing edge only
Minimum dimming level (%)	3
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596171

Beacon LED

BEACON 93CRI 3K NARROW BEAM L3 TRAILING EDGE WHITE
2059617

PHOTOMETRY

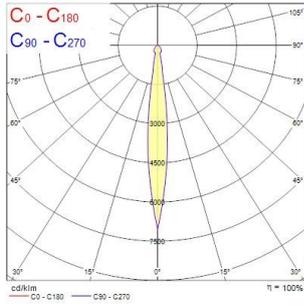

0.5	0.11	507 E(CD)	6.0°	2880 1125
1.0	0.21	507 E(CD)	6.0°	1084 821
1.5	0.32	507 E(CD)	6.0°	470 295
2.0	0.42	507 E(CD)	6.0°	266 122
2.5	0.53	507 E(CD)	6.0°	178 98
3.0	0.63	507 E(CD)	6.0°	135 89

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 12.0°)

TECHNICAL DRAWINGS

