


Color: ■ gray/gray

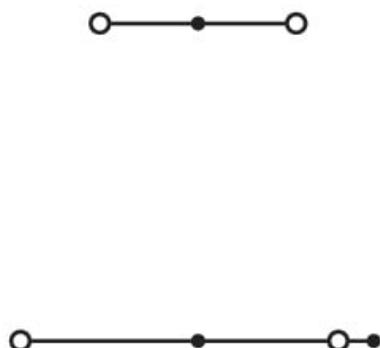

Similar to illustration

## Double-deck terminal block, 280 Series, operating tool

Our double-deck terminal block (item number 280-543) is designed for seamless electrical installations. The double-deck terminal block also serves as a through terminal block. Strip lengths must be between 8 mm and 9 mm when connecting conductors to this double-deck terminal block. This product features conductor terminals and utilizes CAGE CLAMP<sup>®</sup>. Our CAGE CLAMP<sup>®</sup> connection provides a dependable and maintenance-free way to connect all types of conductors. You do not need to prepare the conductor in any way, such as crimping ferrules. This double-deck terminal block is suitable for conductor cross sections ranging from 0.08 mm<sup>2</sup> to 2.5 mm<sup>2</sup>. It has two levels. Two potentials can connect using the four clamping points. The gray housing is made of polyamide (PA66) for insulation. These through rail-mount terminal blocks are mounted using DIN-35 rails..

## Electrical data

IEC/EN 60947-7-1			Power Loss
Ratings per	III	III	Power loss, per pole (potential)
Overvoltage category	III	II	0.532 W
Pollution degree	3	2	Rated current $I_N$ for specified power loss
Nominal voltage	500 V	-	20 A
Rated surge voltage	6 kV	-	Resistance value for specified, current-dependent power loss
Rated current	20 A	-	0.00133 Ω

**Connection data**

Clamping units	4
Total number of potentials	2
Number of levels	2

**Connection 1**

Connection technology	CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper Aluminum
Connectable conductor materials (note)	

**Terminating Aluminum Conductors**  
WAGO Spring-Clamp Terminal Blocks are suitable for solid aluminum conductors up to 4 mm<sup>2</sup>/12 AWG if WAGO "Alu-Plus" Contact Paste [249-130](#) is used for termination.

"Alu-Plus" Contact Paste Advantages:

- Automatically destroys the oxide film during clamping.
- Prevents fresh oxidation at the clamping point.
- Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).
- Provides long-term protection against corrosion.

Using terminal blocks with CAGE CLAMP® Spring Pressure Connection Technology, **aluminum conductors must first be cleaned with a blade** and then immediately inserted into the clamping units filled with "Alu-Plus" contact paste.

It is also possible to apply WAGO "Alu-Plus" **additionally** on the whole surface of the aluminum conductor before termination.

Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors:  
2.5 mm<sup>2</sup> = 16 A  
4 mm<sup>2</sup> = 22 A

Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Note (conductor cross-section)	12 AWG: THHN, THWN
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Wiring direction	Front-entry wiring

**Physical data**

Width	5 mm / 0.197 inches
Height	95 mm / 3.74 inches
Depth from upper-edge of DIN-rail	58.5 mm / 2.303 inches

**Mechanical data**

Design	horizontal type
Mounting type	DIN-35 rail
Marking level	Center/side marking

## Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	gray/gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.214 MJ
Weight	11.4 g

## Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

## Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-20
eCl@ss 9.0	27-14-11-20
ETIM 9.0	EC000897
ETIM 8.0	EC000897
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	CN
GTIN	4050821293705
Customs tariff number	85369010000

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	2157201.01	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
CSA DEKRA Certification B.V.	C22.2	1536071	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UR Underwriters Laboratories Inc.	UL 1059	E45172			

## Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Shipping	EN 60947	20-HG1941090-PDA
BV Bureau Veritas S.A.	EN 60947	07436/F0 BV
DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001V2
LR Lloyds Register	EN 60947	91/20112 (E9)

## Downloads

## Environmental Product Compliance

## Compliance Search

Environmental Product Compliance 280-543



## Documentation

## Additional Information

Technical Section

pdf  
2246.92 KB

## Bid Text

280-543

19.02.2019

xml  
3.50 KB

280-543

02.03.2017

doc  
25.00 KB

## CAD/CAE-Data

## CAD data

2D/3D Models 280-543



## CAE data

EPLAN Data Portal  
280-543WSCAD Universe  
280-543

ZUKEN Portal 280-543



## 1 Compatible Products

### 1.1 Required Accessories

#### 1.1.1 End plate

**Item No.: 280-342**

End and intermediate plate; 2.5 mm thick; gray

**Item No.: 280-343**

End and intermediate plate; 2.5 mm thick; orange

**Item No.: 280-369**

Intermediate plate; 1.1 mm thick; orange

### 1.2 Optional Accessories

#### 1.2.1 DIN-rail

##### 1.2.1.1 Mounting accessories

**Item No.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

**Item No.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

**Item No.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

**Item No.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

**Item No.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

**Item No.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

**Item No.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

**Item No.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm"; silver-colored

**Item No.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm"; silver-colored

**Item No.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

**Item No.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

**Item No.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

#### 1.2.2 Ferrule

##### 1.2.2.1 Ferrule

**Item No.: 216-301**Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow**Item No.: 216-302**Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise**Item No.: 216-201**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white**Item No.: 216-101**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; un-insulated; electro-tin plated; silver-colored**Item No.: 216-202**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray**Item No.: 216-102**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated; silver-colored**Item No.: 216-203**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; red**Item No.: 216-103**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; un-insulated; electro-tin plated**Item No.: 216-204**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black**Item No.: 216-104**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; un-insulated; electro-tin plated; silver-colored

### 1.2.3 Installation

#### 1.2.3.1 Cover



##### [Item No.: 709-154](#)

Cover; Type 2; suitable for cover carrier, type 2; 1 m long; transparent

#### 1.2.3.2 Cover carrier



##### [Item No.: 709-168](#)

Cover carrier; Type 2; incl. fixing/retaining screws and knurled nut; suitable for 283 to 285 Series rail-mounted terminal blocks; suitable for 279 to 281 Series double- and triple-deck terminal blocks; suitable for 780 to 785, 775, 776 and 777 Series TOP-JOB® rail-mounted terminal blocks; suitable for 280 Series sensor and actuator terminal blocks; suitable for 282 Series disconnect/test terminal blocks for transformer circuits; gray

#### 1.2.3.3 Mounting accessories



##### [Item No.: 209-106](#)

Mounting carrier; for isolated mounting on DIN 35 rails; gray



##### [Item No.: 249-116](#)

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

### 1.2.4 Insulation stop

#### 1.2.4.1 Insulation stop



##### [Item No.: 280-470](#)

Insulation stop; 0.08 - 0.2 mm<sup>2</sup> "s" (0.14 mm<sup>2</sup> "f-st"); 5 pieces/strip; white



##### [Item No.: 280-471](#)

Insulation stop; 0.25 - 0.5 mm<sup>2</sup>; 5 pieces/strip; light gray



##### [Item No.: 280-472](#)

Insulation stop; 0.75 - 1 mm<sup>2</sup>; 5 pieces/strip; black

### 1.2.5 Jumper

#### 1.2.5.1 Jumper



##### [Item No.: 280-490](#)

Jumper; 10-way; insulated; gray



##### [Item No.: 280-482](#)

Jumper; 2-way; insulated; gray



##### [Item No.: 280-492](#)

Jumper; 2-way; insulated; gray



##### [Item No.: 280-483](#)

Jumper; 3-way; insulated; gray



##### [Item No.: 280-484](#)

Jumper; 4-way; insulated; gray



##### [Item No.: 280-485](#)

Jumper; 5-way; insulated; gray



##### [Item No.: 280-402](#)

Jumper; insulated; gray



##### [Item No.: 280-409](#)

Jumper; insulated; gray



##### [Item No.: 780-452](#)

Staggered jumper; from 1 to 2; insulated; gray



##### [Item No.: 780-453](#)

Staggered jumper; from 1 to 3; insulated; gray



##### [Item No.: 780-454](#)

Staggered jumper; from 1 to 4; insulated; gray



##### [Item No.: 780-455](#)

Staggered jumper; from 1 to 5; insulated; gray

### 1.2.5.1 Jumper

**Item No.: 780-456**

Staggered jumper; from 1 to 6; insulated; gray

**Item No.: 709-110**Wire commoning chain; 2.5 mm<sup>2</sup>; insulated; black**Item No.: 709-457**

Staggered jumper; from 1 to 7; insulated; gray

Wire commoning chain; 2.5 mm<sup>2</sup>; insulated; black**Item No.: 780-458**

Staggered jumper; from 1 to 8; insulated; gray

Wire commoning chain; 2.5 mm<sup>2</sup>; insulated; black**Item No.: 281-421**

Vertical jumper; insulated; gray

**Item No.: 210-123**

Wire commoning chain; insulated; blue



### 1.2.6 Marking

#### 1.2.6.1 Marker

**Item No.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

**Item No.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

**Item No.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

### 1.2.7 Protective warning marker

#### 1.2.7.1 Cover

**Item No.: 280-415**

Protective warning marker; for 5 terminal blocks; with high-voltage symbol; black; yellow

### 1.2.8 Push-in type wire jumper

#### 1.2.8.1 Jumper

**Item No.: 249-126**Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 110 mm long; black**Item No.: 249-123**Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 180 mm long; black**Item No.: 249-127**Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 250 mm long; black**Item No.: 249-125**

Push-in type wire jumper; insulated; 60 mm long; black

### 1.2.9 Test and measurement

#### 1.2.9.1 Testing accessories

**Item No.: 249-142**L-type end module; modular; with rigid contact pin; End module; 1,50 mm<sup>2</sup>; gray**Item No.: 249-141**L-type test plug module; modular; with spring-loaded contact pin; Center module; 1,50 mm<sup>2</sup>; gray

## 1.2.10 Tool

## 1.2.10.1 Operating tool

**Item No.: 210-658**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

**Item No.: 210-657**


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

## Installation Notes

## Installation



Snapping a terminal block onto the DIN-rail.



Removing a terminal block from the assembly.



Double-deck terminal blocks accommodate two circuits of different potentials on two decks; different circuits can be differentiated by color coding either deck (280 Series). The lower deck is wider than the upper for easier wiring.

## Conductor termination



The flexible marker carrier, which is placed above the wiring level, can be pushed aside during wiring or commoning. The carrier has two staggered levels for WMB markers that perfectly align with the terminal block decks.




## Commoning



Commoning using an adjacent jumper.  
Push jumpers down until fully inserted!


## Commoning



Commoning with a vertical jumper (281-421).  
Push vertical jumper down until fully inserted!



Combining vertical and adjacent jumpers.



With a terminal block width of just 5 mm, an effective width of just 2.5 mm for terminal blocks of same or different potentials can be realized for conductors ranging 0.08 mm<sup>2</sup> ... 2.5 mm<sup>2</sup> (28 ... 14 AWG).

Use 50% less rail space with double-deck terminal blocks.

## Marking



Labeling via WMB Multi Marking System.