

# Concord

## BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747



### Features

- Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 55° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 55° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1081lm, luminaire efficacy: 51lm/W, LOR: 100%, colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, DALI dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit DALI track adaptor, suitable for Concord Lytespan 3+DALI track, ingress protection rating: IP20. IMPORTANT NOTE: This fixture can only be used on the Lytespan DALI or Lytebeam DALI tracks !

### Product Overview


Product name	BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4280895
Fixture luminous flux (lm)	553/1081
Luminaire efficacy (lm/W)	52
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White

# Concord

## BEACON LED MUSE II 97CRI 3000K L3+DALI WHITE 2059747

CRI (Ra)	97
Colour Variation Initial (SDCM)	3
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597475
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	1081

### Photometry

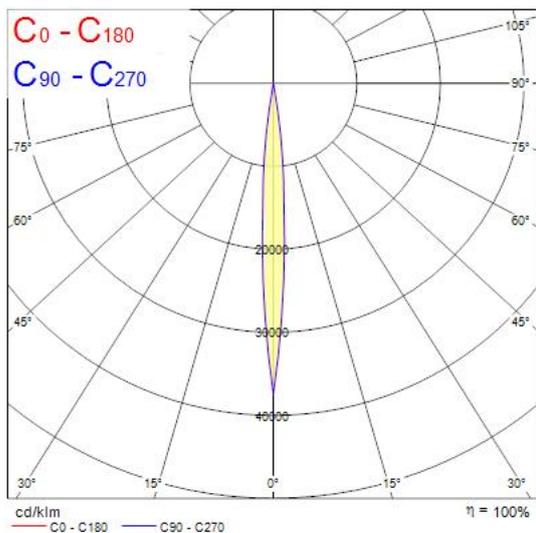

### Technical drawings

