



Features

- Concord OFFICELYTE 1200 3000K HE DALI EMPRO is a high performance low glare luminaire for offices and education applications. Suitable for lay in, as well as for pull up, into concealed grid and plasterboard ceilings with our optional wedge accessory kits suitable. Optical solution is a combination of Tp(a) rated central prismatic and side diffusers. Painted steel housing with RAL 9016 finishing colour. Painted steel housing with RAL 9016 finishing colour. 1196x296x60mm dimensions. 3300lm luminous flux, 30.5W total power consumption, 108lm/W efficacy level, CRi80 3000K (Warm white) LED light sources with chromaticity tolerance of 3-step MacAdam ellipse. Conforming to EN 12464-1 for indoor work places, UGR<19. IK03 impact resistance, IP20 ingress protection level. IEC Class I electrical protection. Photobiological Risk Group 1. Lifespan 93k hours at L80B50. Glow Wire test 850°C. Integrated Self-Test DALI dimmable emergency with 3-hours LiFePO4 battery. DALI-2 driver.

Product Overview


Product name	OFFICELYTE 1200 3000K HE DALI EMPRO
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
General application	Office, Education
ETIM Class	EC002892
Fixture luminous flux (lm)	3, 300
Luminaire efficacy (lm/W)	108
Correlated colour temperature (k)	3000

Concord

OFFICELYTE 1200 3000K HE DALI EMPRO 2069547

Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	80
Glare control	< 19
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	345
Total power consumption (W)	30.5
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5025768695478
Warranty	5 years
Built in presence detector	NONE
Virtual assistant compatibility	N/A
Dimming method	DALI-2

Photometry

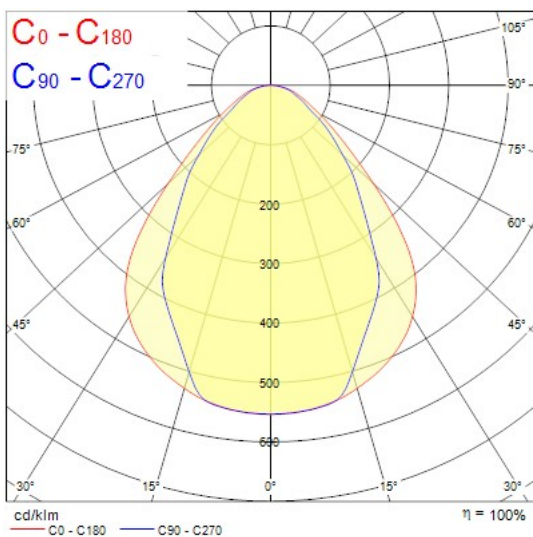

Technical drawings

