

Features

• Simple and slick integral design with no driver box and without any visible screws
New technology utilization for improved performance
Invisible in-track adaptor for an impressive architectural look
Extremely precise light beams due to the high-quality lenses
#80mm die-cast aluminium body, Fix beam angle: 55° , Textured white finishing colour
Light color temperature: 4000K, natural light
System power: 18W, Fixture lumen output: 1600lm, efficacy: 89lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
Operating voltage 220-240V / 50-60Hz, electronic driver, DALI dimmable
Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet.
Compatible with OneTrack
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
Horizontal rotation: 355°, vertical tilt: 90°
Nominal product dimensions: D.80mmx200mm
5 years warranty. Suitable for track mounting


Product Overview

Product name	CONCORD BEACON 4000K WIDE DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1600
Luminaire efficacy (lm/W)	89

CONCORD BEACON 4000K WIDE DALI WHITE 2062531

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Beam Angle (°)	55
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768625314
Warranty	5 years
Dimming method	DALI

Photometry

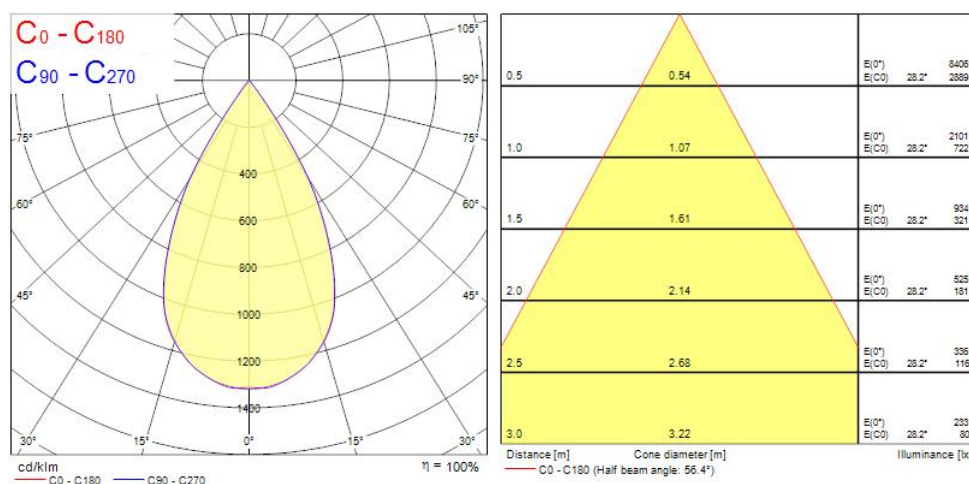


Concord

CONCORD BEACON 4000K WIDE DALI WHITE

2062531

Technical drawings

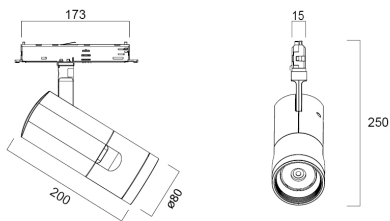

Data table

GENERAL DATA

Product name	CONCORD BEACON 4000K WIDE DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
Operating temperature range (°C)	-10°C...+35°C
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1600
Luminaire efficacy (lm/W)	89
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Luminous Intensity (cd)	1600
Beam Angle (°)	55

CONCORD BEACON 4000K WIDE DALI WHITE 2062531

Distribution type	Symmetric
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	18
Current (A)	0.084
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %	10
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	500
Inrush Current (A)	16
Inrush Duration (μ s)	100
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	70
Max. products per 16A B Breaker	55

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	56000

PHYSICAL DATA

Housing colour	RAL9016
----------------	---------

CONCORD BEACON 4000K WIDE DALI WHITE 2062531

IP rating	IP20
IK rating	IK02
Diffuser finish	Other
Diffuser material	PMMA Acrylic
Reflector finish	Not Applicable
Nominal Product Length (mm)	200
Nominal Product Width (mm)	80
Nominal Product Height (mm)	250
Nominal Product Diameter (mm)	80
Weight (kg)	1.02

PACKAGING

Product EAN number	5025768625314
Packaging single length / height (cm)	30.5
Packaging single width (cm)	13.5
Packaging single depth (cm)	20.5
DUN14 (inner)	05025768625314
Units per outer package	1
Packaging outer length / height (cm)	30.5
Packaging outer width (cm)	13.5
Packaging outer depth (cm)	20.5

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-35
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No