

Twofold faceplate, vertical 71 mm centre distance, for a double switch and one 45x45 function, Niko Toggle alu black brushed


224-57856



The Niko Toggle twofold vertically oriented faceplate clicks onto a double switch and one 45 x 45 mm function that have been vertically installed on top of each other with a centre distance of 71 mm. The faceplate combines with any available Niko Toggle double switch function and a Niko 45 x 45 mm function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of aluminium. The lower frame is made of dark grey, black coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 6 mm thick and the lower frame 2 mm.

Niko recommends a design combination with a finishing set in the following colour: alu black for Niko Rocker and Niko Toggle finishing sets and black coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

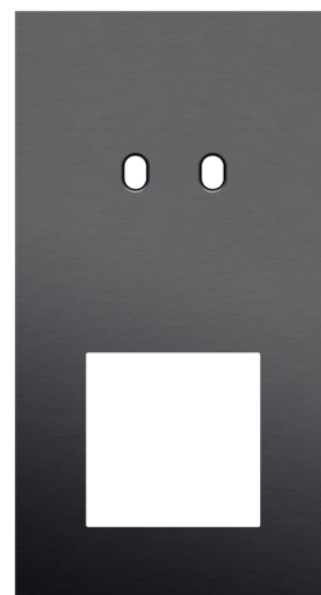

Technical data

Twofold faceplate, vertical 71 mm centre distance, for a double switch and one 45x45 function, Niko Toggle alu black brushed.

- Double faceplate for two switches.
- Colour faceplate: alu black brushed
- Colour RAL (approximately): 000 20 00
- Colour NCS (approximately): NCS S 8005-R50B
- Recommended colour central plate: alu black for Niko Rocker and Niko Toggle finishing sets and black coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upper frame is made of aluminium. The lower frame is made of dark grey, black coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA).

- Surface treatment: anodised
- Surface finishing: matt
- Coating lower frame: enamelled black
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm
- Marking: EU