


LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK
0038802

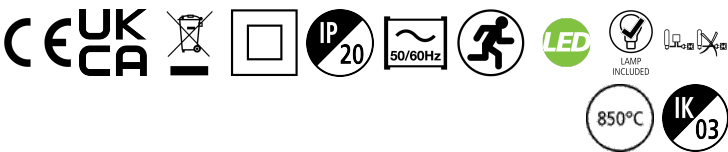

Features

• LiFeSafe PRO Downlight RA R EM3 NM DA BK is a black miniature DALI addressable emergency recessed downlight with interchangeable optics for open area and escape route illumination. Non-maintained self-test 3Hr emergency duration with LiFePO4 rechargeable battery. Quick and easy installation with driver module and battery pack contained in articulated case that can pass through 44-50mm cut-out. Suitable for ceiling thickness 5-15mm. 225lm (open area) / 200lm (corridor), 3.5W, IK03, IP20. Class II electrical construction. 6-year warranty


Product Overview

Product name	LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Light source included	0038802
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC001957
Fixture luminous flux (lm)	225
Luminaire efficacy (lm/W)	64
Correlated colour temperature (k)	5000
CRI (Ra)	70
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	225
Luminous flux (emergency) (lm)	225
Electrical protection	Class II
Control gear type	LED driver constant current

LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK
0038802

Housing colour	Black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288388021
Warranty	6 years

Technical drawings

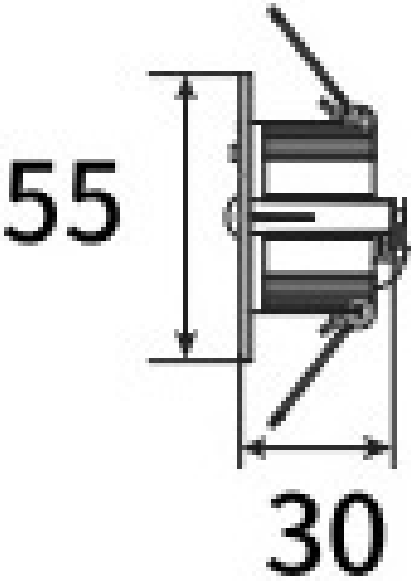

Data table

GENERAL DATA

Product name	LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office

LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK 0038802

Operating temperature range (°C)	0°C...+45°C
ETIM Class	EC001957
Warranty	6 years

OPTICAL DATA

Fixture luminous flux (lm)	225
Luminaire efficacy (lm/W)	64
Correlated colour temperature (k)	5000
CRI (Ra)	70
Photobiological Risk Group	RG2
Lumen maintenance at end of nominal life (%)	70
Luminous flux (emergency) (lm)	225
Luminous flux (emergency) (lm)	225
Emergency duration (h)	3

ELECTRICAL DATA

Light source included	0038802
Current (A)	0.035
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.35
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	84.2
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Drive current (mA)	575
Inrush Current (A)	30
Inrush Duration (µs)	220
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	209
Max. products per 13A C Breaker	271
Max. products per 16A C Breaker	344

LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK 0038802

Max. products per 20A C Breaker	418
Max. products per 10A B Breaker	313
Max. products per 13A B Breaker	271
Max. products per 16A B Breaker	334
Max. products per 20A B Breaker	418
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	0.75

LIFETIME DATA

Lifespan L70 B10	68000
Lifespan L90 B10	20000

PHYSICAL DATA

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	267
Nominal Product Height (mm)	30
Nominal Product Diameter (mm)	55
Weight (kg)	0.39
Recessed Depth (mm)	30

PACKAGING

Product EAN number	5410288388021
Packaging single length / height (cm)	46.0
Packaging single width (cm)	31.0
Packaging single depth (cm)	30.0
DUN14 (inner)	05410288388021
Units per outer package	1
Packaging outer length / height (cm)	46.0



LIFESAFE PRO DOWNLIGHT RA R EM3 NM DA BK
0038802

Packaging outer width (cm)	31.0
Packaging outer depth (cm)	30.0

SAFETY DATA

Glow Wire Test (°C)	850
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	No