


Data Sheet | Item Number: 714-110/000-047
1-conductor female connector; push-button; 1.5 mm²; Pin spacing 3.5 mm; 10-pole;
direct marking; 1,50 mm²; black
<https://www.wago.com/714-110/000-047>



Color: ■ black

Similar to illustration

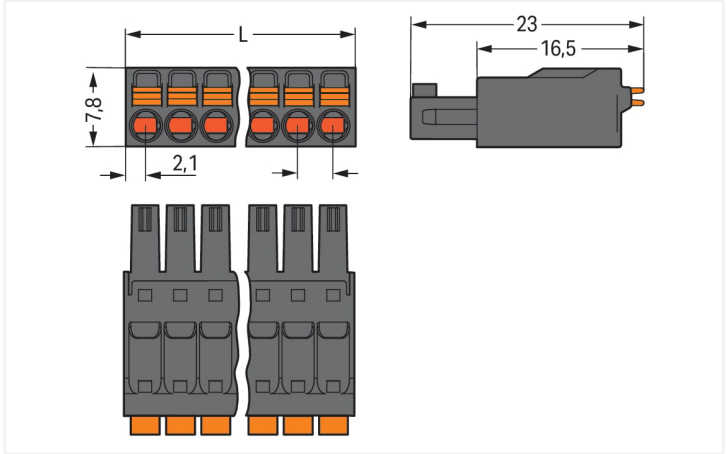

Dimensions in mm
L = (pole no. – 1) x pin spacing + 4.2 mm

Federleiste/Buchse Serie 714 mit Rastermaß 3,5 mm

Die Federleiste/Buchse mit der Artikelnummer 714-110/000-047 bietet eine reibungslose Elektroinstallation. Unsere Leiterplatten-Steckverbinder ermöglichen Ihnen die größtmögliche Flexibilität bei verschiedenen Montagearten. Für den Leiteranschluss werden bei dieser Federleiste/Buchse Abisolierlängen von 9 bis 10 mm benötigt. Bei diesem Produkt findet die Push-in CAGE CLAMP®-Technologie Verwendung. Mit der Push-in CAGE CLAMP® Anschlusstechnik wird der Anschluss aller Leiterarten perfekt. Durch den Zusatznutzen des direkten Steckens können Leiter mit ausreichender Knicksteifigkeit sowie feindrähtige Leiter mit Aderendhülse ohne Werkzeug gesteckt werden. Die Abmessungen sind in Breite x Höhe x Tiefe (35,7 x 7,8 x 23) mm. In Abhängigkeit von der Leiterart ist diese Federleiste/Buchse ausgelegt für Leiterquerschnitte von 0,2 mm² bis 1,5 mm². Die Kontaktberfläche besteht aus Zinn. Diese Federleiste/Buchse wird durch einen Drücker betätigt. Das "Multi Connection System" – MCS von WAGO ist das vielfältige Steckverbindersystem mit überzeugenden Lösungen für Ihre Anwendungen.

Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	160 V	160 V	320 V
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV
Rated current	8 A	8 A	8 A

Approvals per		UL 1059		
Use group	B	C	D	
Rated voltage	150 V	-	-	
Rated current	8 A	-	-	



Connection data																						
Clamping units	10	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Push-button</td></tr><tr><td>Actuation direction 1</td><td>Operation parallel to conductor entry</td></tr><tr><td>Solid conductor</td><td>0.2 ... 1.5 mm² / 24 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.2 ... 1.5 mm² / 24 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 0.75 mm²</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 1.5 mm²</td></tr><tr><td>Strip length</td><td>9 ... 10 mm / 0.35 ... 0.39 inches</td></tr><tr><td>Pole number</td><td>10</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Push-button	Actuation direction 1	Operation parallel to conductor entry	Solid conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG	Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm²	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm²	Strip length	9 ... 10 mm / 0.35 ... 0.39 inches	Pole number	10	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																					
Actuation type	Push-button																					
Actuation direction 1	Operation parallel to conductor entry																					
Solid conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG																					
Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 16 AWG																					
Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm²																					
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 1.5 mm²																					
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches																					
Pole number	10																					
Conductor entry direction to mating direction	0 °																					
Total number of potentials	10																					
Number of connection types	1																					
Number of levels	1																					

Physical data		
Pin spacing	3.5 mm / 0.138 inches	
Width	35.7 mm / 1.406 inches	
Height	7.8 mm / 0.307 inches	
Depth	23 mm / 0.906 inches	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Female connector/socket	
Connector (connection type)	for conductor	
Mismating protection	No	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	black	
Material group	I	
Insulation material (main housing)	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Copper alloy	
Contact Plating	Tin	
Fire load	0.049 MJ	
Weight	4.3 g	



Environmental requirements	
Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data	
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 9.0	EC001284
ETIM 8.0	EC001284
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	IN
GTIN	4055143237765
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7604
KEMA/KEUR DEKRA Certification B.V.	EN 61984	2198681.01

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 714-110/000-047	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	



1 Compatible Products

1.1 System counterpart

1.1.1 Male connector/plug



Item No.: 714-170
THT male header; 0.8 x 0.8 mm solder pin; angled; Pin spacing 3.5 mm; 10-pole; black



Item No.: 714-140
THT male header; 0.8 x 0.8 mm solder pin; straight; Pin spacing 3.5 mm; 10-pole; black

1.2 Optional Accessories

1.2.1 Ferrule

1.2.1.1 Ferrule



Item No.: 216-241
Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-141
Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



Item No.: 216-242
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-262
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-142
Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



Item No.: 216-143
Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92



Item No.: 216-144
Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored

1.2.2 Test and measurement

1.2.2.1 Testing accessories



Item No.: 735-500
WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 6 mm uninsulated; Test lead for soldering up to 0,5mm²

1.2.3 Tool

1.2.3.1 Operating tool




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft




Item No.: 210-647
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Solid and ferruled conductors are terminated by simply pushing them into unit.




Inserting/removing fine-stranded conductors via push-button.

Coding



Coding a female connector by removing coding finger(s).

Testing



Testing via 1 mm Ø test pin – insertion parallel to conductor entry.

Marking



Pole marking via factory direct marking