

136-305 20W 3000K specific configuration
Batten light | 600mm | 10~25W | IP20 | 3-CCT

Introduction

Purpose of this Document

This document provides information for 136-305 20W 3000K . During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	18.0 W
Correlated Colour Temperature	3017 K
Total lumen output	2037 lm
Efficiency	113 lm/W

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	229 V
RMS Input current feed. I_{RMS}	0.083 A
Total input power	18.0 W

Frequency of input power	50.1 Hz
Power factor	0.95
Displacement power factor	0.95

Total harmonic distortion of the current	10.97%
Total harmonic distortion of the voltage	2.59%

Input Power Curve

Voltage - Current

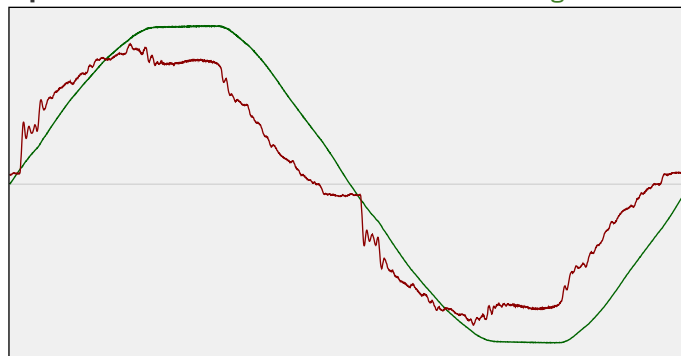

Efficiency

Radiated power efficiency: 35.2%




Lumen efficiency: 113 lm/W



Harmonics

3rd Harmonic	4.54%
5th Harmonic	7.81%
7th Harmonic	2.26%
9th Harmonic	4.08%
11th Harmonic	0.79%

Current Harmonics %

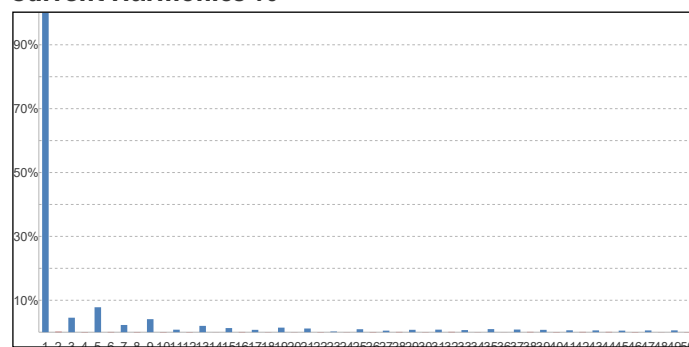


136-305 20W 3000K specific configuration

Colour measurement details


Total lumen output 2037 lm
 Correlated Colour Temperature 3017 K
 Colour coordinates CIE 1931 (x;y) = (0.431;0.393)
 Colour deviation from BBL Duv = -0.0036

TM30-18 Colour Fidelity Index R_f 85.6
 TM30-18 Colour Gamut Index R_g 98.0
 Colour Rendering Index (Ra) CRI 84.7
 Colour Rendering Index. (red component) $R_9 = 14.2$


Colour Quality Scale CQS = 82.9
 Television Lighting Consistency Index TLCI = 69

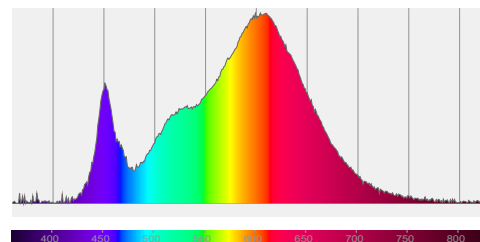

Relative spectral power distribution

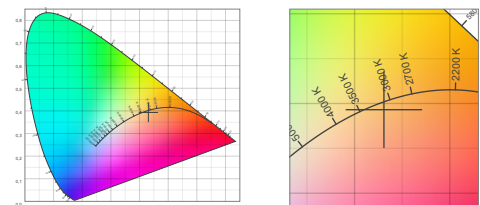

TM30 details

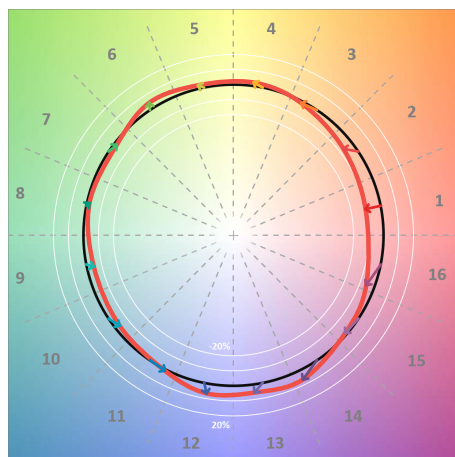


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	82	-10%	0%
C2	82	-7%	7%
C3	78	-2%	11%
C4	89	2%	7%
C5	92	2%	4%
C6	92	4%	-2%
C7	88	-2%	-7%
C8	94	-2%	-2%
C9	91	-5%	2%
C10	86	-3%	8%
C11	83	0%	12%
C12	85	7%	3%
C13	88	5%	-7%
C14	81	6%	-15%
C15	80	-2%	-13%
C16	79	-7%	-15%

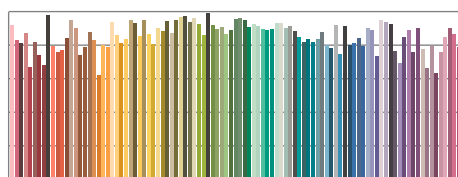

TM30-18 R_f -values per reference colour

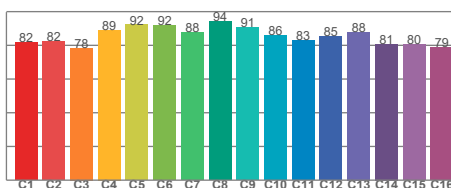


TM30-18 R_f -values per hue bin

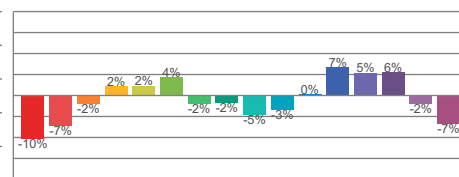


TM30 Chroma shift

Colour Quality details

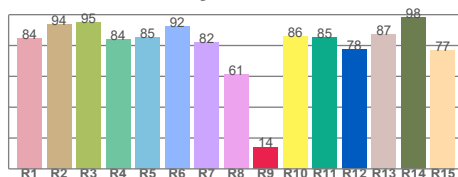

Colour Rendering Index

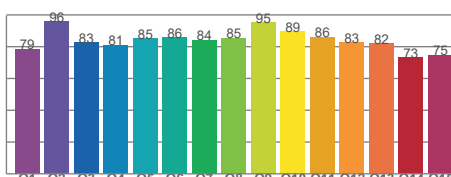

Colour Quality Scale