

Product data sheet Spirotech

Product name

SpiroVent RV2 - $\frac{3}{4}$ " -Uni

Product properties

A brass (microbubble) deaerator with a 22 mm - 2" universal connection

- Removes all circulating air and micro bubbles effectively
- Removes trapped air when installed at the correct location
- Greatly reduces the need for manual venting
- Applicable with 50/50 Glycol / Water (Volume)
- Constant low-pressure drop
- No unnecessary shutdown
- Connection diameters from 22 mm to 2" (G2)
- Exceptional guarantee


Article number

UA075W

Product image



Product dimensions

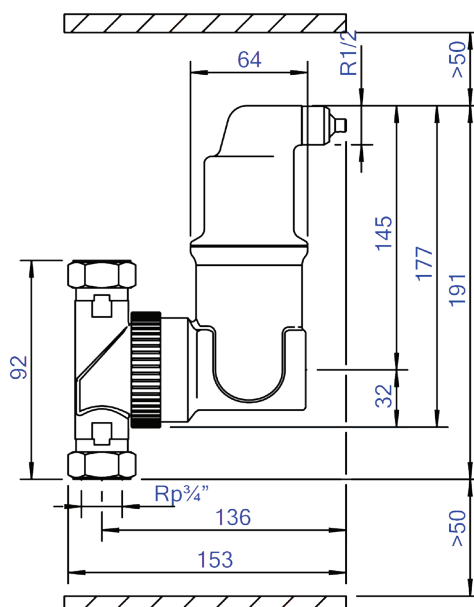

Product data sheet Spirotech

ETIM product data

| | |
|--------------------------|--|
| Housing material | Brass |
| With drain valve | No |
| Housing material quality | Other |
| Backwash filter | No |
| Max. operating pressure | 10 bar |
| Variable flow direction | Yes |
| With insulation | No |
| Separator type | Air |
| Connection | Internal thread cylindrical BSPT-Rp (ISO 7-1 / EN 10226-1) |
| Model | Horizontal/vertical |
| Nominal diameter | 3/4 inch (20) |
| Max. glycol mixture | 50 % |
| Suitable for heating | Yes |
| Suitable for cooling | Yes |
| Construction length | 195 mm |

| | |
|---------------------------------------|-----------|
| Article compression class | PN 10 |
| Surface protection | Untreated |
| Suitable for open system | No |
| Suitable for closed system | Yes |
| Suitable for solar | No |
| With dismountable filter | No |
| Filter volume | 0.38 l |
| Magnet operating principle | No |
| With automatic de-aerator | Yes |
| With integrated replenishment automat | No |
| With couplers | No |
| Material of connection | Brass |
| Inlet/outlet offset distance | 0 mm |
| Material quality connection | Other |
| Operating principle | Other |

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

