


Concord

CONCORD BEACON 4000K MEDIUM DALI WHITE 2062528

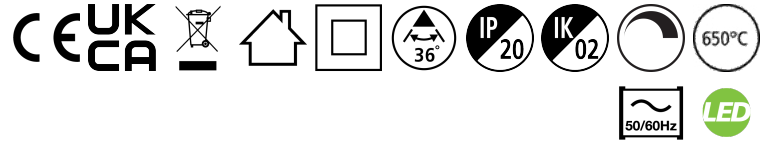

Features

- Simple and slick integral design with no driver box and without any visible screws

New technology utilization for improved performance
Invisible in-track adaptor for an impressive architectural look
Extremely precise light beams due to the high-quality lenses
#80mm die-cast aluminium body, Fix beam angle: 36° , Textured white finishing colour
Light color temperature: 4000K, natural light
System power: 18W, Fixture lumen output: 1675lm, efficacy: 93lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
Operating voltage 220-240V / 50-60Hz, electronic driver, DALI dimmable
Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet.
Compatible with OneTrack
Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
Horizontal rotation: 355°, vertical tilt: 90°
Nominal product dimensions: D.80mmx200mm
5 years warranty. Suitable for track mounting

Product Overview


Product name	CONCORD BEACON 4000K MEDIUM DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
ETIM Class	EC001744
Fixture luminous flux (lm)	1675
Luminaire efficacy (lm/W)	93

Concord

CONCORD BEACON 4000K MEDIUM DALI WHITE 2062528

LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Variation Initial (SDCM)	2
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL9016
IP rating	IP20
IK rating	IK02
Product EAN number	5025768625284
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	1625

Photometry

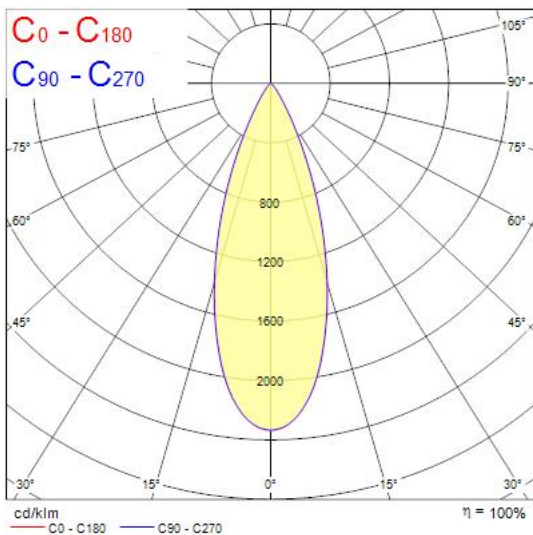

Technical drawings

