



PHOTOMETRIC LIGHT REPORT

Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Article number: 136-115



Go to the
webshop
of Tronix
Lighting



TRONIX



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 136-115. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 136-115 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 136-115 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Laboratory and equipment

| | |
|--------------------------------------|--|
| Laboratory owner and location | Tronix Lighting BV. Uden. The Netherlands |
| Gonio spectrometer system and type | Viso Systems Type C. horizontal |
| Spectrometer manufacturer and model | (Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm |
| Flicker meter manufacturer and model | Viso Systems LabFlicker |
| Oscilloscope manufacturer and model | Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz) |
| Power meter manufacturer and model | Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer |
| Power source manufacturer and model | (DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source |
| Datalogger Manufacturer and Model | Omega 8-Channel Thermocouple Thermometer/Data Logger |

Measurement conditions gonio spectrometer

| | |
|---|--|
| Number of C-planes and Resolution | 2 planes – 180° |
| γ (gamma)-Resolution | 1° |
| Test Distance | 1.81 m |
| Room Temperature and Humidity | 22°C +/- 10% – RH 50% +/- 20% |
| Input Power. Power and Displacement Factors | 13.0 W – PF 0.96 – DPF 0.96 |
| Frequency of Input Power | 50 Hz |
| Warm-up Time and Variation | Lamp stabilized in 15 min 0 sec --1.3% |

Tested light source

| | |
|-----------------------------|---|
| Manufacturer and Order Code | Tronix Lighting – 136-115 |
| Product Description | Reflector downlight eco white Ø145mm 10/15W 3-CCT |

Main Light Measurement Results

| | |
|---------------------------------------|---|
| Output – Total Lumen (Up% / Down%) | 1346 lm – 0% / 100% |
| Efficiency | 104 lm/W |
| Energy efficiency class | E |
| Peak Intensity and Beam Angle | 1375 cd – 60.9° |
| Correlated Colour Temperature | CCT = 4140 K |
| Colour Shift. CIE duv | Duv -0.0056 |
| Colour Rendering Index | CRI 88.2 |
| Colour Rendering TM30-18 | R _f 85.5 – R _g 96.3 |
| Television Lighting Consistency Index | TLCI = 77 |
| Flicker | SVM 0.03 – PstLM 0.2 |



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT


Electrical measurement details

Input Power

| | |
|--|---------|
| RMS Input voltage feed. V_{RMS} | 228 V |
| RMS Input current feed. I_{RMS} | 0.060 A |
| Total input power | 13.0 W |
| Frequency of input power | 50 Hz |
| Power factor | 0.96 |
| Displacement power factor | 0.96 |
| Total harmonic distortion of the current | 9.39% |
| Total harmonic distortion of the voltage | 2.37% |

Input Power Curve

Voltage - Current

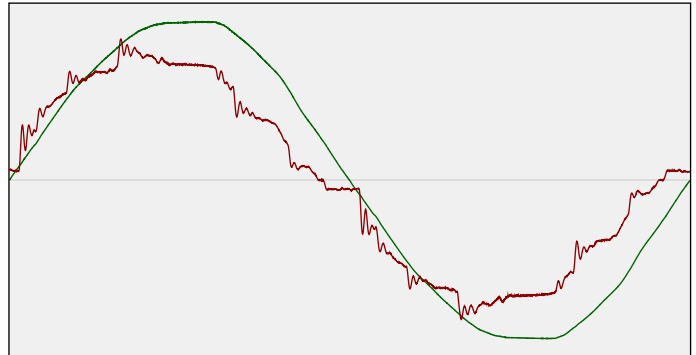

Efficiency

Radiated power efficiency: 33.0%




Lumen efficiency: 104 lm/W



Harmonics

| | |
|---------------|-------|
| 3rd Harmonic | 3.96% |
| 5th Harmonic | 4.17% |
| 7th Harmonic | 2.12% |
| 9th Harmonic | 5.11% |
| 11th Harmonic | 1.73% |

Current Harmonics %

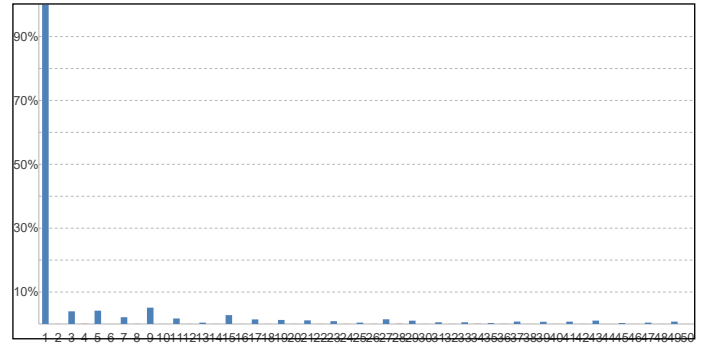

Stabilization Details

Warm-up Conditions

| | |
|----------------------|--------|
| Stable period | 15 min |
| Stable change max | 2.0% |
| Minimum warm-up time | 15 min |

Colour temperature change during warm-up

| | |
|-----------|--------|
| CCT start | 4124 K |
| CCT shift | +16 K |
| CCT end | 4140 K |

Warm-up Results

| | |
|-------------------|---------------------------------|
| Total warmup time | Lamp stabilized in 15 min 0 sec |
| Warmup variation | -1.3% |

Output intensity change during warm-up

| | |
|---------------|---------|
| Output start | 1362 lm |
| Output change | -16 lm |
| Output end | 1346 lm |




136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Colour measurement details


Total lumen output 1346 lm
 Correlated Colour Temperature 4140 K
 Colour coordinates CIE 1931 (x;y) = (0.371;0.359)
 Colour deviation from BBL Duv = -0.0056

TM30-18 Colour Fidelity Index R_f 85.5
 TM30-18 Colour Gamut Index R_g 96.3
 Colour Rendering Index (Ra) CRI 88.2
 Colour Rendering Index. (red component) R9 = 33.0


Colour Quality Scale CQS = 84.8
 Television Lighting Consistency Index TLCI = 77

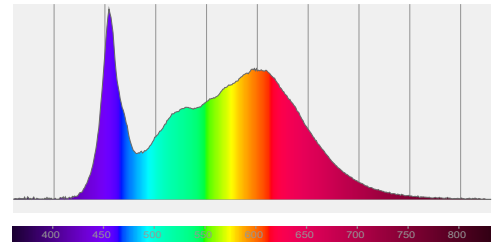

Relative spectral power distribution

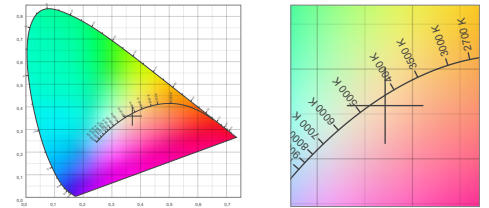

TM30 details

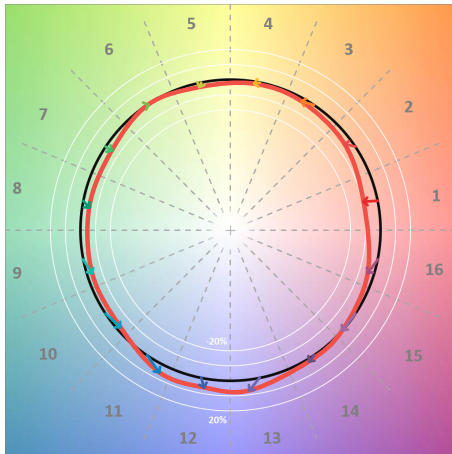


TM30 Colour vectors per hue bin




TM30 Colour distortion


| Hue Bin | R _f | Shifts (%) | |
|---------|----------------|------------|------|
| | | Chroma | Hue |
| C1 | 83 | -9% | 1% |
| C2 | 86 | -5% | 5% |
| C3 | 83 | -3% | 8% |
| C4 | 89 | -1% | 4% |
| C5 | 91 | -3% | 2% |
| C6 | 95 | 0% | -1% |
| C7 | 91 | -5% | 0% |
| C8 | 89 | -5% | 4% |
| C9 | 85 | -4% | 10% |
| C10 | 78 | -3% | 13% |
| C11 | 79 | 5% | 13% |
| C12 | 87 | 6% | 3% |
| C13 | 86 | 7% | -8% |
| C14 | 90 | 2% | -5% |
| C15 | 80 | -1% | -14% |
| C16 | 80 | -5% | -10% |

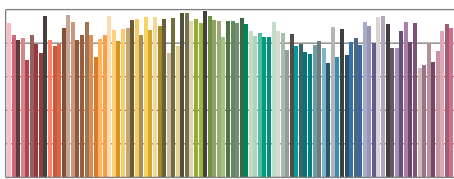

TM30-18 R_f-values per reference colour

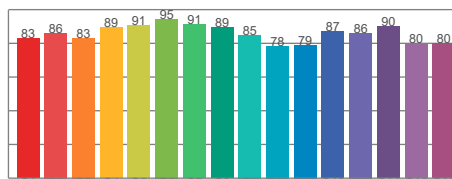


TM30-18 R_f-values per hue bin

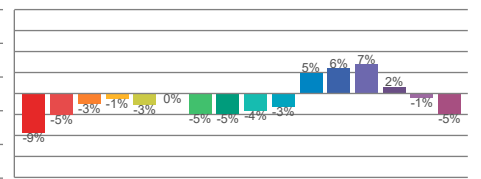


TM30 Chroma shift

Colour Quality details

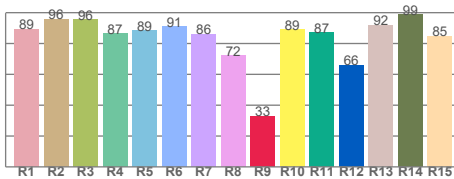

Colour Rendering Index

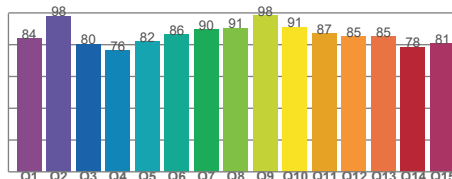

Colour Quality Scale

Document revision date: 1-7-2025 Measurement serial: VFR-250122-0771-MS



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Flicker / temporal light artefacts details

Measurement conditions

| | |
|-------------------------|--|
| Flicker meter type | Viso Systems LabFlicker |
| Flicker/TLA sample rate | 20000 samples/s |
| Measurement time | 5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices |

Flicker indices according to Illuminating Engineering Society (IES)


| | |
|-------------------|--------|
| Flicker frequency | 100 Hz |
| Percent flicker | 1.16 % |
| Flicker index | 0 |

TLA indices (according IEC TR 61547-1. EN 61000-3-3 and EN 61000-4-15)

An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

| | |
|------------------------------|------|
| PstLM value (F < 80 Hz) | 0.2 |
| SVM value (80 < F < 2000 Hz) | 0.03 |


Flicker frame (one flicker period in time domain)

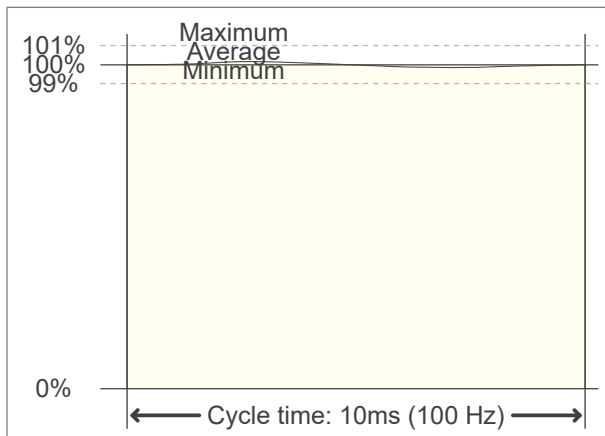

Flicker FFT (flicker curve in frequency domain)



IEEE 1789-2015 Lighting Flicker Risk Zones

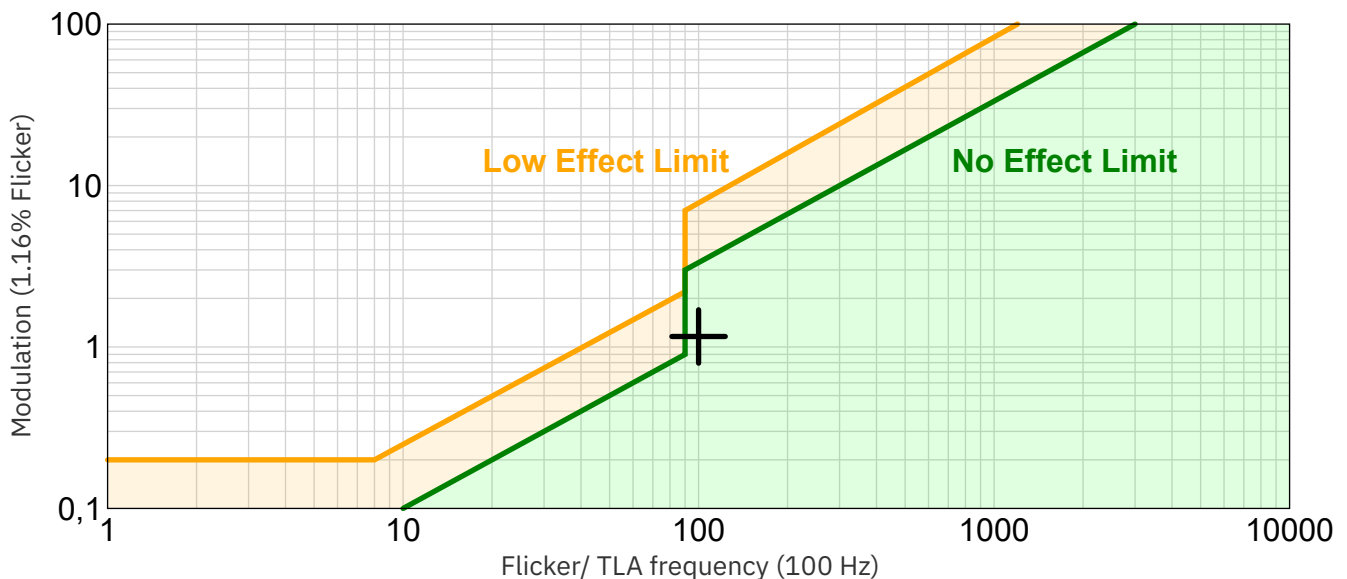

Document revision date: 1-7-2025 Measurement serial: VFR-250122-0771-MS




136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

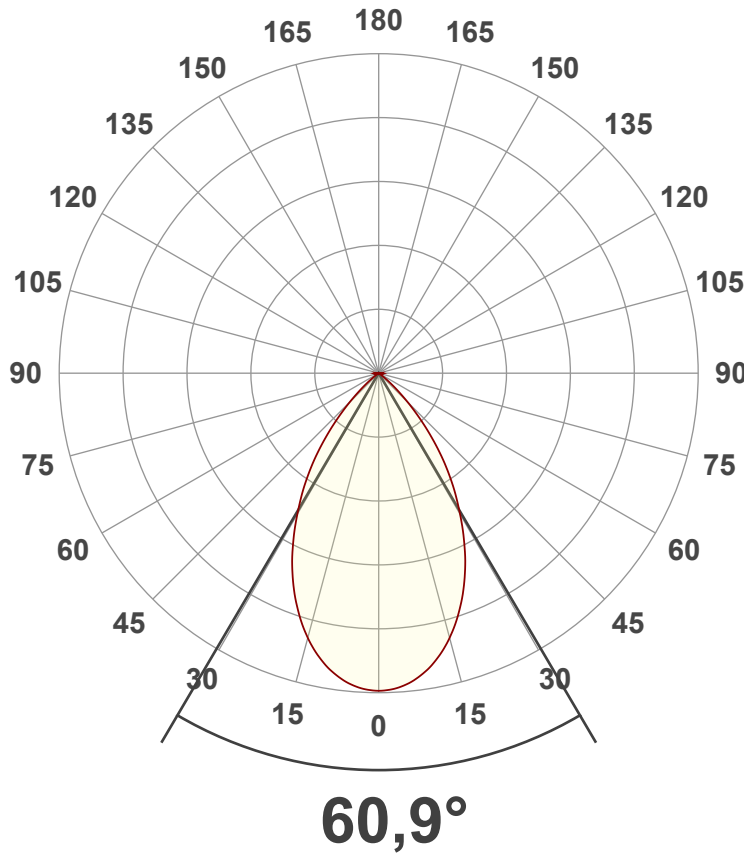

Main Values

| | |
|----------------------|-----------|
| Output (total Lumen) | 1346 lm |
| Lumen Up/Down | 0% / 100% |
| Peak Intensity | 1375 cd |
| Beam Angle (50%) | 60.9° |
| Beam Angle (90%) | 60.9° |
| Beam Angle (10%) | 60.9° |

Cut-off Angle

| | |
|--------------|--------|
| Average 2.5% | 103.6° |
|--------------|--------|

Field Angle

| | |
|-------------|-------|
| Average 10% | 92.9° |
|-------------|-------|


Intensity Ratio

| | |
|--------------|-------|
| In 120° cone | 99.7% |
| In 90° cone | 95.2% |

C planes

- C000-C180
- C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

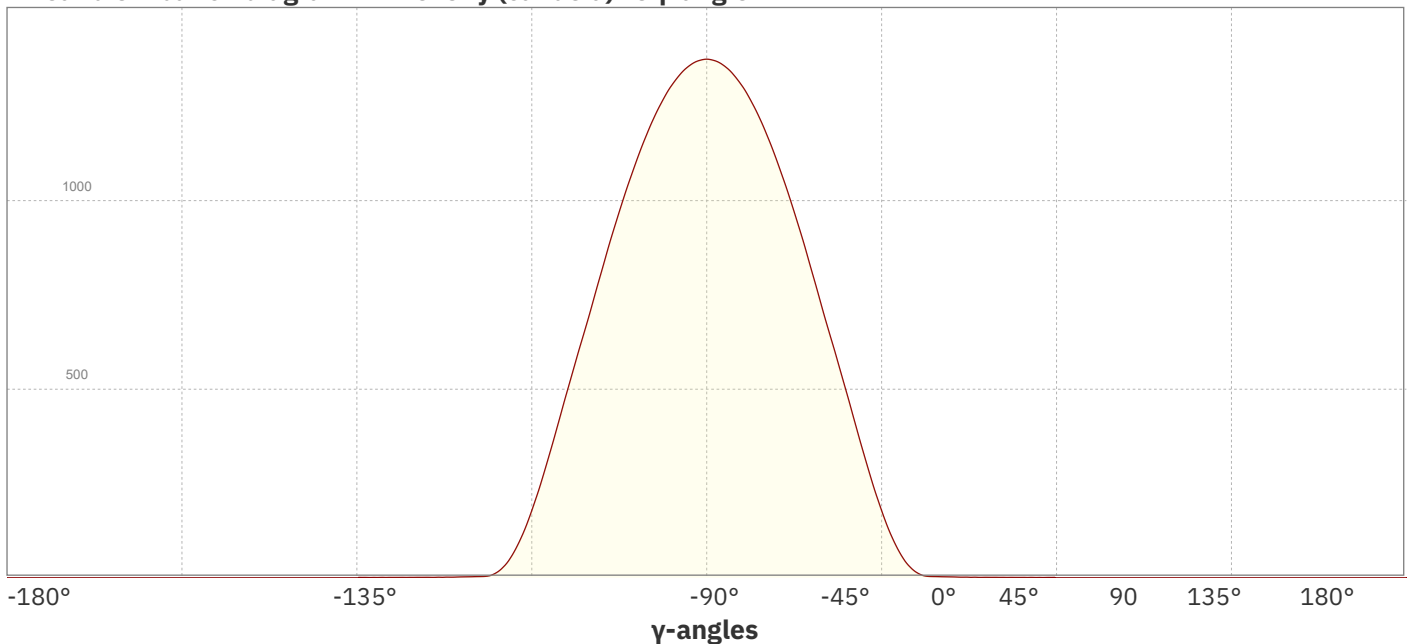


Document revision date: 1-7-2025 Measurement serial: VFR-250122-0771-MS



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Beam Details

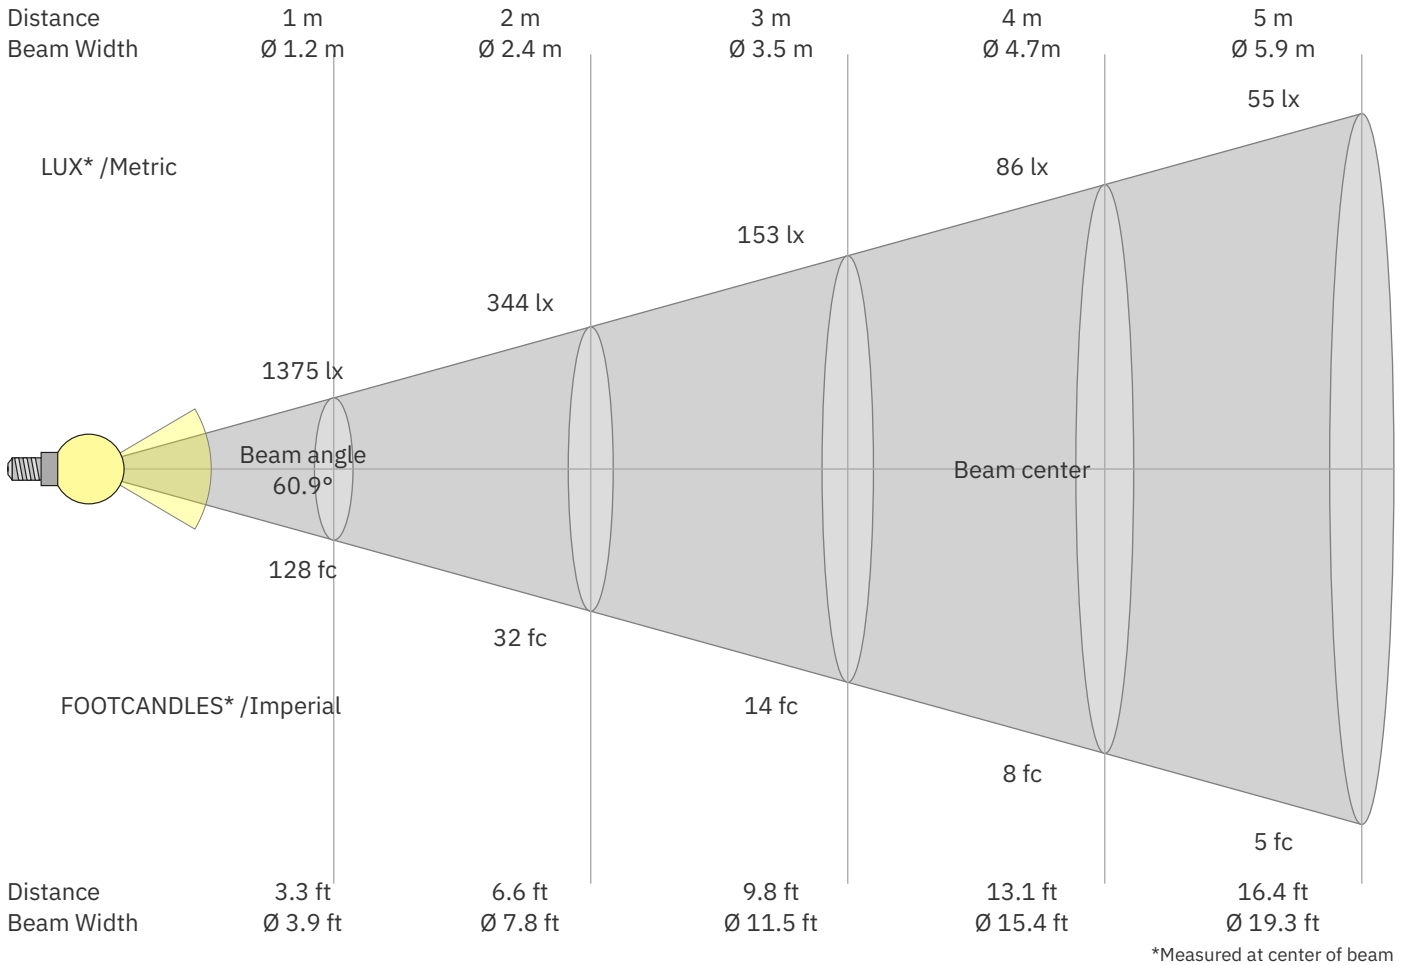

Beam intensities from 1 – 20 m

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | m |
|-------|------|------|------|------|------|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|-----|
| 3.3 | 6.6 | 9.8 | 13.1 | 16.4 | 19.7 | 23 | 26.2 | 29.5 | 32.8 | 36.1 | 39.4 | 42.7 | 45.9 | 49.2 | 52.5 | 55.8 | 59.1 | 62.3 | 65.6 | ft |
| 1375 | 344 | 153 | 86 | 55 | 38 | 28 | 21 | 17 | 14 | 11 | 10 | 8 | 7 | 6 | 5 | 5 | 4 | 4 | 3 | lux |
| 127.7 | 31.9 | 14.2 | 8 | 5.1 | 3.5 | 2.6 | 2 | 1.6 | 1.3 | 1.1 | 0.9 | 0.8 | 0.7 | 0.6 | 0.5 | 0.4 | 0.4 | 0.4 | 0.3 | fc |

Intensities in 0° c-plane

| 0° | 2° | 4° | 6° | 8° | 10° | 12° | 14° | 16° | 18° | 20° | 22° | 24° | 26° | 28° | 30° | 32° | 34° | 36° | 38° | γ |
|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1375 | 1371 | 1361 | 1344 | 1320 | 1290 | 1252 | 1210 | 1161 | 1107 | 1049 | 986 | 920 | 850 | 778 | 704 | 634 | 563 | 490 | 416 | cd |
| 100% | 100% | 99% | 98% | 96% | 94% | 91% | 88% | 84% | 81% | 76% | 72% | 67% | 62% | 57% | 51% | 46% | 41% | 36% | 30% | of 0°val |

Intensities in 90° c-plane

| 0° | 2° | 4° | 6° | 8° | 10° | 12° | 14° | 16° | 18° | 20° | 22° | 24° | 26° | 28° | 30° | 32° | 34° | 36° | 38° | γ |
|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1375 | 1371 | 1361 | 1344 | 1320 | 1290 | 1252 | 1210 | 1161 | 1107 | 1049 | 986 | 920 | 850 | 778 | 704 | 634 | 563 | 490 | 416 | cd |
| 100% | 100% | 99% | 98% | 96% | 94% | 91% | 88% | 84% | 81% | 76% | 72% | 67% | 62% | 57% | 51% | 46% | 41% | 36% | 30% | of 0°val |

Intensities in 180° c-plane

| 0° | 2° | 4° | 6° | 8° | 10° | 12° | 14° | 16° | 18° | 20° | 22° | 24° | 26° | 28° | 30° | 32° | 34° | 36° | 38° | γ |
|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1375 | 1371 | 1361 | 1344 | 1320 | 1290 | 1252 | 1210 | 1161 | 1107 | 1049 | 986 | 920 | 850 | 778 | 704 | 634 | 563 | 490 | 416 | cd |
| 100% | 100% | 99% | 98% | 96% | 94% | 91% | 88% | 84% | 81% | 76% | 72% | 67% | 62% | 57% | 51% | 46% | 41% | 36% | 30% | of 0°val |

Intensities in 270° c-plane

| 0° | 2° | 4° | 6° | 8° | 10° | 12° | 14° | 16° | 18° | 20° | 22° | 24° | 26° | 28° | 30° | 32° | 34° | 36° | 38° | γ |
|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 1375 | 1371 | 1361 | 1344 | 1320 | 1290 | 1252 | 1210 | 1161 | 1107 | 1049 | 986 | 920 | 850 | 778 | 704 | 634 | 563 | 490 | 416 | cd |
| 100% | 100% | 99% | 98% | 96% | 94% | 91% | 88% | 84% | 81% | 76% | 72% | 67% | 62% | 57% | 51% | 46% | 41% | 36% | 30% | of 0°val |



136-115 Reflector downlight eco | white | Ø145mm | 10/15W | 3-CCT

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

| Reflectances | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
|-------------------------------------|-----|--|------|------|------|------|--|------|------|------|------|
| ρ Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| ρ Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| ρ Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room size | | Viewed Crosswise | | | | | Viewed Endwise | | | | |
| H = mounting height above eye level | | (Viewing direction orthogonal to lamp length axis) | | | | | (Viewing direction parallel to lamp length axis) | | | | |
| X | Y | | | | | | | | | | |
| 2H | 2H | 20.9 | 21.6 | 21.0 | 21.8 | 22.0 | 20.9 | 21.6 | 21.0 | 21.8 | 22.0 |
| | 3H | 20.6 | 21.4 | 21.0 | 21.6 | 21.8 | 20.6 | 21.4 | 21.0 | 21.6 | 21.8 |
| | 4H | 20.5 | 21.3 | 20.9 | 21.6 | 21.8 | 20.5 | 21.3 | 20.9 | 21.6 | 21.8 |
| | 6H | 20.5 | 21.2 | 20.8 | 21.5 | 21.8 | 20.5 | 21.2 | 20.8 | 21.5 | 21.8 |
| | 8H | 20.5 | 21.1 | 20.8 | 21.4 | 21.8 | 20.5 | 21.1 | 20.8 | 21.4 | 21.8 |
| | 12H | 20.4 | 21.0 | 20.8 | 21.4 | 21.8 | 20.4 | 21.0 | 20.8 | 21.4 | 21.8 |
| 4H | 2H | 20.5 | 21.3 | 20.9 | 21.6 | 21.8 | 20.5 | 21.3 | 20.9 | 21.6 | 21.8 |
| | 3H | 20.4 | 21.0 | 20.8 | 21.4 | 21.8 | 20.4 | 21.0 | 20.8 | 21.4 | 21.8 |
| | 4H | 20.3 | 20.8 | 20.7 | 21.3 | 21.8 | 20.3 | 20.8 | 20.7 | 21.3 | 21.8 |
| | 6H | 20.2 | 20.8 | 20.7 | 21.1 | 21.5 | 20.2 | 20.8 | 20.7 | 21.1 | 21.5 |
| | 8H | 20.2 | 20.7 | 20.7 | 21.0 | 21.4 | 20.2 | 20.7 | 20.7 | 21.0 | 21.4 |
| | 12H | 20.1 | 20.5 | 20.6 | 20.9 | 21.4 | 20.1 | 20.5 | 20.6 | 20.9 | 21.4 |
| 8H | 4H | 20.2 | 20.7 | 20.7 | 21.0 | 21.4 | 20.2 | 20.7 | 20.7 | 21.0 | 21.4 |
| | 6H | 20.1 | 20.5 | 20.6 | 20.9 | 21.5 | 20.1 | 20.5 | 20.6 | 20.9 | 21.5 |
| | 8H | 20.1 | 20.4 | 20.6 | 20.9 | 21.5 | 20.1 | 20.4 | 20.6 | 20.9 | 21.5 |
| | 12H | 20.0 | 20.3 | 20.6 | 20.8 | 21.4 | 20.0 | 20.3 | 20.6 | 20.8 | 21.4 |
| 12H | 4H | 20.1 | 20.5 | 20.6 | 20.9 | 21.4 | 20.1 | 20.5 | 20.6 | 20.9 | 21.4 |
| | 6H | 20.1 | 20.4 | 20.6 | 20.9 | 21.5 | 20.1 | 20.4 | 20.6 | 20.9 | 21.5 |
| | 8H | 20.0 | 20.3 | 20.6 | 20.8 | 21.4 | 20.0 | 20.3 | 20.6 | 20.8 | 21.4 |

Variations with the observer position for the luminaire spacings. S:

| | | |
|----------|-------------|-------------|
| S = 1.0H | 3.6 / -14.2 | 3.6 / -14.2 |
| S = 1.5H | 6.0 / -15.6 | 6.0 / -15.6 |
| S = 2.0H | 8.0 / -16.1 | 8.0 / -16.1 |

Coefficients of Utilization

| Ceiling reflectance | 80 | 70 | | | 50 | | | 30 | | | 10 | | | 0 | | |
|---------------------|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| Wall reflectance | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| Floor reflectance | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 0 | |
| RCR | (RCR: Room Cavity Ratio) | | | | | | | | | | | | | | | |
| | Room Values are expressed as percentage of Lumen delivered to the task surface | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | |
| 1 | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 100 | 99 | 98 | 97 | |
| 2 | 107 | 102 | 98 | 95 | 105 | 101 | 97 | 94 | 97 | 94 | 91 | 94 | 92 | 90 | 92 | |
| 3 | 102 | 95 | 90 | 86 | 100 | 94 | 89 | 85 | 91 | 87 | 84 | 88 | 85 | 82 | 86 | |
| 4 | 96 | 88 | 83 | 78 | 94 | 87 | 82 | 78 | 85 | 80 | 77 | 83 | 79 | 76 | 81 | |
| 5 | 91 | 82 | 76 | 72 | 89 | 81 | 76 | 71 | 79 | 74 | 71 | 78 | 73 | 70 | 76 | |
| 6 | 86 | 77 | 71 | 66 | 85 | 76 | 70 | 66 | 74 | 69 | 65 | 73 | 68 | 65 | 72 | |
| 7 | 82 | 72 | 66 | 61 | 80 | 71 | 65 | 61 | 70 | 65 | 61 | 69 | 64 | 60 | 67 | |
| 8 | 77 | 67 | 61 | 57 | 76 | 67 | 61 | 57 | 66 | 60 | 56 | 65 | 60 | 56 | 64 | |
| 9 | 73 | 63 | 57 | 53 | 72 | 63 | 57 | 53 | 62 | 56 | 53 | 61 | 56 | 52 | 60 | |
| 10 | 70 | 60 | 54 | 50 | 69 | 59 | 53 | 49 | 58 | 53 | 49 | 58 | 53 | 49 | 57 | |