

**Giotto LED 335**  
*GIOTTO 335 3000K SURFACE 1-10V EMERGENCY*  
**3034821**



## Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 2225lm, 21.6W, 104lm/W, 3000K, CRI 80, 1-10V dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.




## PRODUCT OVERVIEW

Product name	GIOTTO 335 3000K SURFACE 1-10V EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	2225
Fixture luminous flux (lm)	2225
Luminous flux (lm)	2225
Luminaire efficacy (lm/W)	104
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	144
Luminous flux (emergency) (lm)	144
Total power consumption (W)	21.6
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10

Giotto LED 335  
GIOTTO 335 3000K SURFACE 1-10V EMERGENCY  
3034821

Product EAN number 8711971348214

PHOTOMETRY

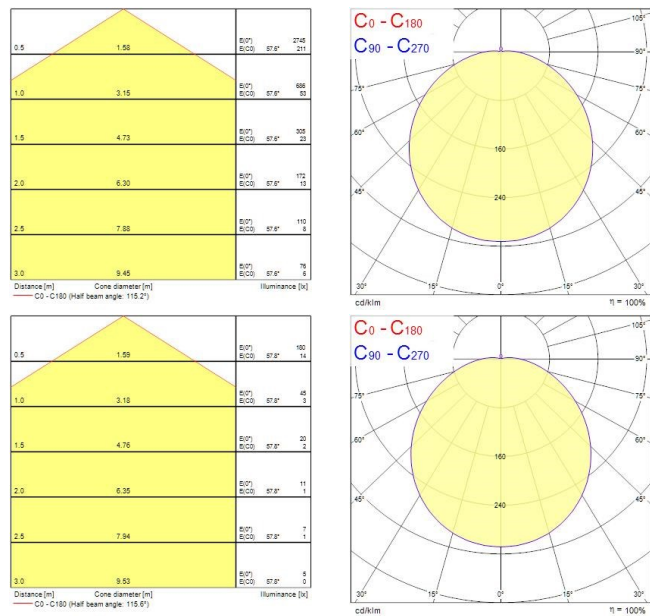

TECHNICAL DRAWINGS

