

## Twofold faceplate, vertical 71 mm centre distance, for a single switch and one 45x45 function, Niko Rocker steel champagne coated


**166-56855**



The Niko Rocker twofold vertically oriented faceplate clicks onto a single switch and one 45 x 45 mm function that have been vertically installed on top of each other with a centre distance of 71 mm. The faceplate combines with any available Niko Rocker single switch function and a Niko 45 x 45 mm function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 2 mm thick and the lower frame 6 mm.

Niko recommends a design combination with a finishing set in the following colour: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

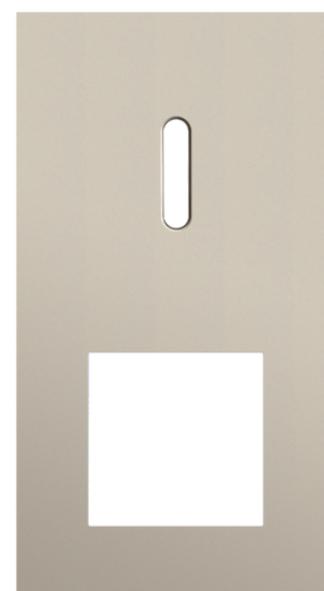

### Technical data

Twofold faceplate, vertical 71 mm centre distance, for a single switch and one 45x45 function, Niko Rocker steel champagne coated.

- Double faceplate for two switches.
- Colour faceplate: steel champagne coated
- Colour RAL (approximately): 080 70 10
- Colour NCS (approximately): NCS S 4005-Y20R
- Recommended colour central plate: steel champagne coated for Niko Rocker and Niko Toggle finishing sets and champagne coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upper frame is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-

acrylate (ASA).

- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upperframe is enamelled champagne
- Coating lower frame: enamelled champagne
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm
- Marking: EU