



PHOTOMETRIC LIGHT REPORT

**LED strip | COB 480LED/m
| 15W/m | IP20 | 6500K |
CRI>90**

Article number: 127-160



Go to the
webshop
of Tronix
Lighting



TRONIX



127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 127-160. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 127-160 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 127-160 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.

127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	1°
Test Distance	1.14 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	16.4 W – PF 1.0 – DPF 0.7
Frequency of Input Power	0 Hz
Warm-up Time and Variation	n/a – n/a%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 127-160
Product Description	LED strip COB 480LED/m 15W/m IP20 6500K CRI>90

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	1694 lm – 0.01% / 99.99%
Efficiency	104 lm/W
Energy efficiency class	F
Peak Intensity and Beam Angle	392 cd – 159.7°
Correlated Colour Temperature	CCT = 7069 K
Colour Shift. CIE duv	Duv 0.0011
Colour Rendering Index	CRI 92.8
Colour Rendering TM30-18	R _f 89.5 – R _g 98.8
Television Lighting Consistency Index	TLCI = 95
Flicker	SVM n/a – PstLM n/a



127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Electrical measurement details

Input Power


RMS Input voltage feed. V_{RMS}	24.0 V
RMS Input current feed. I_{RMS}	0.681 A
Total input power	16.4 W

Frequency of input power	0 Hz
Power factor	1.0
Displacement power factor	0.7


Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input Power Curve

Voltage - Current




Efficiency



Harmonics

3rd Harmonic	n/a
5th Harmonic	n/a
7th Harmonic	n/a
9th Harmonic	n/a
11th Harmonic	n/a

Current Harmonics %

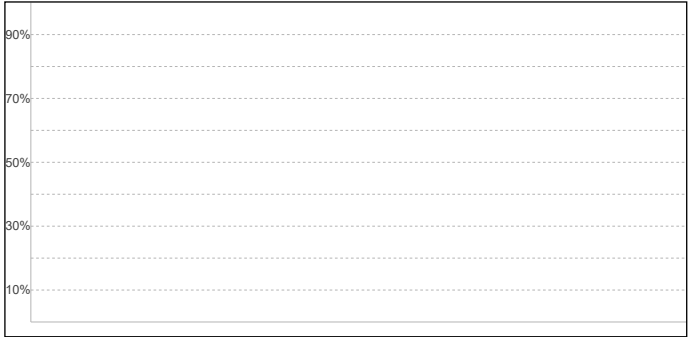

Stabilization Details

Warm-up Conditions

Stable period	n/a
Stable change max	n/a%
Minimum warm-up time	n/a

Colour temperature change during warm-up

n/a	CCT start	n/a K
n/a%	CCT shift	n/a K
n/a	CCT end	7069 K

Warm-up Results

Total warmup time	n/a
Warmup variation	n/a%

Output intensity change during warm-up

n/a	Output start	n/a lm
n/a%	Output change	n/a lm
	Output end	1694 lm


127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Colour measurement details


Total lumen output 1694 lm
 Correlated Colour Temperature 7069 K
 Colour coordinates CIE 1931 (x;y) = (0.305;0.317)
 Colour deviation from BBL Duv = 0.0011

TM30-18 Colour Fidelity Index R_f 89.5
 TM30-18 Colour Gamut Index R_g 98.8
 Colour Rendering Index (Ra) CRI 92.8
 Colour Rendering Index. (red component) $R_9 = 71.5$


Colour Quality Scale CQS = 89.7
 Television Lighting Consistency Index TLCI = 95

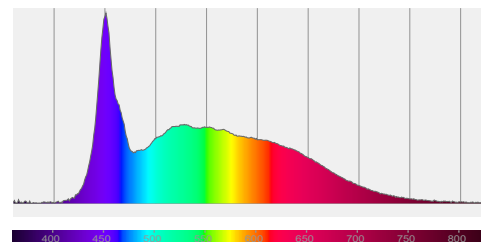

Relative spectral power distribution

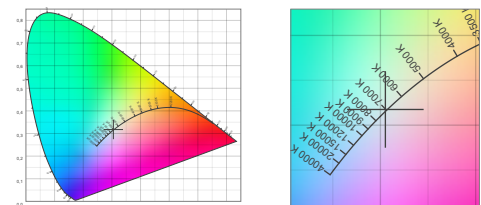

TM30 details

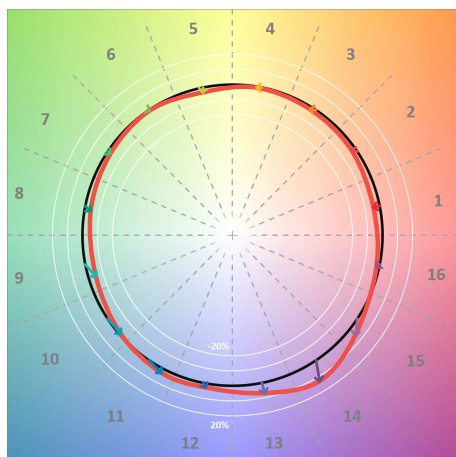


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	89	-4%	0%
C2	93	-3%	3%
C3	91	-2%	4%
C4	92	-1%	3%
C5	90	-3%	1%
C6	95	-1%	0%
C7	96	-2%	0%
C8	91	-4%	3%
C9	88	-6%	9%
C10	82	-2%	13%
C11	77	2%	12%
C12	92	3%	2%
C13	92	7%	1%
C14	84	13%	-6%
C15	85	5%	-10%
C16	94	-2%	-2%

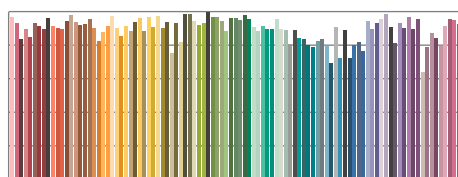

TM30-18 R_f -values per reference colour

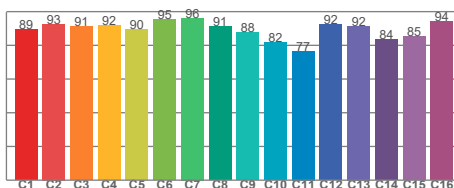


TM30-18 R_f -values per hue bin

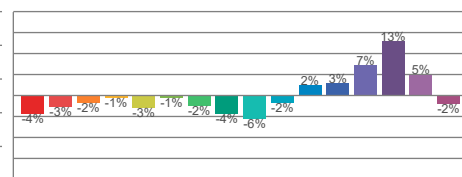


TM30 Chroma shift

Colour Quality details

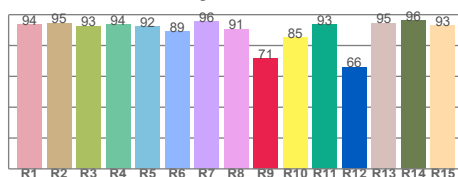

Colour Rendering Index

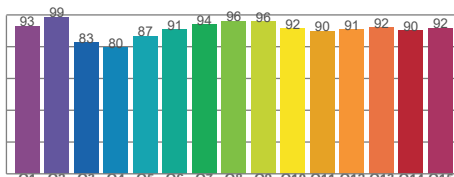

Colour Quality Scale

127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	n/a samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency	n/a Hz
Percent flicker	n/a %
Flicker index	n/a

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)

An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value ($F < 80$ Hz)	n/a
SVM value ($80 < F < 2000$ Hz)	n/a

Flicker frame (one flicker period in time domain)



Flicker FFT (flicker curve in frequency domain)



IEEE 1789-2015 Lighting Flicker Risk Zones




Document revision date: 1-7-2025 Measurement serial: VFR-250204-2326-MS

127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

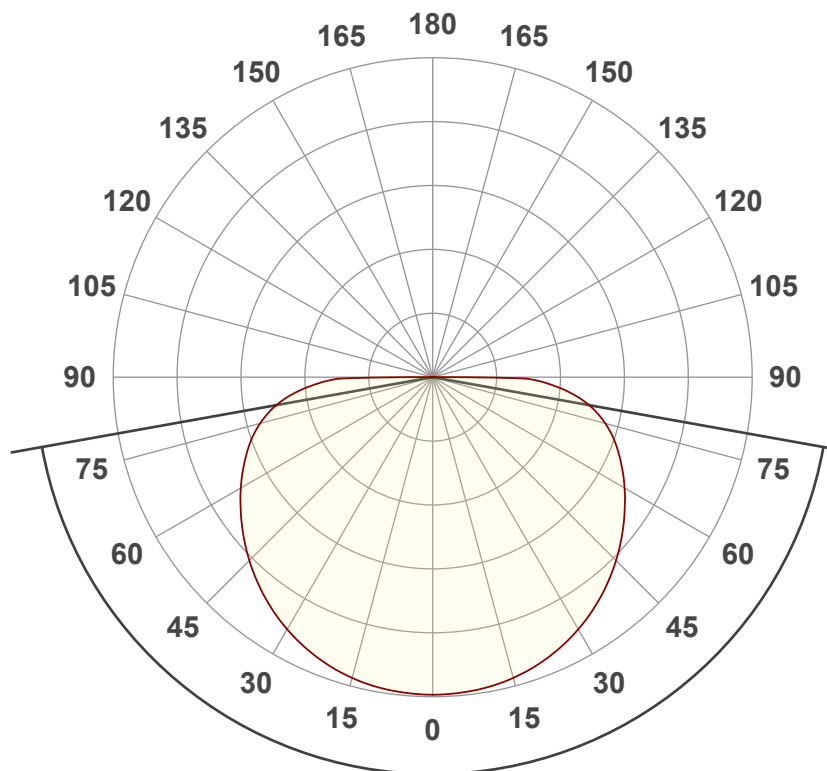

159,7°

Main Values

Output (total Lumen)	1694 lm
Lumen Up/Down	0.01% / 99.99%
Peak Intensity	392 cd
Beam Angle (50%)	159.7°
Beam Angle (90%)	159.7°
Beam Angle (10%)	159.7°

Cut-off Angle

Average 2.5%	180.1°
--------------	--------

Field Angle

Average 10%	179.9°
-------------	--------


Intensity Ratio

In 120° cone	61.4%
In 90° cone	38.7%

C planes

C000-C180
C090-C270


Linear distribution diagram - Intensity (candela) vs γ-angle

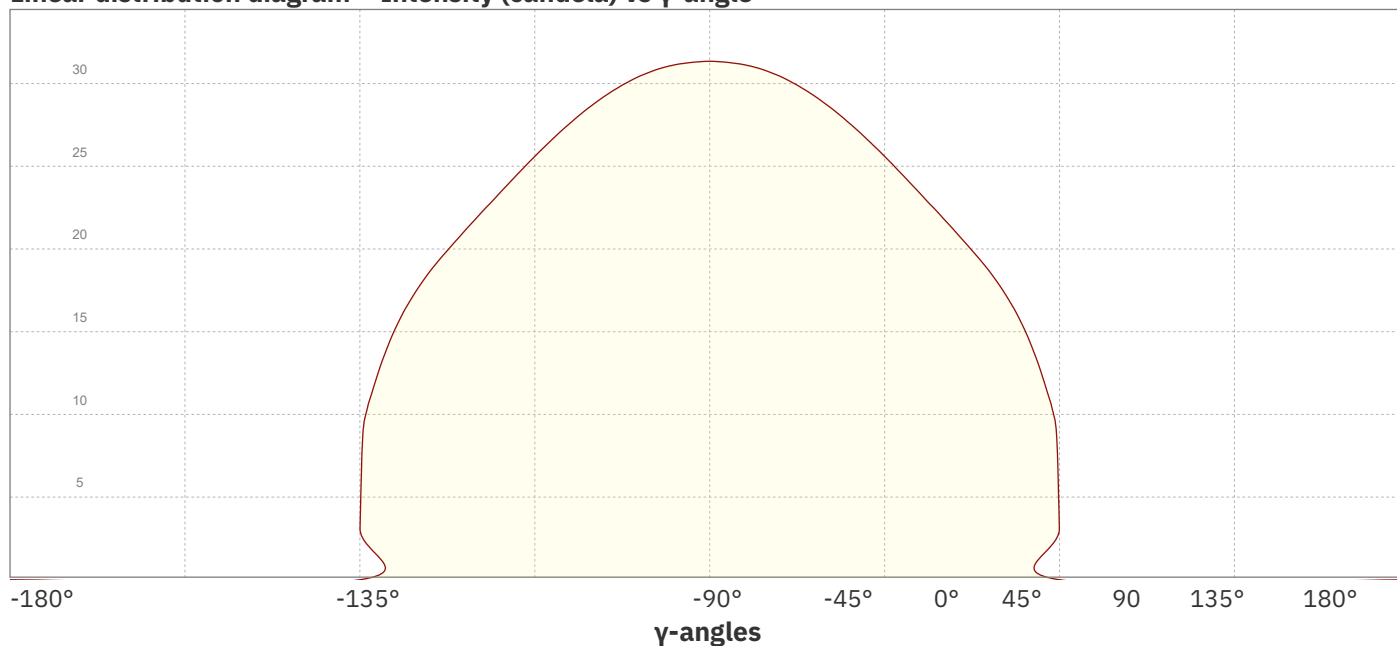

Document revision date: 1-7-2025 Measurement serial: VFR-250204-2326-MS

127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Beam Details

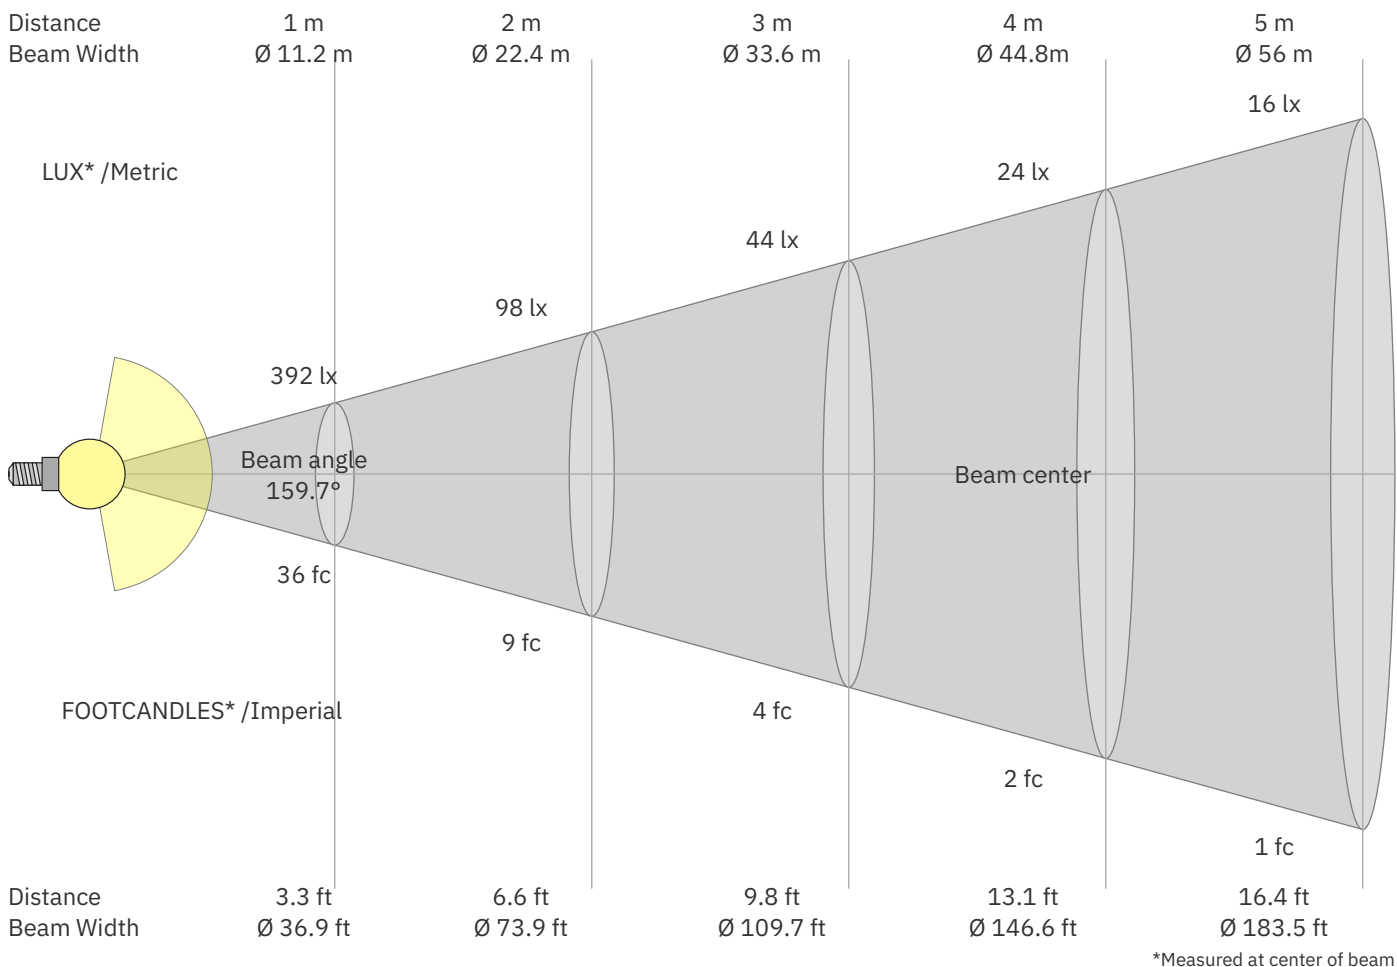

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
392	98	44	24	16	11	8	6	5	4	3	3	2	2	2	2	1	1	1	1	lux
36.4	9.1	4	2.3	1.5	1	0.7	0.6	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
392	391	388	384	378	369	359	347	334	320	305	289	273	257	240	221	195	159	25	0	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	82%	78%	74%	70%	66%	61%	56%	50%	41%	6%	0%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
392	391	388	384	378	369	359	347	334	320	305	289	273	257	240	221	195	159	25	0	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	82%	78%	74%	70%	66%	61%	56%	50%	41%	6%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
392	391	388	384	378	369	359	347	334	320	305	289	273	257	240	221	195	159	25	0	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	82%	78%	74%	70%	66%	61%	56%	50%	41%	6%	0%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
392	391	388	384	378	369	359	347	334	320	305	289	273	257	240	221	195	159	25	0	cd
100%	100%	99%	98%	96%	94%	92%	89%	85%	82%	78%	74%	70%	66%	61%	56%	50%	41%	6%	0%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250204-2326-MS

127-160 LED strip | COB 480LED/m | 15W/m | IP20 | 6500K | CRI>90

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	25.9	27.3	26.2	27.7	27.9	27.9	29.4	28.2	29.7	30.0
	3H	27.8	29.3	28.2	29.6	29.8	30.6	32.1	31.0	32.4	32.6
	4H	28.8	30.3	29.2	30.5	30.8	32.0	33.5	32.4	33.8	34.0
	6H	29.8	31.1	30.1	31.4	31.8	33.6	34.9	34.0	35.2	35.6
	8H	30.2	31.5	30.5	31.7	32.2	34.4	35.7	34.8	36.0	36.4
	12H	30.5	31.8	30.9	32.1	32.5	35.2	36.5	35.6	36.8	37.3
4H	2H	26.8	28.3	27.3	28.6	28.8	28.4	29.8	28.8	30.1	30.4
	3H	29.1	30.3	29.4	30.6	31.1	31.3	32.5	31.6	32.8	33.3
	4H	30.1	31.2	30.5	31.7	32.2	32.7	33.9	33.2	34.3	34.9
	6H	31.1	32.2	31.6	32.6	33.0	34.4	35.5	34.9	35.9	36.3
	8H	31.6	32.6	32.1	33.0	33.4	35.3	36.3	35.8	36.7	37.1
	12H	32.0	32.9	32.5	33.3	33.8	36.2	37.1	36.7	37.5	38.0
8H	4H	30.7	31.7	31.2	32.1	32.5	33.0	34.0	33.5	34.4	34.8
	6H	32.0	32.8	32.5	33.3	33.8	34.8	35.6	35.3	36.1	36.7
	8H	32.6	33.3	33.1	33.9	34.5	35.8	36.5	36.3	37.0	37.7
	12H	33.1	33.8	33.7	34.3	34.9	36.8	37.5	37.4	38.0	38.6
12H	4H	30.9	31.7	31.4	32.2	32.7	33.0	33.9	33.5	34.3	34.8
	6H	32.2	33.0	32.7	33.5	34.1	34.9	35.6	35.4	36.2	36.8
	8H	32.9	33.5	33.5	34.0	34.7	35.9	36.5	36.5	37.0	37.7
Variations with the observer position for the luminaire spacings. S:											
S = 1.0H		0.1 / -0.1					0.1 / -0.1				
S = 1.5H		0.1 / -0.1					0.3 / -0.3				
S = 2.0H		0.2 / -0.2					0.6 / -0.5				

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)																	
	Room Values are expressed as percentage of Lumen delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	106	106	106	102	102	102	100	
1	104	97	91	86	101	95	89	84	90	86	82	86	83	79	83	79	77	74
2	93	82	73	66	90	80	72	65	76	70	64	73	67	62	70	65	61	58
3	83	71	61	53	81	69	60	52	66	58	51	63	56	50	60	54	49	47
4	76	62	51	43	73	60	51	43	58	49	42	55	48	42	53	46	41	39
5	69	55	44	37	67	53	44	36	51	43	36	49	41	35	47	40	35	33
6	64	49	39	31	62	48	38	31	46	37	31	44	36	31	42	36	30	28
7	59	44	34	27	57	43	34	27	41	33	27	40	32	27	38	32	27	24
8	55	40	31	24	53	39	30	24	38	30	24	36	29	24	35	29	24	21
9	51	37	28	22	50	36	27	22	35	27	21	34	26	21	32	26	21	19
10	48	34	25	19	46	33	25	19	32	24	19	31	24	19	30	24	19	17