


17PK-5008: Straight male adapter 50x6/4"

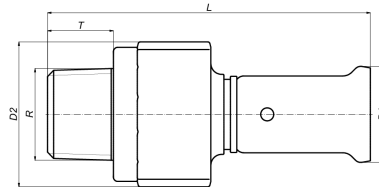

Commercial information

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Certificates

ATG, QB (CSTBat), DVGW Wasser, ETA, KIWA, ÖVGW Wasser, SINTEF, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, AFNOR, PZH, ACS, DNV-GL, Aenor, Sans 21003, RISE, EMI

Applications

Potable water, Heating, Compressed air, Cooling, Sanitary

Solutions

Building installations, Industry, Utility, Shipbuilding

Technical characteristics

| | | | |
|------------------------------------|---|----------------------------------|------------------------|
| Material connection 1 | Polyvinylidene fluoride (PVDF) | Bend angle | 0 Degrees |
| Material quality connection 1 | Polyvinylidene fluoride (PVDF) (expired) | Bend radius | 0 Millimetre |
| Surface protection connection 1 | Untreated | Outer pipe diameter connection 1 | 50 Millimetre |
| Surface treatment connection 1 | Untreated | Length | 119 Millimetre |
| Material connection 2 | Brass | Length of connection 1 | 71 Millimetre |
| Material quality connection 2 | CuZn40Pb2 (CW617N) | Working length connection 1 | 20 Millimetre |
| Surface protection connection 2 | Untreated | Length of connection 2 | 49 Millimetre |
| Surface treatment connection 2 | Untreated | Working length connection 2 | 28.5 Millimetre |
| Shape | Straight | Wrench width | 0 Millimetre |
| Reducing | ✗ | Wrench width union nut | 0 Millimetre |
| Eccentric | ✗ | Tightening moment | 0 0 Newtonmetre |
| System specific | ✓ | Medium temperature (continuous) | -10 70 Degrees celsius |
| Connection 1 | Press sleeve | Max. operating pressure at 20 °C | 10 Bar |
| Contour code connection 1 | BE | Standard Dimension Ratio (SDR) | 0 |
| Nominal diameter connection 2 | 1 1/2 inch (40) | | |
| Connection 2 | External thread conical BSPT-R (ISO 7-1 / EN 10226-1) | | |
| Main colour fitting | Black | | |
| Material sealing | Ethylene-propylene diene monomer rubber (EPDM) | | |
| With buffer stud | ✓ | | |
| High tensile strength | ✗ | | |
| With thermal insulation | ✗ | | |
| Ring stiffness class | Other | | |
| With sealing rings/gaskets | ✓ | | |
| Capped | ✗ | | |
| With connection indicator | ✗ | | |
| With drain valve | ✗ | | |
| With de-aerator | ✗ | | |
| FM quality mark | ✗ | | |
| LPCB quality mark | ✗ | | |
| ULC quality mark | ✗ | | |
| UL quality mark | ✗ | | |
| DIN-CERTCO certificate | ✗ | | |
| VdS quality mark | ✗ | | |
| With approval for TÜV | ✗ | | |
| DVGW quality mark for gas | ✗ | | |
| DVGW quality mark for water | ✓ | | |
| Certified according to NF 545 | ✗ | | |
| KIWA certified | ✓ | | |
| Gastec QA mark | ✗ | | |
| KOMO certified | ✓ | | |
| Type approval according to BBR/EKS | ✗ | | |

Related products

| Product code | GTIN | Description |
|--------------|----------------|--|
| BE50 | 05414764020221 | Henco Jaws (universal) BE-Profile 50x4 |

Image

