

136-049 10W 3000K specific configuration
Ceiling light | Ø280mm | 10/15W | 3-CCT | PIR

Introduction

Purpose of this Document

This document provides information for 136-049 10W 3000K. During measurement, the product is used in a different mode where output power, colour temperature and/or beam angle are changed from factory standard. These adjustments can be made without altering the product and are designed to be set by the installer. In most cases, the options are set through switches on the product.

Results

Total input power	10.2 W
Correlated Colour Temperature	2939 K
Total lumen output	1006 lm
Efficiency	99 lm/W


Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}	230 V
RMS Input current feed. I_{RMS}	0.050 A
Total input power	10.2 W
Frequency of input power	50 Hz
Power factor	0.88
Displacement power factor	0.94
Total harmonic distortion of the current	34.54%
Total harmonic distortion of the voltage	2.36%


Input Power Curve

Voltage - Current

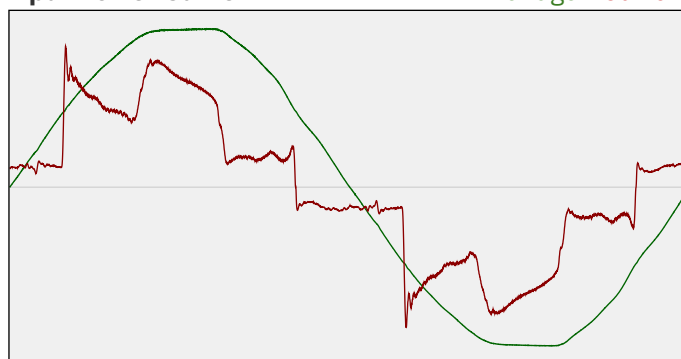

Efficiency

Radiated power efficiency: 31.0%




Lumen efficiency: 99 lm/W



Harmonics

3rd Harmonic	17.79%
5th Harmonic	6.14%
7th Harmonic	21.3%
9th Harmonic	6.5%
11th Harmonic	10.75%

Current Harmonics %

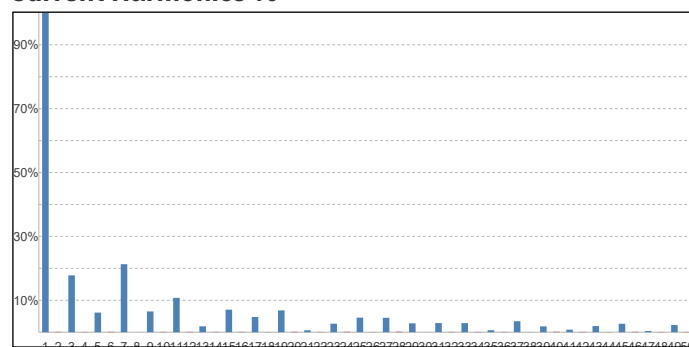


136-049 10W 3000K specific configuration

Colour measurement details


Total lumen output 1006 lm
 Correlated Colour Temperature 2939 K
 Colour coordinates CIE 1931 (x;y) = (0.435;0.393)
 Colour deviation from BBL Duv = -0.0041

TM30-18 Colour Fidelity Index R_f 84.3
 TM30-18 Colour Gamut Index R_g 99.0
 Colour Rendering Index (Ra) CRI 84.0
 Colour Rendering Index. (red component) $R_9 = 13.8$


Colour Quality Scale CQS = 81.7
 Television Lighting Consistency Index TLCI = 67

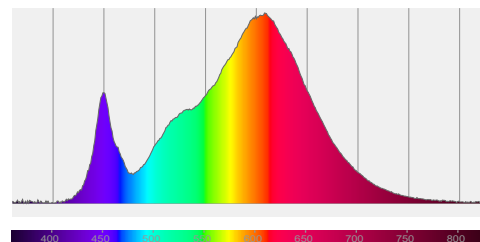

Relative spectral power distribution

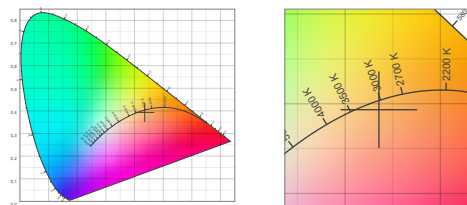

TM30 details

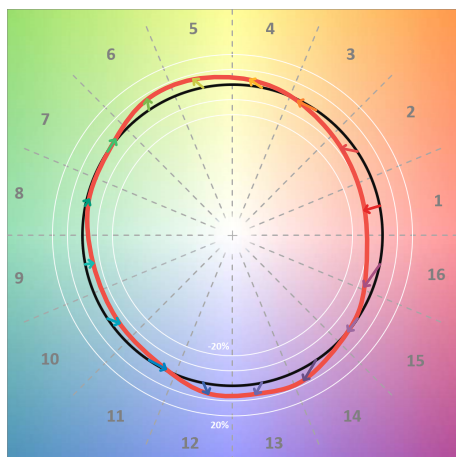


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	81	-10%	-1%
C2	81	-8%	8%
C3	75	-2%	13%
C4	86	4%	9%
C5	90	7%	5%
C6	89	7%	-3%
C7	85	0%	-9%
C8	92	-2%	-4%
C9	90	-5%	0%
C10	86	-5%	7%
C11	82	-1%	12%
C12	84	7%	5%
C13	88	7%	-5%
C14	81	7%	-14%
C15	84	-1%	-10%
C16	78	-7%	-16%

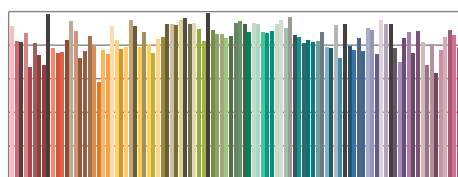

TM30-18 R_f -values per reference colour

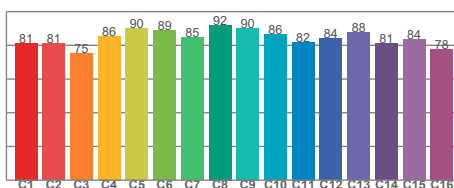


TM30-18 R_f -values per hue bin

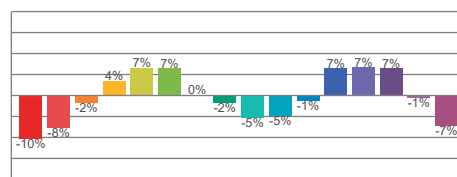


TM30 Chroma shift

Colour Quality details

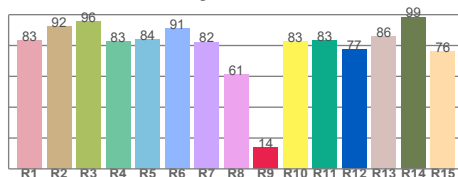

Colour Rendering Index

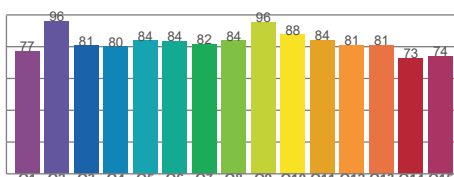

Colour Quality Scale