


## Data Sheet | Item Number: 787-2802

DC/DC Converter; 24 VDC input voltage; 10 VDC output voltage; 0.5 A output current; DC OK contact

<https://www.wago.com/787-2802>



DC OK	1	DC OK	5	n.c.
GND	2		6	n.c.
V <sub>out</sub> +	3	OUT	7	V <sub>in</sub> +
GND	4	IN	8	GND

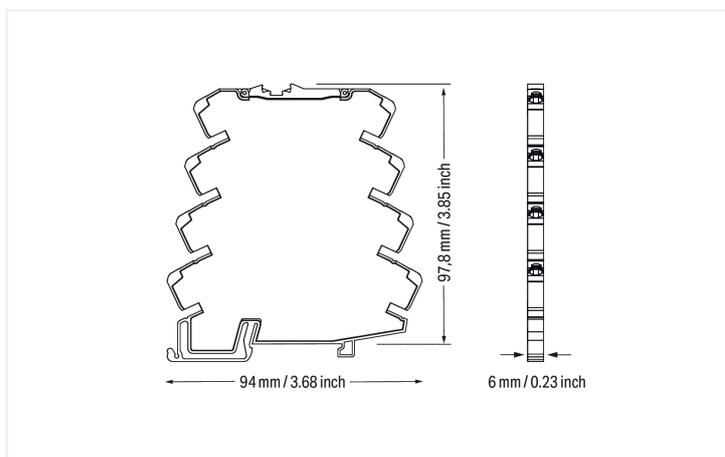

### Features:

- DC/DC converter in a compact 6 mm housing
- DC/DC converters (787-28xx) supply devices with 5, 10, 12 or 24 VDC from a 24 or 48 VDC power supply with an output power up to 12 W.
- Output voltage monitoring via DC OK signal output
- Can be commoned with 857 and 2857 Series devices
- Comprehensive range of approvals for multiple applications

### Technical data

#### Input

Nominal input voltage $U_{i, \text{nom}}$	24 VDC
Input voltage range	15 ... 30 VDC
Nominal mains frequency range	0 Hz
Input current $I_i$	$\leq 0.42$ A
Inrush current	$\leq 0.5$ A (at nominal input voltage)

#### Output

Nominal output voltage $U_{o, \text{nom}}$	10 VDC
Output voltage range	$\pm 2$ %
Nominal output current $I_{o, \text{nom}}$	0.5 A
Nominal output power	5 W
Deviation	$\leq 2$ %
Load regulation	$\leq 1$ %
Residual ripple	$\leq 20$ mV (peak-to-peak)

### Signaling and Communication

Signaling	1 x DC OK LED (green) 1 x Short circuit LED (red) 1 x Active signal output ( $U_r$ , max. 4 mA)
Operation status indicator	Green LED ( $U_o$ ) Red LED (short circuit)

### Efficiency/Power Losses

Power loss $P_I$	$\leq 0.19$ W; $\leq 0.7$ W (nominal load)
Efficiency (typ.)	89 % (at nominal input voltage and nominal output)

### Circuit Protection

Internal fuse	No
---------------	----

### Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	Yes
Resistance to reverse feed	$\leq 16$ VDC
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	No
MTBF	> 1,800,000 h

### Connection Data

Number of jumper slots	8
------------------------	---

#### Connection 1

Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	0.363 MJ
Weight	36 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	≤ 95 % (no condensation permissible)
Derating	No derating
Climatic category	3K3 (per EN 60721; except for low air pressure)

### Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 UL 61010-2-201

### Commercial data

PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143407069
Customs tariff number	85044083900

### Product Classification

UNSPSC	39121006
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

CAS-No.	1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	ce67853b-a327-4435-a15f-7e8b7a05bb28
SCIP notification number (Belgium)	a9ff99c9-4cac-4c9e-8c81-72a559df0d04
SCIP notification number (Bulgaria)	59d08204-c196-4538-9f66-1cb39f7bf0af
SCIP notification number (Czech Republic)	c0ec1c24-458c-411d-9012-061a533895da
SCIP notification number (Denmark)	b3d92ca7-f3c3-4f6c-8f21-dffe66b83525
SCIP notification number (Finland)	5e6ad7e9-0942-41c6-a9da-28b3343fbd4d
SCIP notification number (France)	bd6ecca3-a963-42c4-a754-c50c5b7e8be1
SCIP notification number (Germany)	c833769c-3814-44b5-a25d-dd261db33b06
SCIP notification number (Hungary)	83c5c8b3-ee6d-428f-9400-ca8b4666edee
SCIP notification number (Italy)	04280762-95a2-445c-9ac2-04755249d69d
SCIP notification number (Netherlands)	5102834b-552d-477c-ac82-90842191f952
SCIP notification number (Poland)	94ae0f57-3e3b-4a18-9eb8-069b2c40bd1b
SCIP notification number (Romania)	9b9145ff-794b-4db7-8977-6b29fee4ead2
SCIP notification number (Sweden)	12bb7370-a057-4c20-bb29-d2901042f6ca

**Approvals / Certificates**

**General approvals**



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199 Vol3 Sec1

**Declarations of conformity and manufacturer's declarations**

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search
Environmental Product Compliance 787-2802 <a href="#">↓</a>

**Documentation**

Bid Text			
787-2802	19.02.2019	xml 5.65 KB	<a href="#">↓</a>
787-2802	11.01.2016	doc 34.50 KB	<a href="#">↓</a>
787-2802	11.01.2016	docx 19.94 KB	<a href="#">↓</a>
787-2802	11.01.2016	pdf 89.71 KB	<a href="#">↓</a>

Instruction Leaflet			
DC/DC-Wandler	V 1.1.1 31.03.2020	pdf 2359.41 KB	<a href="#">↓</a>

**CAD/CAE-Data**

CAD data
2D/3D Models 787-2802 <a href="#">↓</a>

CAE data
EPLAN Data Portal 787-2802 <a href="#">↓</a>
WSCAD Universe 787-2802 <a href="#">↓</a>
ZUKEN Portal 787-2802 <a href="#">↓</a>

## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

##### 1.1.1.1 Marker



###### Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

###### Item No.: 793-502

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

###### Item No.: 793-566

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

###### Item No.: 793-503

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



###### Item No.: 793-504

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

###### Item No.: 793-505

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

###### Item No.: 793-506

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

###### Item No.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



###### Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

##### 1.1.1.2 Marking strip



###### Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.1.2 Tool

#### 1.1.2.1 Operating tool



###### Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured