


# Concord

## CONCORD BEACON MUSE TUNE SM DALI BLACK 2062912

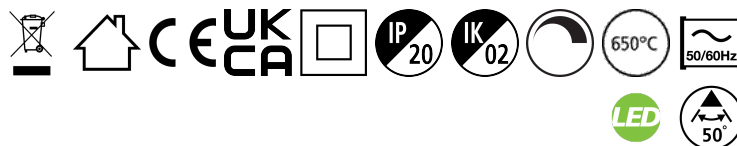

### Features

- Simple and slick integral design with no driver box and without any visible screws
- New technology utilization for improved performance
- Invisible in-track adaptor for an impressive architectural look
- Extremely precise light beams due to the high-quality lens
- #80mm die-cast aluminium body, Adjustable beam angle: between 10° - 50° , Textured black finishing colour
- Light color temperature: 2700 - 6500K, tunable white
- System power: 21W, Fixture lumen output: 235-760lm, efficacy: 36lm/W, Ra98 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation
- Operating voltage 220-240V / 50-60Hz, DALI dimmable
- Surface mounting with surface mounting base. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only
- Horizontal rotation: 355°, vertical tilt: 90°
- Nominal product dimensions: D.80mmx215mm
- 5 years warranty. Suitable for ceiling surface mounting, and wall surface mounting

### Product Overview


Product name	CONCORD BEACON MUSE TUNE SM DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Fixture rating	Enclosed
General application	Hospitality, Museums & Galleries, Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	235-760
Luminaire efficacy (lm/W)	36

# Concord

## CONCORD BEACON MUSE TUNE SM DALI BLACK 2062912

LOR (%)	100
Light colour	Tuneable White
CRI (Ra)	98
Colour Variation Initial (SDCM)	2
Beam Angle (°)	50
Photobiological Risk Group	RG1
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL9005
IP rating	IP20
IK rating	IK02
Product EAN number	5025768629121
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	760

### Photometry

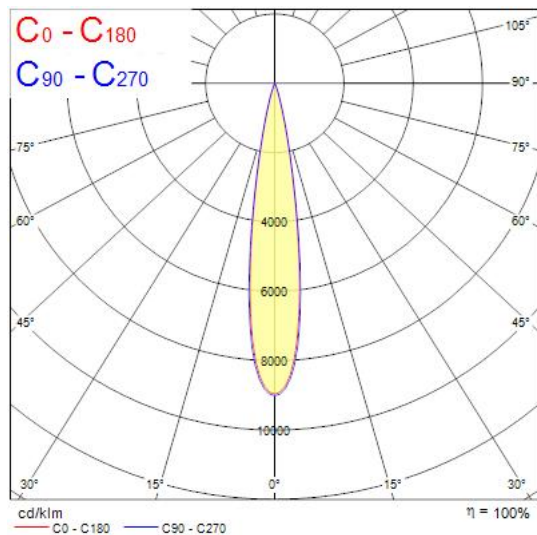

### Technical drawings

