


Data Sheet | Item Number: 267-422

Conductor support, base; with direct ground contact; with snap-in mounting feet; 7-pole; 2,50 mm²; white

<https://www.wago.com/267-422>

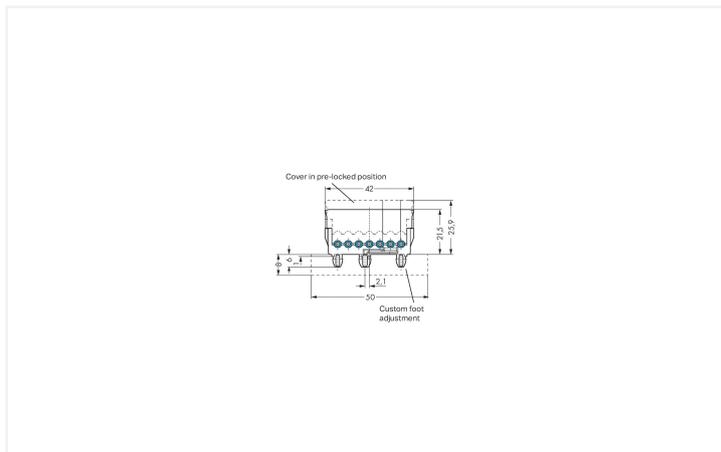

Color: ■ white

Dimensions in mm

Conductor support, 267 Series, IDC connection

Enjoy effortless electrical installations with conductor support (item number 267-422). Strip lengths must be 8 mm when connecting conductors to conductor support. This product incorporates one conductor terminal and utilizes an IDC connection. This product makes it easy to complete installations without having to disconnect or disturb cables thanks to convenient, insulation displacement connection technology (IDC technology). Conductor support is suitable for conductor cross sections ranging from 1.5 mm² to 2.5 mm².

Tin is used for coating the contact surfaces.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	6 A	-

Connection data

Number of connection types	1
Number of levels	1

Connection 1	
Connection technology	IDC connection
Solid conductor	1.5 ... 2.5 mm ²
Strip length	8 mm / 0.31 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.142 MJ
Weight	5.5 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4055143369510
Customs tariff number	39269097900

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-422



Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

