


PIXO LARGE FOOD VEGETABLE MB BLACK
0004601

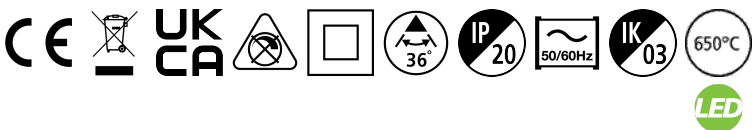

Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for VEGETABLE applications, the fruit and vegetable counter enhances the quality and genuineness of fresh products, bright tones highlight the colours of vegetables Die-cast aluminium body, Beam angle: 36° Textured black finishing colour Light color temperature: 5000K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 4300lm, efficacy: 108lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm 5 years warranty

Product Overview

Product name	PIXO LARGE FOOD VEGETABLE MB BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001744

PIXO LARGE FOOD VEGETABLE MB BLACK
0004601

Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	108
Correlated colour temperature (k)	5000
Light colour	N/A
CRI (Ra)	90
Colour Variation Initial (SDCM)	4
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288046013
Warranty	5 years
Dimming method	N/A
Useful luminous flux (#use)	4300

Technical drawings

