


Walraven Socket Head Bolt (BUP1000)

(K4554)

for threaded connections

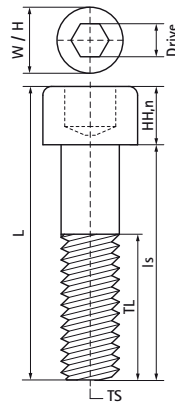

Features & benefits

- for tight space connections, like fixing in rail channels
- material: steel, strength class 8.8
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- according to DIN 912

Product Number	Thread Size	Screw Length	Thread Length	Head Shape	Nominal Head Height	Head Width	Key Driver Size	Total Width x Total Height x Total Length
Reference letter	TS	ls	TL		HH,n	HW	Drive	W x H x L
Unit description		mm	mm		mm	mm		mm x mm x mm
61380825	M8	25	21.25	Cylindrical Head	8	13	H6	13 x 13 x 33
61380860	M8	60	28	Cylindrical Head	8	13	H6	13 x 13 x 68
61380880	M8	80	28	Cylindrical Head	8	13	H6	13 x 13 x 88
61381025	M10	25	20.5	Cylindrical Head	10	16	H8	16 x 16 x 35
61381030	M10	30	25.5	Cylindrical Head	10	16	H8	16 x 16 x 40
61381230	M12	30	25.5	Cylindrical Head	12	18	H10	18 x 18 x 42
61381260	M12	60	36	Cylindrical Head	12	18	H10	18 x 18 x 72