


Data Sheet | Item Number: 267-519

Male connector with connect. for ground; without ground contact; 5-pole; white

<https://www.wago.com/267-519>

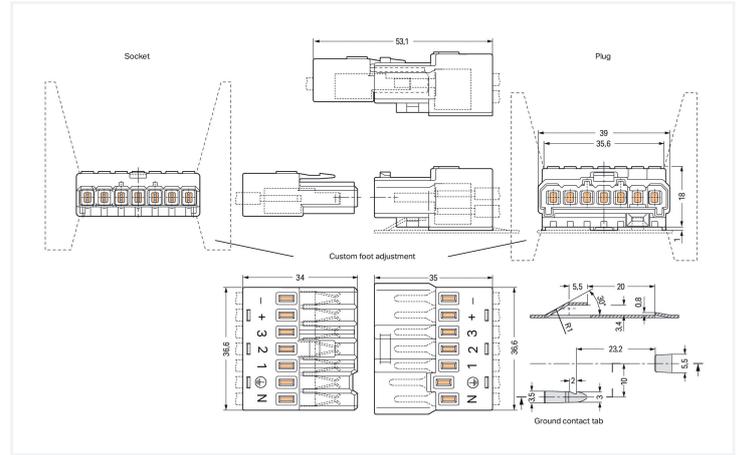

Color: ■ white

Similar to illustration

Dimensions in mm

Male connector, 267 Series, white

Seamless electrical installations are guaranteed with this male connector (item number 267-519).

Tin is used for coating the contact surfaces.

Electrical data

Ratings per	IEC/EN 61984		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Connection Data

Number of connection types	1
----------------------------	---

Connection 1	
Pole number	5

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.26 MJ
Weight	16.5 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454374921
Customs tariff number	85366990990

Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	2156138.01
CCA DEKRA Certification B.V.	IEC 61984	NL-47713
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 267-519



Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB



CAD/CAE-Data

CAD data

2D/3D Models 267-519



CAE data

ZUKEN Portal 267-519

