

Data Sheet | Item Number: 267-303


Conductor support; with direct ground contact; with snap-in mounting feet; 3-pole; 2,50 mm²; white

<https://www.wago.com/267-303>



Color: white

Similar to illustration

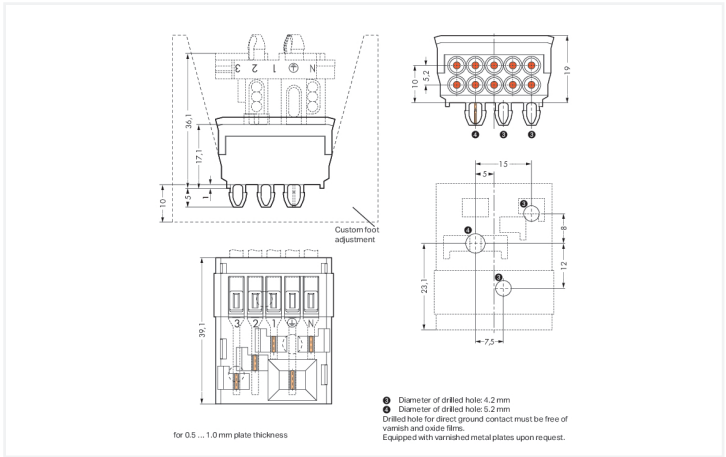

Dimensions in mm
3) Drilled hole diameter: 4.2 mm4) Drilled hole diameter: 5.2 mmDrilled hole for direct PE contact must be free of varnish and oxide films.Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Our conductor support (item number 267-303) ensures effortless electrical installations. Conductors can only be connected to conductor support if their strip length is between 11 and 12 mm . Depending on the conductor type, conductor support is suitable for conductor cross sections ranging from 0.5 mm² to 1 mm².

The contact surface is coated with tin.

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		-	500 V	-
Rated impulse withstand voltage		-	4 kV	-
Rated current		-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

Connection Data				
Number of connection types	1	Connection 1		
		Solid conductor	0.5 ... 1 mm²	
		Strip length	11 ... 12 mm / 0.43 ... 0.47 inches	
		Pole number	3	



Physical data	
Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.291 MJ
Weight	15.8 g

Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454415419
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121409
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-303			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 267-303		ZUKEN Portal 267-303	
			