
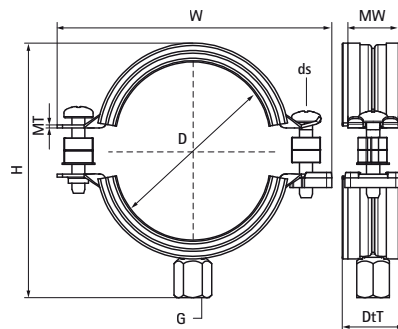


Walraven Bifix® 5000 G2 (BUP1000) (M8/M10)

(A2509)

for plastic pipes

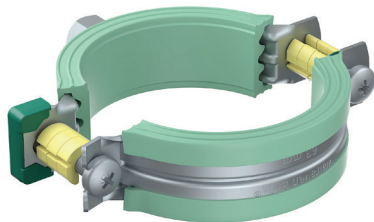

Features & benefits

- two-screw clamp
- with quick locking system
- with removable spacer washers, making the clamp suitable for either sliding or anchoring
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating lining according to DIN 4109

Product Number	Outside Pipe Diameter	Connection Thread	Total Width x Total Height x Total Depth	Material Width x Material Thickness	Screw Size	Maximum Allowed Load Faz
Reference letter	D	G	W x H x DtT	MW x MT	ds	Fa,z
Unit description	mm		mm x mm x mm	mm x mm		N
3188016	16	M8/M10	63 x 50 x 20	20 x 1.25	M6	600
3188020	20	M8/M10	68 x 54 x 20	20 x 1.25	M6	600
3188025	25	M8/M10	74 x 59 x 20	20 x 1.25	M6	600
3188032	32	M8/M10	80 x 61 x 20	20 x 1.25	M6	600
3188040	40	M8/M10	91 x 73 x 20	20 x 1.25	M6	600
3188050	50	M8/M10	97 x 84 x 20	20 x 1.25	M6	600
3188056	56	M8/M10	104 x 90 x 20	20 x 1.25	M6	600
3188058	58	M8/M10	109 x 91 x 20	20 x 1.25	M6	600
3188063	63	M8/M10	109 x 99 x 20	20 x 1.25	M6	600
3188075	75	M8/M10	125 x 109 x 20	20 x 1.5	M6	600
3188078	78	M8/M10	132 x 111 x 20	20 x 1.5	M6	600
3188090	90	M8/M10	142 x 128 x 23	23 x 2	M6	1,400
3188110	110	M8/M10	164 x 144 x 23	23 x 2	M6	1,400
3188125	125	M8/M10	181 x 159 x 23	23 x 2	M6	1,400
3188135	135	M8/M10	189 x 169 x 23	23 x 2	M6	1,400
3188160	160	M8/M10	225 x 203 x 25	25 x 2.5	M8	1,700
3188200	200	M10	269 x 237 x 30	25 x 2.5	M8	1,700