

Threefold faceplate, vertical 71 mm centre distance, for a double switch and two 45x45 functions, Niko Rocker steel white coated

154-56956



The Niko Rocker threefold vertically oriented faceplate clicks onto a double switch and two 45 x 45 mm functions that have been vertically installed on top of each other with a centre distance of 71 mm. The faceplate combines with any available Niko Rocker for double switch functions and Niko 45 x 45 mm finishing set. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upperframe is made of steel. The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated. The upper frame is 2 mm thick and the lower frame 6 mm.


Niko recommends a design combination with a finishing set in the following colour: steel white coated for Niko Rocker and Niko Toggle finishing sets and white coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

Technical data

Threefold faceplate, vertical 71 mm centre distance, for a double switch and two 45x45 functions, Niko Rocker steel white coated.

- Threefold faceplate for three switches.
- Colour faceplate: steel white coated
- Colour RAL (approximately): 000 90 00
- Colour NCS (approximately): NCS S 1002-B50G
- Recommended colour central plate: steel white coated for Niko Rocker and Niko Toggle finishing sets and white coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of steel. The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated.

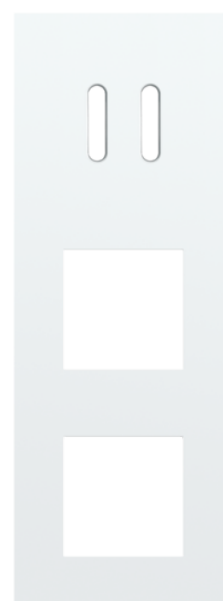

- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upper frame is enamelled white
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 225 mm x 83 mm x 13 mm
- Dimensions visible (HxWxD): 225 mm x 83 mm
- Marking: EU