

Twofold faceplate, vertical 71 mm centre distance, for a single switch and one 45x45 function, Niko Rocker steel white coated


154-56855



The Niko Rocker twofold vertically oriented faceplate clicks onto a single switch and one 45 x 45 mm function that have been vertically installed on top of each other with a centre distance of 71 mm. The faceplate combines with any available Niko Rocker single switch function and a Niko 45 x 45 mm function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upper frame is made of steel. The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated. The upper frame is 2 mm thick and the lower frame 6 mm.

Niko recommends a design combination with a finishing set in the following colour: steel white coated for Niko Rocker and Niko Toggle finishing sets and white coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

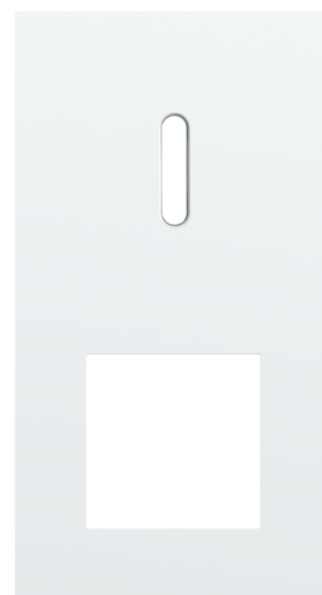

Technical data

Twofold faceplate, vertical 71 mm centre distance, for a single switch and one 45x45 function, Niko Rocker steel white coated.

- Double faceplate for two switches.
- Colour faceplate: steel white coated
- Colour RAL (approximately): 000 90 00
- Colour NCS (approximately): NCS S 1002-B50G
- Recommended colour central plate: steel white coated for Niko Rocker and Niko Toggle finishing sets and white coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upper frame is made of steel. The lower frame is made of white polycarbonate (PC) + acrylic-styrene-acrylate (ASA), white coated.

- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upper frame is enamelled white
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm
- Marking: EU