Data Sheet | Item Number: 267-313
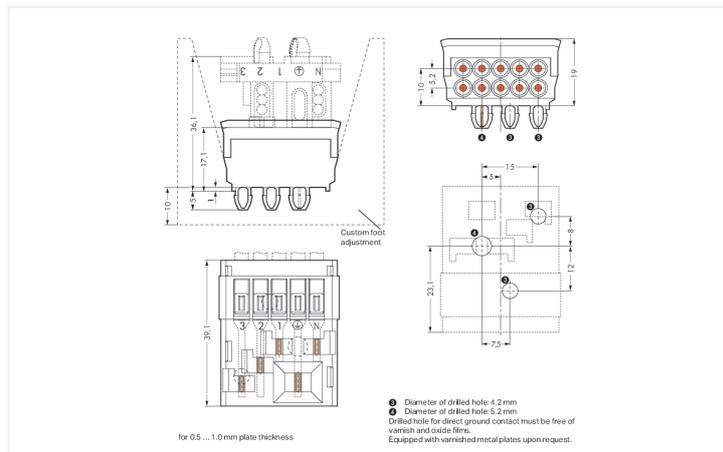
Conductor support; without ground contact; with snap-in mounting feet; 3-pole; 2,50 mm²; white

https://www.wago.com/267-313

WAGO

| Color: | white | | Similar to illustration |

Dimensions in mm
3) Drilled hole diameter: 4.2 mm4) Drilled hole diameter: 5.2 mmDrilled hole for direct PE contact must be free of varnish and oxide films.Equipped with varnished metal plates upon request.

Conductor support, 267 Series, white

Conductor support (item number 267-313) provides fault-free electrical installations. Conductors should only be connected to conductor support if their strip length is between 11 and 12 mm . Depending on the conductor type, conductor support is ideal for conductor cross sections ranging from 0.5 mm² to 1 mm².

The contact surface is coated with tin.

Electrical data

Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Ratings per IEC/EN 2	
Rated current	6 A

Connection data

Number of connection types	1

Connection 1	
Solid conductor	0.5 … 1 mm²
Strip length	11 … 12 mm / 0.43 … 0.47 inches
Pole number	3

Physical data

Width	39.1 mm / 1.539 inches
Height from the surface	19 mm / 0.748 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E_{Cu})
Contact Plating	Tin
Fire load	0.291 MJ
Weight	14.8 g

Environmental requirements

Temperature stability	105 °C

Commercial data

PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454415440
Customs tariff number	85366990990

Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizie-rungsinstitut	EN 61984	40032309

WAGO

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-313	↓

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓

CAD/CAE-Data

CAD data		**CAE data**	
2D/3D Models 267-313	↓	ZUKEN Portal 267-313	↓

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: www.wago.com