

52006600 Internal	DATA SHEET	
Valid from: 20.07.2026	SKINDICHT® BLK-M	


The SKINDICHT® BLK-M polystyrene blind plugs are used where unengaged threaded openings are to be closed.

Technical Features:

Connecting thread	M12x1.5 up to M63x1.5 acc. to DIN 60423
Material	Polystyrene, impact resistant
Temperature range	-25 °C up to +60 °C
Colour RAL	RAL 7035 light grey RAL 9005 black, on request
Protecting class	IP54 acc. to EN 60529
Flammability	According to UL94: HB



Norm references:

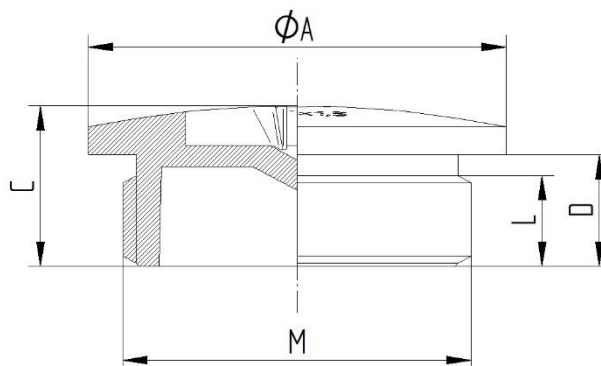

Thread M	Ø A mm	C mm	D mm	L mm	Part No.
M12x1,5	15	8,7	7	5,5	52006600
M16x1,5	20	9,8	7	5,5	52006610
M20x1,5	24	10,3	7	5,5	52006620
M25x1,5	30	11,3	8	6	52006630
M32x1,5	37	11,8	8	6	52006640
M40x1,5	46	12,7	8	6	52006650
M50x1,5	56	14,8	10	8	52006660
M63x1,5	70	16,8	12	10	52006670

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Jurak /PDP Released: DAMU1/PDP	Document: DB52006600EN Version: 06	Page 1 of 1
---	---------------------------------------	-------------