

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



LEGRAND'S ENVIRONMENTAL COMMITMENTS

• Incorporate environmental management into our industrial sites

Of all Legrand sites worldwide, over 85% are ISO 14001-certified (sites belonging to the Group for more than five years).

• Offer our customers environmentally friendly solutions

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.

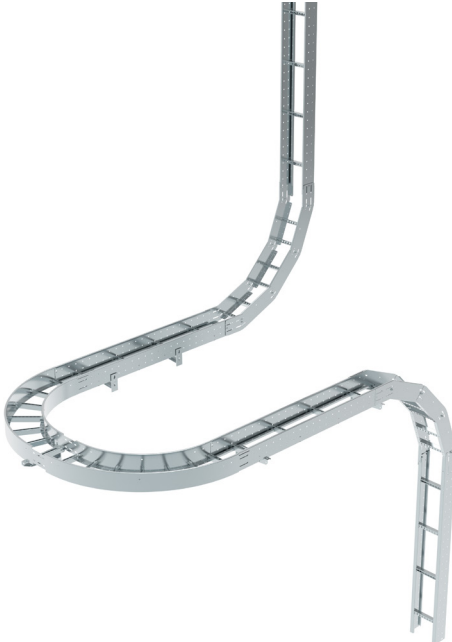
• Involve the environment in product design and provide informations in compliance with ISO 14025

Reduce the environmental impact of products over their whole life cycle.

Provide our customers with all relevant information (composition, consumption, end of life, etc.).



REFERENCE PRODUCT

Function	Support the wiring along 1 metre for a Reference Service Life of 20 years. The cable ladder system, capable of supporting a load of 120 kg per metre on a span of 2 m, includes the profile and cable management and support components typical of standard use.
Reference Product	
	Cat.Nos 8381532 - 8382552 - 8382512 - 350401 - 8383280 - 585367 - 557233 - 344872
	GLO4 100x200 cable ladder system - MD - HR finishing

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



PRODUCTS CONCERNED

The environmental data is representative of the following products:

Catalogue numbers

The whole offer of GLO4 cable ladder system, HR finishing, Medium Duty, present in the various catalogs - list of codes available upon request through our Technical Customer Service.

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market. It respects the restrictions on use of hazardous substances as defined in the RoHS directive 2011/65/EU amended by delegated directive (EU) 2015/863, and its amendment 2017/2102/EU.

Total weight of Reference Product	5,27 kg (all packaging included)
--	---

Product alone weight : 4,93 kg					
Plastics as % of weight		Metals as % of weight		Other as % of weight	
		Steel	93,6 %		
		Copper and copper alloys	<0,1 %		
		Aluminium	<0,1 %		

Packaging (alone) : 0,34 kg					
Polyethylene	<0,1 %			Wood	5,9 %
Polypropylene	<0,1 %			Cardboard	0,5 %
				Paper	<0,1 %

Total plastics : 0,00 kg	0,0 %	Total metals : 4,93 kg	93,6 %	Total others : 0,34 kg	6,4 %
---------------------------------	--------------	-------------------------------	---------------	-------------------------------	--------------

At the date of edition of this document, the content of recycled material(s) is :

- Product alone (excluding packaging): 20 % by mass
- Packaging only: 6 % by mass



■ MANUFACTURE

This Reference Product comes from a site that have received ISO 14001 certification.

The final assembly site is located in Boxtel, Netherlands.



■ DISTRIBUTION

Products are distributed from logistics centres located with a view to optimize transport efficiency. The Reference Product is therefore transported over an average distance of 92 km by road from our warehouse to the local point of distribution into the Dutch market.

Packaging is compliant with European directive 2004/12/EU concerning packaging and packaging waste.



■ INSTALLATION

For the installation of the product, only standard tools are needed.



■ USE

Under normal conditions of use, this product requires no servicing, no maintenance or additional products.

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



END OF LIFE

The product end of life factors are taken into account during the design phase. Dismantling and sorting of components or materials is made as easy as possible with a view to recycling or failing that, another form of reuse.



ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end of life. It is representative of Dutch marketed products.

The datasets collected in this PEP are representative of the year 2025.

For each phase, the following modelling elements were taken in account:

System Limit	Manufacture A1-A3	Materials and components of the product, all transport for the manufacturing, the packaging and the waste generated by the manufacturing.
	Distribution A4	Transport between the last Group distribution centre and an average delivery point in the sales area.
	Installation A5	The end of life of the packaging.
	Use B1-B7	- Product category: PSR-0003-ed2.1-EN-2023 12 08 - 3.3.1.1.2. Cable ladder systems - Use scenario: no energy consumption during the 20 years working life. This modelling duration does not constitute a minimum durability requirement. - Energy model: Electricity Mix_Low voltage_2020_Netherlands_NL
	End of life C1-C4	The end of life treatment scenario according to PSR-0003-ed2.1-EN-2023 12 08, paragraph 3.1.5.5.
D Module		Module D is calculated according to PCR-ed4-EN-2021 09 06 based on the materials recycled and the modelled end-of-life scenario. It expresses the net benefits and burdens beyond the boundaries of the system, and are not to be included in the life cycle totals.
Software and data-base used		EIME V6 and its CODDE-2024-04 database The set of indicators used is Indicators for PEF EF 3.1 (Compliance: PEP ed.4, EN15804+A2) v2.0

Unless otherwise indicated the modelling energetic mix are those integrated in the data modules used from the aforementioned database.

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



ENVIRONMENTAL IMPACTS

	Total Life Cycle		Manufacturing	Distribution	Installation	Use(*)			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
Climate change - total	3,11E+01	kg CO ₂ eq.	2,86E+01	2,42E-02	4,56E-02	0,00E+00	0,00E+00	0,00E+00	2,39E+00	3,95E+00
Climate change - fossil fuels	3,13E+01	kg CO ₂ eq.	2,88E+01	2,42E-02	3,91E-02	0,00E+00	0,00E+00	0,00E+00	2,38E+00	3,98E+00
Climate change - biogenics	-2,31E-01	kg CO ₂ eq.	-2,47E-01	0,00E+00	6,53E-03	0,00E+00	0,00E+00	0,00E+00	9,75E-03	-2,92E-02
Climate change - land use and land use transformation	2,55E-09	kg CO ₂ eq.	2,55E-09	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Ozone depletion	2,36E-06	kg CFC-11 eq.	2,10E-06	0*	4,09E-10	0,00E+00	0,00E+00	0,00E+00	2,55E-07	2,12E-09
Acidification (AP)	1,26E-01	mole of H ⁺ eq.	1,08E-01	1,53E-04	1,35E-04	0,00E+00	0,00E+00	0,00E+00	1,79E-02	1,40E-02
Freshwater eutrophication	1,97E-05	kg P eq.	1,61E-05	9,09E-09	3,95E-07	0,00E+00	0,00E+00	0,00E+00	3,21E-06	1,10E-06
Marine aquatic eutrophication	2,54E-02	kg of N eq.	2,08E-02	7,19E-05	6,58E-05	0,00E+00	0,00E+00	0,00E+00	4,49E-03	2,33E-03
Terrestrial eutrophication	2,88E-01	mole of N eq.	2,27E-01	7,89E-04	5,12E-04	0,00E+00	0,00E+00	0,00E+00	5,91E-02	2,53E-02
Photochemical ozone formation	9,14E-02	kg NMVOC eq.	7,83E-02	1,99E-04	1,26E-04	0,00E+00	0,00E+00	0,00E+00	1,28E-02	9,54E-03
Depletion of abiotic resources - elements	3,25E-05	kg Sb eq.	3,23E-05	0*	0*	0,00E+00	0,00E+00	0,00E+00	1,90E-07	2,89E-06
Depletion of abiotic resources - fossil fuels	1,42E+03	MJ	1,38E+03	3,38E-01	3,96E-01	0,00E+00	0,00E+00	0,00E+00	4,31E+01	3,16E+02
Water requirement	1,24E+01	m ³ deprivation worldwide eq.	1,21E+01	0*	2,31E-03	0,00E+00	0,00E+00	0,00E+00	2,92E-01	1,66E+00
Emission of fine particles	7,18E-07	incidence of diseases	5,96E-07	1,25E-09	8,95E-10	0,00E+00	0,00E+00	0,00E+00	1,20E-07	6,81E-08

(*) For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table
In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

Product Environmental Profile

GLO-4 LADDER MD-HR-100X200-RS 300



Total Life Cycle			Manufacturing	Distribution	Installation	Use(*)			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
Ionizing radiation, human health	3,13E+00	kBq of U235 eq.	2,21E+00	0*	4,46E-03	0,00E+00	0,00E+00	0,00E+00	9,10E-01	5,63E-01
Ecotoxicity (fresh water)	1,64E+02	CTUe	8,24E+01	0*	4,49E-01	0,00E+00	0,00E+00	0,00E+00	8,15E+01	2,48E+00
Human toxicity, carcinogenic effects	4,62E-08	CTUh	4,22E-08	0*	3,11E-09	0,00E+00	0,00E+00	0,00E+00	8,10E-10	4,01E-09
Human toxicity, non-carcinogenic effects	4,84E-07	CTUh	4,49E-07	0*	9,96E-11	0,00E+00	0,00E+00	0,00E+00	3,43E-08	3,92E-08
Impacts related to land use/soil quality	8,28E-01	-	7,39E-01	0,00E+00	0*	0,00E+00	0,00E+00	0,00E+00	8,92E-02	0,00E+00
Use of renewable primary energy, excluding renewable primary energy resources used as raw materials	9,09E+00	MJ	6,18E+00	0*	3,69E-02	0,00E+00	0,00E+00	0,00E+00	2,88E+00	-7,83E-02
Use of renewable primary energy resources used as raw materials	1,03E+01	MJ	1,03E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,77E-01
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	1,94E+01	MJ	1,65E+01	0*	3,69E-02	0,00E+00	0,00E+00	0,00E+00	2,88E+00	2,98E-01
Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials	1,42E+03	MJ	1,38E+03	3,38E-01	3,96E-01	0,00E+00	0,00E+00	0,00E+00	4,31E+01	3,16E+02
Use of non-renewable primary energy resources used as raw materials	1,28E+00	MJ	1,28E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	1,42E+03	MJ	1,38E+03	3,38E-01	3,96E-01	0,00E+00	0,00E+00	0,00E+00	4,31E+01	3,16E+02

(*) For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table

In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



Total Life Cycle			Manufacturing	Distribution	Installation	Use(*)			End of Life	Module D
			A1-A3	A4	A5	Total B1-B7	B2	B6	C1-C4	
Use of secondary materials	1,32E+00	kg	1,32E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels	0,00E+00	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels	0,00E+00	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net use of fresh water	2,89E-01	m³	2,81E-01	0*	5,37E-05	0,00E+00	0,00E+00	0,00E+00	7,95E-03	3,86E-02
Hazardous waste disposed of	5,09E+00	kg	7,63E-01	0,00E+00	6,96E-04	0,00E+00	0,00E+00	0,00E+00	4,33E+00	2,51E-01
Non-hazardous waste disposed of	9,94E+00	kg	9,41E+00	0*	1,60E-01	0,00E+00	0,00E+00	0,00E+00	3,67E-01	1,59E-02
Radioactive waste disposed of	6,80E-03	kg	6,64E-03	0*	2,18E-06	0,00E+00	0,00E+00	0,00E+00	1,53E-04	7,50E-06
Components for re-use	0,00E+00	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	1,26E+00	kg	1,26E+00	0,00E+00	3,53E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for energy recovery	2,63E-03	kg	0,00E+00	0,00E+00	2,63E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	0,00E+00	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of primary energy during the life cycle	1,44E+03	MJ	1,40E+03	3,39E-01	4,33E-01	0,00E+00	0,00E+00	0,00E+00	4,59E+01	3,16E+02
Biogenic carbon content of the product	0,00E+00	kg of C	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Biogenic carbon content of the associated packaging	2,30E-01	kg of C	2,30E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,93E-03

(*) For the Use phase and according to the current PCR, the information modules B1, B3, B4, B5 and B7, all having indicator values equal to «0» (zero), are not listed in this table
In accordance with current PCR rules, the environmental indicator values in the «Module D» column must not be summed with the values in the «Total Life Cycle» column

The values of the indicators defined in the PCR-ed4-EN-2021 09 06 are available in the digital database of pep-ecopassport.org website.

Product Environmental Profile

GLO-4 LADDER MD-HR-100X200-RS 300



For products covered by the PEP other than the Reference Product, the environmental impacts of each phase of the lifecycle are calculated multiplying the values of environmental indicators for the correspondent coefficient:

Designation	Correction factor to apply to each indicators, for each life cycle steps or to the total life cycle	Designation	Correction factor to apply to each indicators, for each life cycle steps or to the total life cycle
GLO4 MD 60/3/200 HR - 300mm	0,78	GLO4 MD 100/3/600 HR - 200mm	1,65
GLO4 MD 60/3/300 HR - 300mm	0,88	GLO4 MD 100/3/900 HR - 200mm	2,30
GLO4 MD 60/3/400 HR - 300mm	1,01	GLO4 MD 150/3/200 HR - 200mm	1,43
GLO4 MD 60/3/500 HR - 300mm	1,16	GLO4 MD 150/3/300 HR - 200mm	1,57
GLO4 MD 60/3/600 HR - 300mm	1,26	GLO4 MD 150/3/400 HR - 200mm	1,79
GLO4 MD 100/3/200 HR - 300mm	1,00	GLO4 MD 150/3/450 HR - 200mm	1,78
GLO4 MD 100/3/300 HR - 300mm	1,10	GLO4 MD 150/3/500 HR - 200mm	1,97
GLO4 MD 100/3/400 HR - 300mm	1,25	GLO4 MD 150/3/600 HR - 200mm	2,10
GLO4 MD 100/3/500 HR - 300mm	1,41	GLO4 MD 150/3/900 HR - 200mm	2,70
GLO4 MD 100/3/600 HR - 300mm	1,51	GLO4 MD 60/3/200 HR - 100mm	0,95
GLO4 MD 100/3/900 HR - 300mm	2,09	GLO4 MD 60/3/300 HR - 100mm	1,14
GLO4 MD 150/3/200 HR - 300mm	1,39	GLO4 MD 60/3/400 HR - 100mm	1,36
GLO4 MD 150/3/300 HR - 300mm	1,50	GLO4 MD 60/3/500 HR - 100mm	1,61
GLO4 MD 150/3/400 HR - 300mm	1,70	GLO4 MD 60/3/600 HR - 100mm	1,80
GLO4 MD 150/3/450 HR - 300mm	2,18	GLO4 MD 100/3/200 HR - 100mm	1,16
GLO4 MD 150/3/500 HR - 300mm	1,85	GLO4 MD 100/3/300 HR - 100mm	1,36
GLO4 MD 150/3/600 HR - 300mm	1,96	GLO4 MD 100/3/400 HR - 100mm	1,60
GLO4 MD 150/3/900 HR - 300mm	2,49	GLO4 MD 100/3/500 HR - 100mm	1,85
GLO4 MD 60/3/200 HR - 200mm	0,82	GLO4 MD 100/3/600 HR - 100mm	2,06
GLO4 MD 60/3/300 HR - 200mm	0,94	GLO4 MD 100/3/900 HR - 100mm	2,91
GLO4 MD 60/3/400 HR - 200mm	1,10	GLO4 MD 150/3/200 HR - 100mm	1,61
GLO4 MD 60/3/500 HR - 200mm	1,27	GLO4 MD 150/3/300 HR - 100mm	1,76
GLO4 MD 60/3/600 HR - 200mm	1,40	GLO4 MD 150/3/400 HR - 100mm	2,06
GLO4 MD 100/3/200 HR - 200mm	1,04	GLO4 MD 150/3/450 HR - 100mm	1,88
GLO4 MD 100/3/300 HR - 200mm	1,16	GLO4 MD 150/3/500 HR - 100mm	2,30
GLO4 MD 100/3/400 HR - 200mm	1,34	GLO4 MD 150/3/600 HR - 100mm	2,50
GLO4 MD 100/3/500 HR - 200mm	1,52	GLO4 MD 150/3/900 HR - 100mm	3,20

Product Environmental Profile

GLO-4 LADDER
MD-HR-100X200-RS 300



Registration number: LGRP-02153-V01.01-EN	Drafting rules: « PEP-PCR-ed4-EN-2021 09 06 » Supplemented by «PSR-0003-ed2.1-EN-2023 12 08 »
Verifier accreditation N°: VH08	Information and reference documents : www.pep-ecopassport.org
Date of issue : 05-2025	Validity period : 5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2006	
Internal ☐ External ☒	
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)	
PEP are compliant with XP C08-100-1 :2016 or EN 50693 :2019	
The elements of the present PEP cannot be compared with elements from another program	
Document in compliance with ISO 14025 : 2006: «Environmental labels and declarations. Type III environmental declarations»	



Environmental data in alignment with EN 15804: 2012 + A2 : 2019