

Onefold faceplate, for single switch functions, Niko Rocker alu black brushed


224-56101



The Niko Rocker onefold faceplate clicks onto a single installed switch function. The faceplate combines with any available Niko Rocker for single switch functions.

It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upperframe is made of aluminium. The lower frame is made of dark grey, black coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 6 mm thick and the lower frame 2 mm.

Niko recommends a design combination with the Niko Rocker in the following colour: alu black.

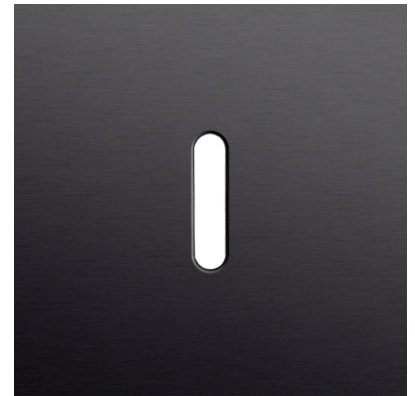

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)

Technical data

Onefold faceplate, for single switch functions, Niko Rocker alu black brushed.

- Simple faceplate for one switch.
- Colour faceplate: alu black brushed
- Colour RAL (approximately): 000 20 00
- Colour NCS (approximately): NCS S 8005-R50B
- Recommended colour central plate: alu black
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of aluminium. The lower frame is made of dark grey, black coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA).
- Surface treatment: anodised
- Surface finishing: matt
- Coating lower frame: enamelled black
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Recess for indication led:
 - the faceplate is fitted with a light guide

- the light guide is made of a translucent plastic
- the light guide transports the light from the optional LED to the lever
- please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Surface-mounting height: max. 8.5 mm
- Halogen-free: yes
- Fire safety:
 - self-extinguishing: complies with a filament test of 650°C
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 83 mm x 12 mm
- Dimensions visible (HxWxD): 83 mm x 83 mm
- Certification marks: CEBEC, NF
- Marking: EU