

Onefold faceplate, for double switch functions, Niko Rocker steel champagne coated

166-56102



The Niko Rocker onefold faceplate for a double switch clicks onto a single installed double switch function. The faceplate combines with any available Niko Rocker for double switch functions.


It consists of an upper frame, light guide and lower frame that are mechanically interconnected.

The light guide is made of a translucent plastic and transports the light from the optional LED to the lever.

The upperframe is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 2 mm thick and the lower frame 6 mm.

Niko recommends a design combination with the Niko Rocker in the following colour: steel champagne coated.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)

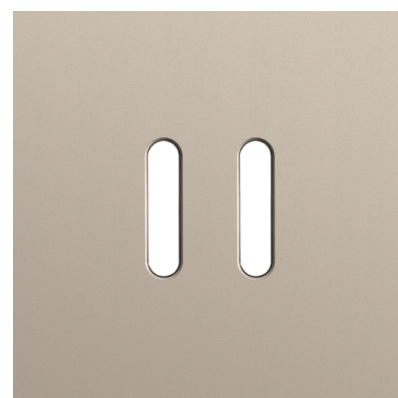

Technical data

Onefold faceplate, for double switch functions, Niko Rocker steel champagne coated.

- Simple faceplate for one switch.
- Colour faceplate: steel champagne coated
- Colour RAL (approximately): 080 70 10
- Colour NCS (approximately): NCS S 4005-Y20R
- Recommended colour central plate: steel champagne coated
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of steel. The lower frame is made of white, champagne coated polycarbonate (PC) + acrylic-styrene-

acrylate (ASA).

- Surface treatment: coated
- Surface finishing: matt
- Coating upper frame: the upperframe is enamelled champagne
- Coating lower frame: enamelled champagne
- Frame thickness: The upper frame is 2 mm thick and the lower frame 6 mm.
- Recess for indication led:
 - the faceplate is fitted with a light guide
 - the light guide is made of a translucent plastic
 - the light guide transports the light from the optional LED to the lever
 - please note that the faceplate should not be mounted upside down to ensure that the optional LED fits nicely with the light guide
- Surface-mounting height: max. 8.5 mm
- Halogen-free: yes
- Fire safety:
 - self-extinguishing: complies with a filament test of 650°C
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 83 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 83 mm
- Certification marks: CEBEC, NF
- Marking: EU