


Flush-mounting external unit with 10 bells and colour camera

10-310



This ultra-flat flush-mounting unit is finished with 3 mm-thick aluminium. It is equipped with a colour camera. The external unit is equipped with a 5 mm-thick name plate in Plexiglas which is vandal proof. The metal-plated push-button contacts are maintenance-free and durable. The external unit includes the flush-mounting box. This external unit has 10 bells.

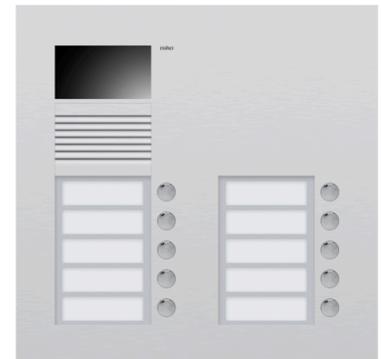

Technical data

Flush-mounting external unit with 10 bells and colour camera.

- Function:
 - each non-programmed push button can operate the light, light symbol supplied
 - Acknowledgement tone when pressing the bell button
 - material push buttons: metal with gilded, maintenance-free contacts
 - long-life energy-saving name plate lighting
 - 5 mm thick, indestructible and vandal proof name place in Plexiglass
 - internal memory for the exchange of data between identical external units (EEPROM)
- Type of fastening:
 - win:clip principle
- Mounting method: flush-mounting
- Dimensions front plate: 274 x 274 x 3 mm (HxWxD)
- Dimensions flush-mounting box: 225 x 250 x 40 mm (HxWxD)
- Dimensions info field: 19 x 62 mm (HxW)
- Microphone: volume and microphone sensitivity can be adjusted manually
- With camera: true
- Camera angle: 130°
- Camera details:
 - features of colour camera:
 - type: CMOS sensor
 - resolution: 380 horizontal TV lines
 - focal length: 2.0 mm (F=2.5)
 - light sensitivity: 0 lux with IR, 1 lux without IR
 - video output: 1 Vpp, symmetrical
- Wiring technique: 6-wire technology required
- Extra terminal:
 - extra terminal for the local control of a 24 V DC contact.

– adjustable time settings such as the door opener time, the activation time and the conversation time

- Input current standby: $I(a) = 0.8 \text{ mA}$, $I(P) = 156 \text{ mA}$
- Input current: 160 mA
- Material finishing: aluminium
- Material thickness: 3
- Colour: grey
- Marking: CE